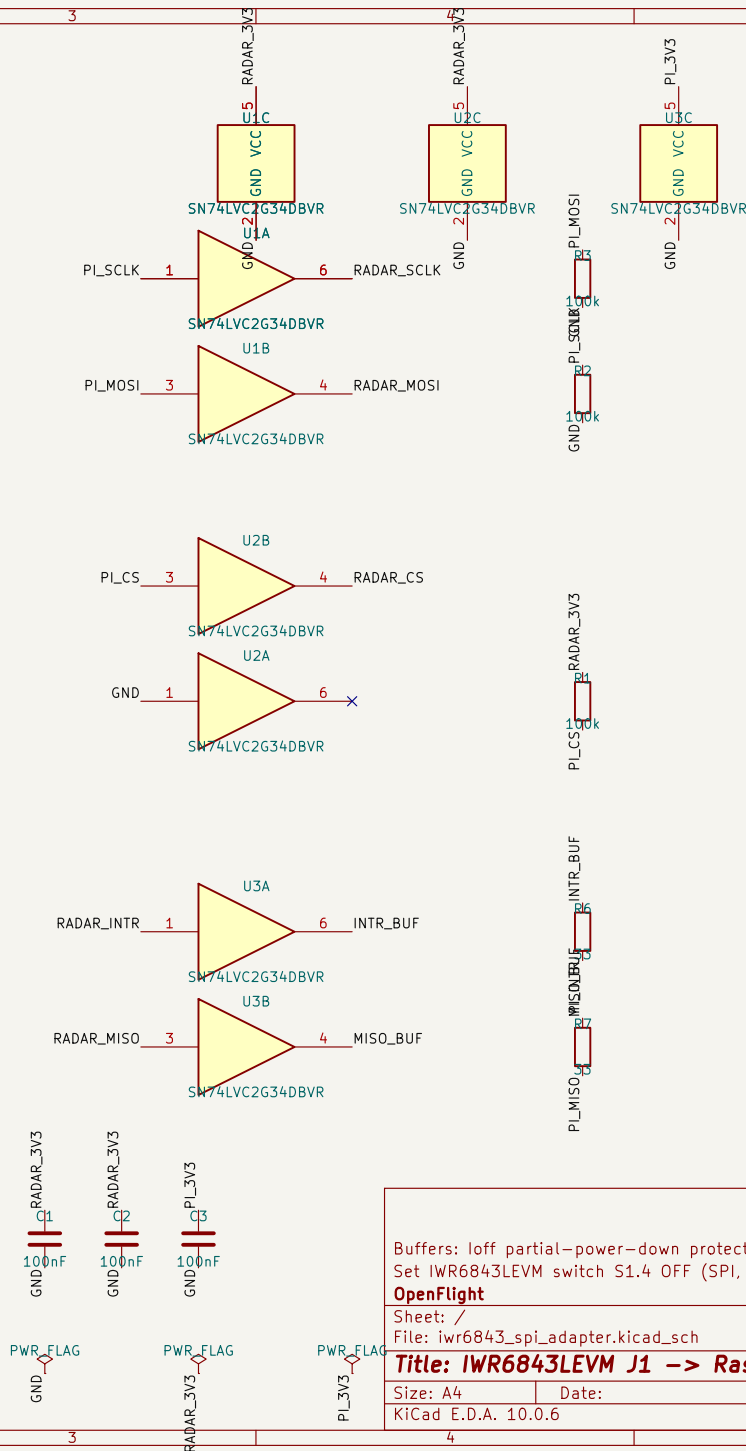
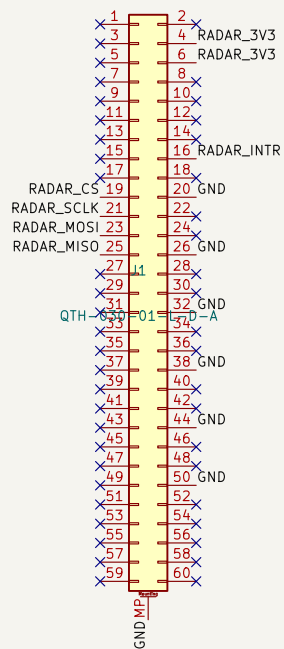


Pi 5 wiring (jumpers, <=15 cm, twist each signal with its GND):

J2.1 3V3->Pi pin 1 | J2.3 INTR->Pi 22 (GPIO25) | J2.5 MISO->Pi 21 (GPIO9)

J2.7 MOSI->Pi 19 (GPIO10) | J2.9 SCLK->Pi 23 (GPIO11) | J2.11 CS->Pi 24 (CE0)

J2 even pins GND -> Pi pins 6/9/14/20/25. Do NOT connect LEVM J1 5V (pin 2).

Buffers: loff partial-power-down protects both sides
Set IWR6843LEVM switch S1.4 OFF (SPI, not CAN)

OpenFlight

Sheet: /
File: iwr6843_spi_adapter.kicad_sch

Title: IWR6843LEVM J1 -> Raspberry Pi 5 SPI adapter

Size: A4	Date:	Rev: A
KiCad E.D.A. 10.0.6		Id: 1/1