


ECA1411-EMBEDDED SYSTEM

LAB MANUAL

Exp No:14- EMBEDDED C PROGRAM TO DISPLAY “HELLO WORLD” MESSAGE

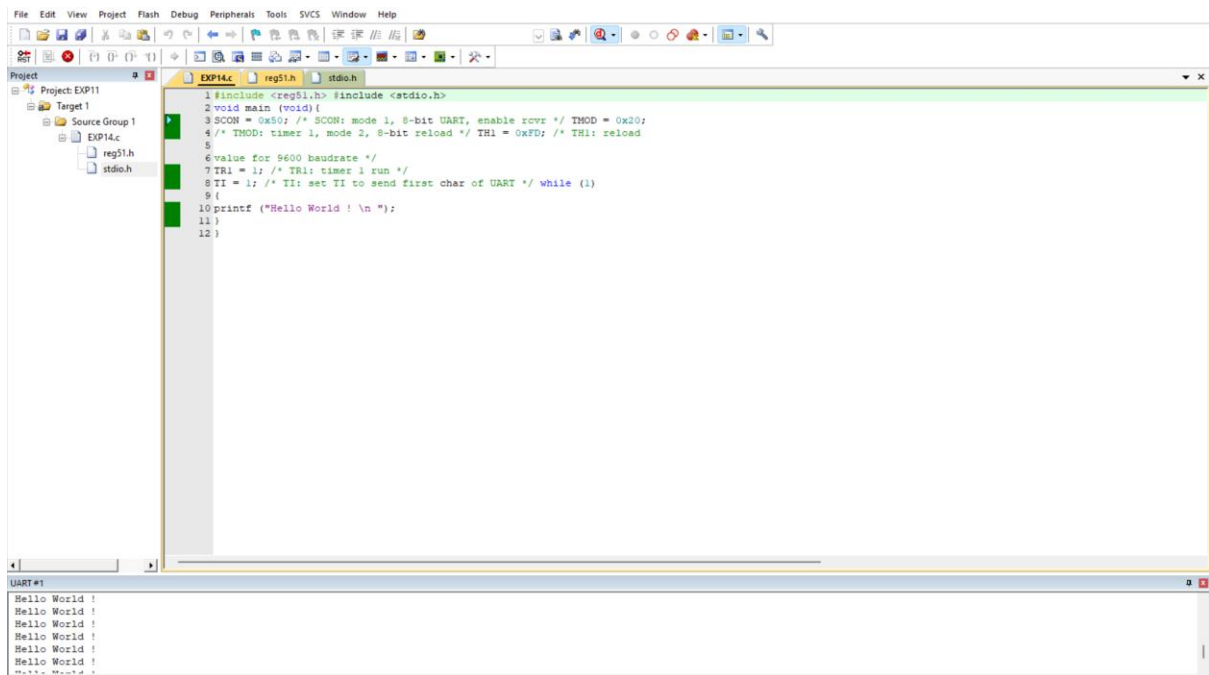

The screenshot shows an IDE with a project named 'Project: EXP11'. The project structure includes a 'Source Group 1' with files 'EXP14.c', 'reg51.h', and 'stdio.h'. The main file 'EXP14.c' contains the following code:

```
1 #include <reg51.h> #include <stdio.h>
2 void main (void) {
3     SCON = 0x50; /* SCON: mode 1, 8-bit UART, enable rcvr */ TMOD = 0x20;
4     /* TMOD: timer 1, mode 2, 8-bit reload */ TH1 = 0xFD; /* TH1: reload
5
6     value for 9600 baudrate */
7     TR1 = 1; /* TR1: timer 1 run */
8     TI = 1; /* TI: set TI to send first char of UART */ while (1)
9     {
10     printf ("Hello World ! \n ");
11     }
12 }
```

At the bottom of the IDE, the UART#1 window displays the output of the program, showing the message 'Hello World !' repeated multiple times.