

Learning Formulation Optimisation for Obstacle Avoidance in Autonomous Racing

Benjamin Evans

1 Introduction

This paper explores the effect of training parameters on an agent learning the task of unmapped obstacle avoidance in autonomous racing. The serial agent planning architecture is used for the evaluation. For each study, tests are run for a set of perturbations from baseline values. Several parameters are chosen for study.

1.1 Evaluation Methodology

The simulations are run in the custom built F1/10th simulator. The task is to use a LiDAR scan and the vehicles current heading and velocity to determine the steering angle that will lead the vehicle to the end of the forest without colliding with any obstacles.

The base learning formulation uses a reward signal that rewards progress along the track. The track is a straight 20m long section of road with 4 obstacles randomly spawned on each episode.

1.2 Metrics

The two main metrics are performance and success rate, since these are the measure of racing performance. The sample efficiency, repeatability and robustness of the policy are also measured.

2 Repeatability & Distribution

The repeatability of the training and testing is studied to measure the statistical significance of the results. An agent is trained 10 times with the same parameters and the distribution of the results is studied.

3 Learning Parametes

The learning setup parameters of the number of beams used in the LiDAR scan, the number of training steps trained for, and the size of the hidden layers of the network are evaluated for their effect on the results.

3.1 Neural Network Architecture

The number of neurons in the two hidden layers of the networks is changed to determine if this has an effect on the agents ability to learn an accurate policy. A similar approach, using 60 range finders and several state variables, used networks with two hidden layers of 256 neurons. Considering that we are generally using few range finder readings, we perturb this value downwards to see if it has any effect on the outcome.


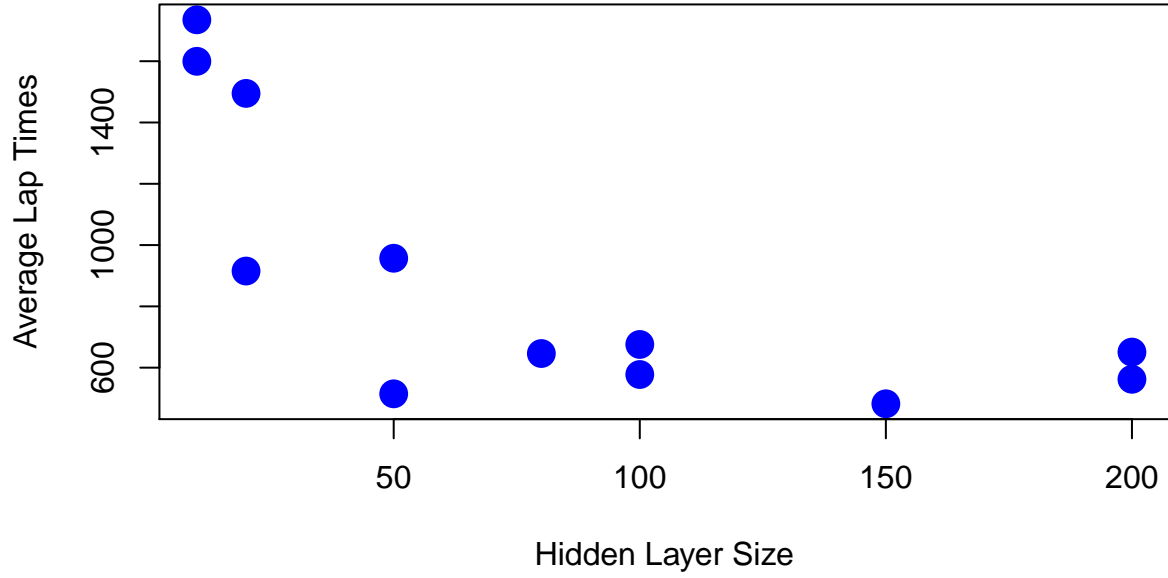


Figure @ref(fig:h_size_fig) shows how for different hidden layer sizes after 100 neurons, there is a negligible change in the performance of the vehicle. For smaller network sizes, the average lap times become a lot worse. Therefore, 100 neurons is chosen as the size to be used.

3.2 Number of LiDAR Beams

LiDAR sensors provides dense spatial data of the surrounding environment and can have up to 1000 beams. Only several beams are sampled from the full scan to keep training times fast and the network small. Originally 10 beams were used to build on work by Tai et al.

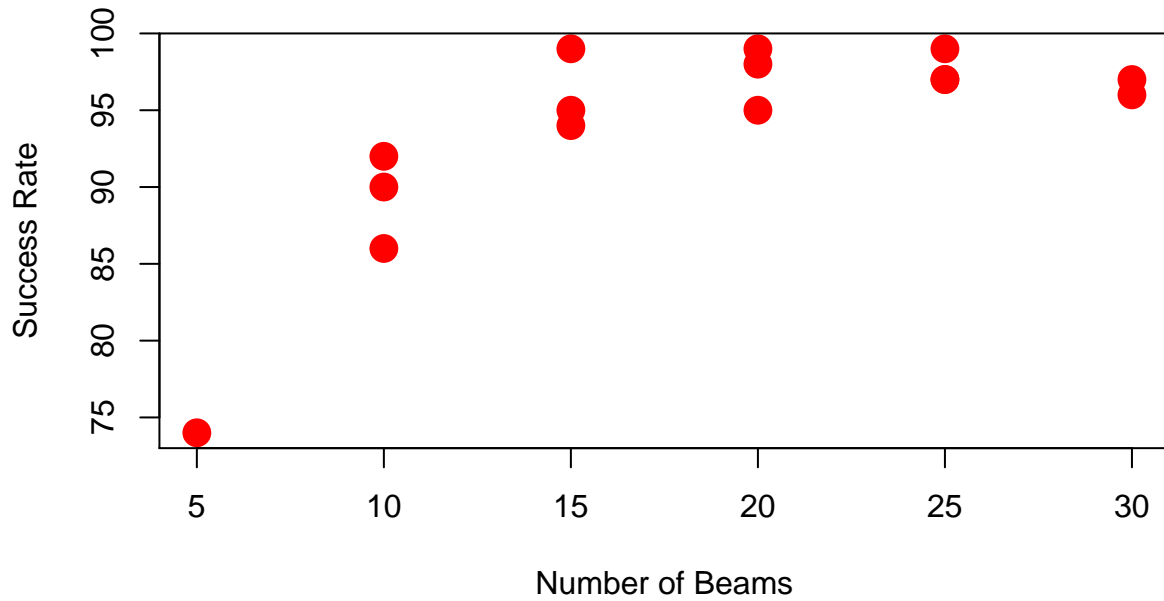


The results show that using 15 range finders has a marked difference over using only 10. Above 15 range finders the performance levels off. Therefore, 15 range finders are selected for use.


Further study on the LiDAR scan could look at the distance used for scaling and clipping, the effect of noise in the readings and the field of view.

3.3 Training Steps

While reinforcement has the advantage of being able to learn from the agent's own experience, it is often sample inefficient. The number of steps required to train the agent to convergence is measured.

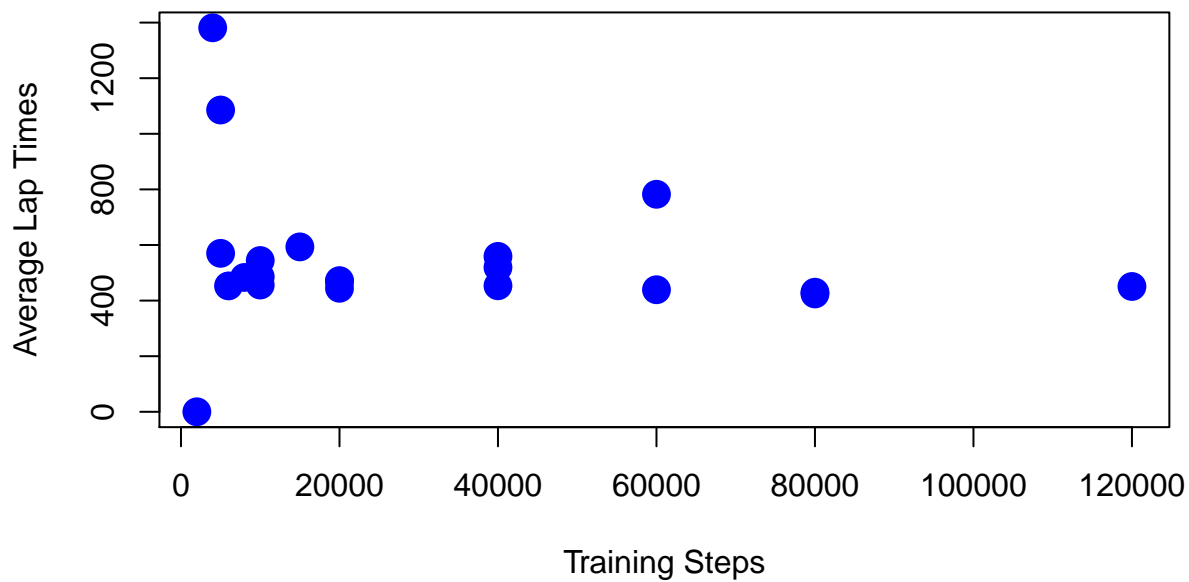

The graph shows that the performance levels out after 20,000 training steps. Therefore, the training time is decreased. The next figure provides a more zoomed in look at the success rate for shorter training steps.

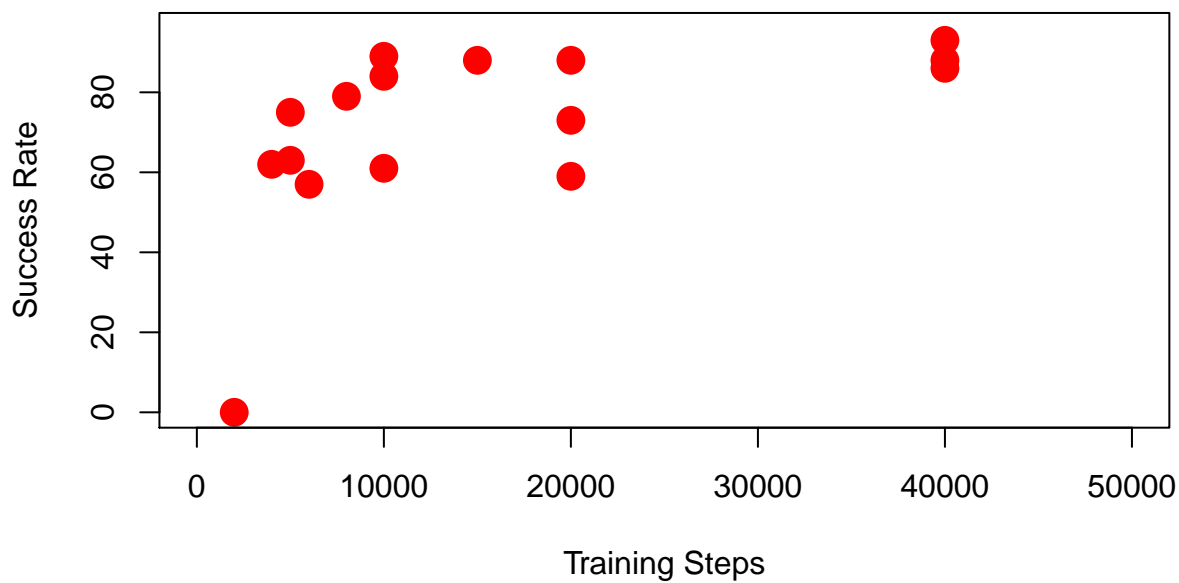

4 Reward Signals

4.1 Comparison

Five different reward signals are selected and used to train agents. The table below shows the average results from training 5 agents with each reward signal.

4.2 Progress Hyper-Parameters

The progress-based reward signal is then selected for further study. The reward consists of three different terms that are individually adjusted to determine their effect. An additional change is to consider the distance squared at each timestep.

5 Future Studies

The follow future studies can be carried out: - Algorithm used, specifically TD3 vs SAC - Window stacking, does stacking 2 or 3 windows help? - Effect of each state variable, are the current velocity and steering needed?

6 Conclusions

This report focused on the evaluation and tuning on the serial planning architecture for unmapped obstacle avoidance. The table below presents the final values that were selected to produce the best performance.

Parameter	Value
Hidden layer size	100
Training steps	20000
LiDAR beams	15
Reward Signal	