GigaDevice Semiconductor Inc.

GD32470I-EVAL

User Guide V2.0



Table of Contents

TΑ	BLE	OF CONTENTS	. 1
LIS	ТО	F FIGURES	. 4
LIS	то	PF TABLES	. 5
1.	SU	MMARY	. 6
2.	FUI	NCTION PIN ASSIGNMENT	. 6
3.		TTING STARTED	
-		RDWARE LAYOUT OVERVIEW	
	.1.	Power supply	
_	.2.	Boot option	
	.3.	LED	
4	.4.	KEY	
4	.5.	USART	13
4	.6.	ADC	13
4	.7.	DAC	14
4	.8.	12\$	14
4	.9.	I2C	14
4	.10.	SPI	15
4	.11.	CAN	15
4	.12.	ENET	
4	.13.	SDIO	16
	.14.	NAND flash	
	.15.	SDRAM	
	.16.	DCI	
	.17.	LCD	
	.18.	USBFS	
	.10.	USBHS	
_	.19.	Extension	
_	.20. .21.	GD-Link	
5.	RO	OUTINE USE GUIDE2	21
5	.1.	GPIO_Running_LED	21
	5.1. ¹		
	5.1.2	· ·	
5	.2.	· ·	
J	. 2. 5.2.	- ·- ·-	
	5.2.	·	
_			
ວ	.3.	EXTI_Key_Interrupt_mode	44



5.3.1.	DEMO purpose	22
5.3.2.	DEMO running result	22
5.4. US	SART_Printf	22
5.4.1.	DEMO purpose	22
5.4.2.	DEMO running result	22
5.5. US	SART_Echo_Interrupt_mode	23
5.5.1.	DEMO purpose	23
5.5.2.	DEMO running result	23
5.6. US	SART_DMA	23
5.6.1.	DEMO purpose	
5.6.2.	DEMO running result	23
5.7. AD	DC_Temperature_Vrefint	24
5.7.1.	DEMO purpose	24
5.7.2.	DEMO running result	24
5.8. AD	OC0_ADC1_Follow_up_mode	25
5.8.1.	DEMO purpose	25
5.8.2.	DEMO running result	25
5.9. AD	DC0_ADC1_Regular_Parallel_mode	26
5.9.1.	DEMO purpose	26
5.9.2.	DEMO running result	26
5.10. I	DAC_Output_Voltage_Value	27
5.10.1.	DEMO purpose	27
5.10.2.	DEMO running result	27
5.11. I	2C_EEPROM	27
5.11.1.	DEMO purpose	27
5.11.2.	DEMO running result	28
5.12.	SPI_QSPI_Flash	28
5.12.1.	DEMO purpose	28
5.12.2.	DEMO running result	29
5.13. I	2S_Audio_Player	30
5.13.1.	DEMO purpose	30
5.13.2.	DEMO running result	31
5.14. I	EXMC_SDRAM	31
5.14.1.	DEMO purpose	31
5.14.2.	DEMO running result	31
5.15. I	EXMC_SDRAM_DeepSleep	32
5.15.1.	DEMO purpose	32
5.15.2.	DEMO running result	33
5.16. I	EXMC_NandFlash	35
5.16.1.	DEMO purpose	35
5.16.2.	DEMO running result	35
5.17.	SDIO_SDCardTest	35
5.17.1.	DEMO purpose	35



5.17.2. DEMO running result	36
5.18. CAN_Network	36
5.18.1. DEMO purpose	36
5.18.2. DEMO running result	37
5.19. RCU_Clock_Out	37
5.19.1. DEMO purpose	37
5.19.2. DEMO running result	37
5.20. CTC_Calibration	38
5.20.1. DEMO purpose	38
5.20.2. DEMO running result	38
5.21. PMU_sleep_wakeup	38
5.21.1. DEMO purpose	38
5.21.2. DEMO running result	38
5.22. RTC_Calendar	39
5.22.1. DEMO purpose	39
5.22.2. DEMO running result	39
5.23. TIMER_Breath_LED	39
5.23.1. DEMO purpose	39
5.23.2. DEMO running result	39
5.24. TLI_IPA	40
5.24.1. DEMO purpose	40
5.24.2. DEMO running result	40
5.25. DCI_OV2640	40
5.25.1. DEMO purpose	40
5.25.2. DEMO running result	
5.26. TRNG_Get_Random	41
5.26.1. DEMO purpose	41
5.26.2. DEMO running result	42
5.27. ENET	42
5.27.1. FreeRTOS_tcpudp	
5.27.2. Raw_tcpudp	44
5.27.3. Raw_webserver	
5.28. USB_Device	
5.28.1. HID_Keyboard	49
5.28.2. MSC_Udisk	
5.29. USB_Host	52
5.29.1. HID_Host	
5.29.2. MSC_Host	55
6. REVISION HISTORY	56



List of Figures

Figure 4-1 Schematic diagram of power supply11
Figure 4-2 Schematic diagram of boot option11
Figure 4-3 Schematic diagram of LED function11
Figure 4-4 Schematic diagram of Key function12
Figure 4-5 Schematic diagram of USART0 function13
Figure 4-6 Schematic diagram of ADC function13
Figure 4-7 Schematic diagram of DAC function14
Figure 4-8 Schematic diagram of I2S function14
Figure 4-9 Schematic diagram of I2C function14
Figure 4-10 Schematic diagram of SPI function15
Figure 4-11 Schematic diagram of CAN function15
Figure 4-12 Schematic diagram of Ethernet function 16
Figure 4-13 Schematic diagram of SDIO function16
Figure 4-14 Schematic diagram of NAND flash function17
Figure 4-15 Schematic diagram of SDRAM function17
Figure 4-16 Schematic diagram of DCI function18
Figure 4-17 Schematic diagram of LCD function 18
Figure 4-18 Schematic diagram of USBFS function 19
Figure 4-19 Schematic diagram of USBHS function19
Figure 4-20 Schematic diagram of Extension Pin20
Figure 4-21 Schematic diagram of GD-Link20



List of Tables

Table 2-1 Function pin assignment 6	
Table 6-1 Revision history56	



1. Summary

GD32470i-EVAL uses GD32F470IKH6 as the main controller. It uses Mini USB interface or DC-005 connector to supply 5V power. SWD, Reset, Boot, User button key, LED, CAN, I2C, I2S, USART, RTC, LCD, SPI, ADC, DAC, EXMC, CTC, SDIO, DCI, ENET, USBFS, USBHS, GD-Link and Extension Pins are also included. For more details please refer to GD32470i-EVAL-V1.0 schematic.

2. Function pin assignment

Table 2-1 Function pin assignment

Function	Pin	Description				
	PE2	LED1				
LED	PE3	LED2				
	PF10	LED3				
RESET		K1-Reset				
	PA0	K2-Wakeup				
KEY	PC13	K3-Tamper				
	PB14	K4-User key				
LICADTO	PA9	USART0_TX				
USART0	PA10	USART0_RX				
ADC	PC3	ADC012_IN13				
DAC	PA4	DAC_OUT0				
120	PB6	I2C0_SCL				
I2C	PB7	I2C0_SDA				
	PG10	SPI5_IO2				
	PG11	SPI5_IO3				
SPI	PG13	SPI5_SCK				
581	PG14	SPI5_MOSI				
	PG12	SPI5_MISO				
	PI8	SPIFlash_CS				
	PA6	I2S1_MCK				
I2S	PI1	I2S1_CK				
125	PI0	I2S1_WS				
	PC1	I2S1_SD				
CAN	PB8	CAN0_RX				
CAN	PB9	CAN0_TX				
NAND Flash	PD4	EXMC_NOE				





		GD32470I-EVAL
	PD5	EXMC_NWE
	PD6	EXMC_NWAIT
	PD7	EXMC_NCE1
	PD11	EXMC_A16
	PD12	EXMC_A17
	PD14	EXMC_D0
	PD15	EXMC_D1
	PD0	EXMC_D2
	PD1	EXMC_D3
	PE7	EXMC_D4
	PE8	EXMC_D5
	PE9	EXMC_D6
	PE10	EXMC_D7
	PD14	EXMC_D0
	PD15	EXMC_D1
	PD0	EXMC_D2
	PD1	EXMC_D3
	PE7	EXMC_D4
	PE8	EXMC_D5
	PE9	EXMC_D6
	PE10	EXMC_D7
	PE11	EXMC_D8
	PE12	EXMC_D9
	PE13	EXMC_D10
	PE14	EXMC_D11
	PE15	EXMC_D12
SDRAM	PD8	EXMC_D13
SDRAW	PD9	EXMC_D14
	PD10	EXMC_D15
	PE0	EXMC_NBL0
	PE1	EXMC_NBL1
	PC5	EXMC_SDCKE0
	PG4	EXMC_BA0
	PG5	EXMC_BA1
	PG8	EXMC_SDCLK
	PG15	EXMC_SDNCAS
	PF11	EXMC_SDNRAS
	PC2	EXMC_SDNE0
	PH5	EXMC_SDNWE
	PF0	EXMC_A0
	PF1	EXMC_A1





		GD32470I-EVAL
	PF2	EXMC_A2
	PF3	EXMC_A3
	PF4	EXMC_A4
	PF5	EXMC_A5
	PF12	EXMC_A6
	PF13	EXMC_A7
	PF14	EXMC_A8
	PF15	EXMC_A9
	PG0	EXMC_A10
	PG1	EXMC_A11
	PG2	EXMC_A12
	PD2	SDIO_CMD
	PC12	SDIO_CK
0010	PC8	SDIO_D0
SDIO	PC9	SDIO_D1
	PC10	SDIO_D2
	PC11	SDIO_D3
	PB6	DCI_I2C0_SCL
	PB7	DCI_I2C0_SDA
	PA4	DCI_HSYNC
	PG9	DCI_VSYNC
	PA6	DCI_PIXCLK
	PA8	DCI_XCLK
	PB9	DCI_D7
DCI	PB8	DCI_D6
	PD3	DCI_D5
	PC11	DCI_D4
	PC9	DCI_D3
	PC8	DCI_D2
	PC7	DCI_D1
	PC6	DCI_D0
	PI3	LCD_Touch_PENIRQ
	PF9	LCD_SPI4_MOSI
	PF8	LCD_SPI4_MISO
	PF7	LCD_SPI4_SCK
1.05	PF6	LCD_SPI4_NSS
LCD	PB15	LCD_PWM_BackLight
	PH7	LCD_Touch_Busy
	PH2	LCD_R0
	PH3	LCD_R1
	PH8	LCD_R2





		GD324701-LVAL
	PH9	LCD_R3
	PH10	LCD_R4
	PH11	LCD_R5
	PH12	LCD_R6
	PG6	LCD_R7
	PE5	LCD_G0
	PE6	LCD_G1
	PH13	LCD_G2
	PH14	LCD_G3
	PH15	LCD_G4
	PI0	LCD_G5
	PI1	LCD_G6
	PI2	LCD_G7
	PE4	LCD_B0
	PG12	LCD_B1
	PG10	LCD_B2
	PG11	LCD_B3
	PI4	LCD B4
	PI5	LCD_B5
	PI6	LCD_B6
	PI7	LCD_B7
	PG7	LCD_CLK
	PI10	LCD_HSYNC
	PI9	LCD_VSYNC
	PF10	LCD_DE
	PA1	ETH_RMII_REF_CLK
	PA2	ETH_MDIO
	PA7	ETH_RMII_CRS_DV
	PG11	ETH_RMII_TX_EN
	PG13	ETH_RMII_TXD0
Ethernet	PG14	ETH_RMII_TXD1
	PC1	ETH_MDC
	PC4	ETH_RMII_RXD0
	PC5	ETH_RMII_RXD1
	PA8	CK_OUT0
	PA9	USBFS_VBUS
USB_FS	PA11	USBFS_DM
	1	
	PA12	USBFS DP
	PA12 PH4	USBFS_DP USB HS ULPI NXT
USB_HS	PA12 PH4 PI11	USBFS_DP USB_HS_ULPI_NXT USB_HS_ULPI_DIR



		0202
	PA5	USB_HS_ULPI_CK
	PB5	USB_HS_ULPI_D7
	PB13	USB_HS_ULPI_D6
	PB12	USB_HS_ULPI_D5
	PB11	USB_HS_ULPI_D4
	PB10	USB_HS_ULPI_D3
	PB1	USB_HS_ULPI_D2
	PB0	USB_HS_ULPI_D1
	PA3	USB_HS_ULPI_D0

3. Getting started

The EVAL board uses Mini USB connecter or DC-005 connector to get power DC +5V, which is the hardware system normal work voltage. Three kinds of different USB power supply which are USB_FS, USB_HS_ULPI, GD-Link can be chosen through JP4. A J-Link tool or GD-Link on board is necessary in order to download and debug programs. Select the correct boot mode and then power on, the LED5 will turn on, which indicates that the power supply is OK.

There are Keil version and IAR version of all projects. Keil version of the projects are created based on Keil MDK-ARM 4.74 uVision4. IAR version of the projects are created based on IAR Embedded Workbench for ARM 7.40.2. In Firmware folder, Addon and Software Pack are used to add the devices, peripherals and others to IDE. During use, the following points should be noted:


- 1. If you use Keil uVision4 to open the project, install the GD32F4xx_Addon.3.0.0.exe which is in \Library\Firmware to load the associated files.
- 2. If you use Keil uVision5 to open the project, there are two ways to solve the "Device Missing (s)" problem. One is to install GigaDevice.GD32F4xx_DFP.3.0.0.pack which is in \Library\Firmware. In Project menu, select the Manage sub menu, click on the "Version Migrate 5 Format..." menu, the Keil uVision4 project will be converted to Keil uVision5 project. Then add "C:\Keil_v5\ARM\Pack\ARM\CMSIS\4.2.0\CMSIS\Include" to C/C++ in Option for Target. The other is to install Addon directly. Select the installation directory of Keil uVision5 software, such as C:\Keil_v5, in Destination Folder of Folder Selection. Select the corresponding device in Device of Option for Target and add "C:\Keil_v5\ARM\Pack\ARM\CMSIS\4.2.0\CMSIS\Include" to C/C++ in Option for Target. 3. If you use IAR to open the project, install IAR_GD32F4xx_ADDON.3.0.0.exe which is in \Library\Firmware to load the associated files.



4. Hardware layout overview


4.1. Power supply

Figure 4-1 Schematic diagram of power supply

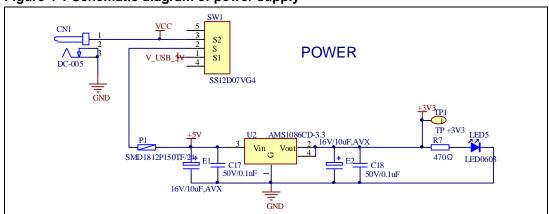

4.2. Boot option


Figure 4-2 Schematic diagram of boot option

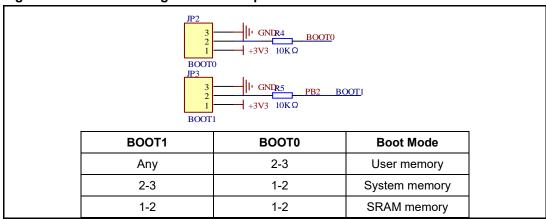

4.3. LED


Figure 4-3 Schematic diagram of LED function



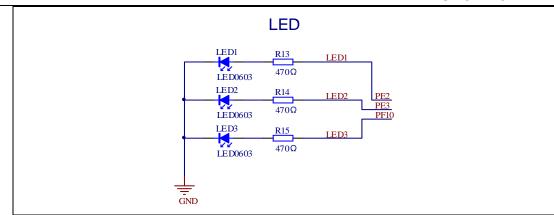

4.4. KEY


Figure 4-4 Schematic diagram of Key function

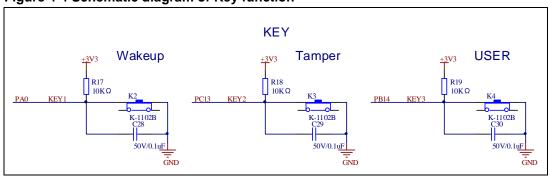




4.5. USART

Figure 4-5 Schematic diagram of USART0 function

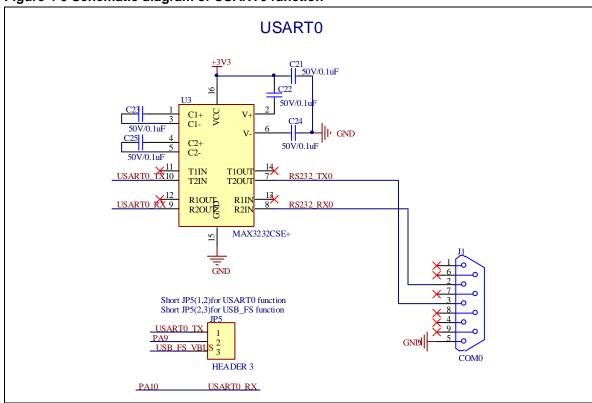

4.6. ADC

Figure 4-6 Schematic diagram of ADC function

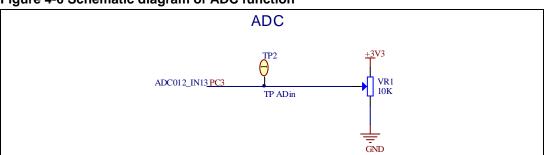




4.7. DAC

Figure 4-7 Schematic diagram of DAC function




4.8. I2S

Figure 4-8 Schematic diagram of I2S function

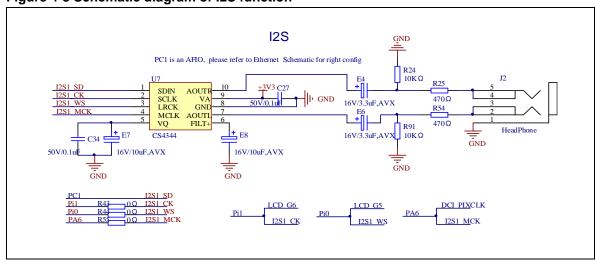

4.9. I2C


Figure 4-9 Schematic diagram of I2C function

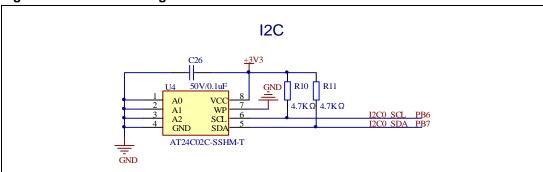




4.10. SPI

Figure 4-10 Schematic diagram of SPI function

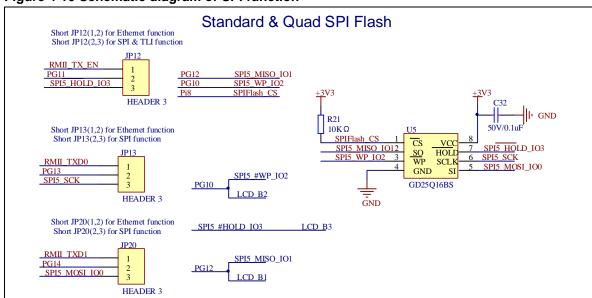

4.11. CAN


Figure 4-11 Schematic diagram of CAN function

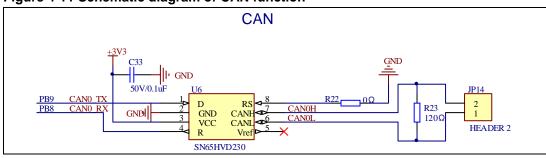




4.12. **ENET**

Figure 4-12 Schematic diagram of Ethernet function

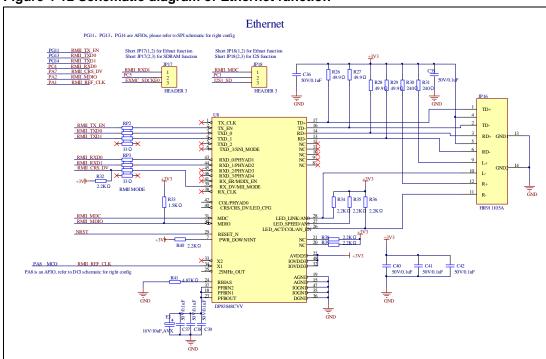

4.13. SDIO


Figure 4-13 Schematic diagram of SDIO function

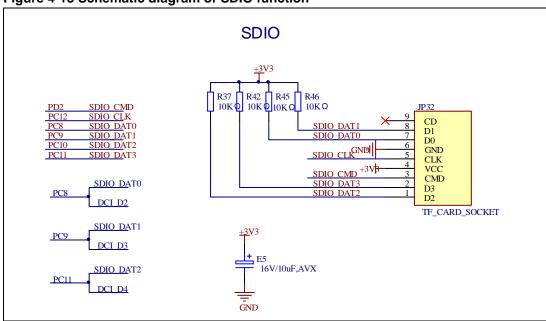




4.14. NAND flash

Figure 4-14 Schematic diagram of NAND flash function

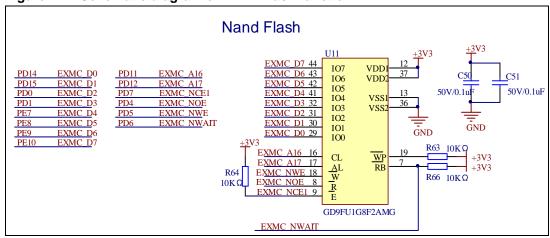

4.15. SDRAM


Figure 4-15 Schematic diagram of SDRAM function

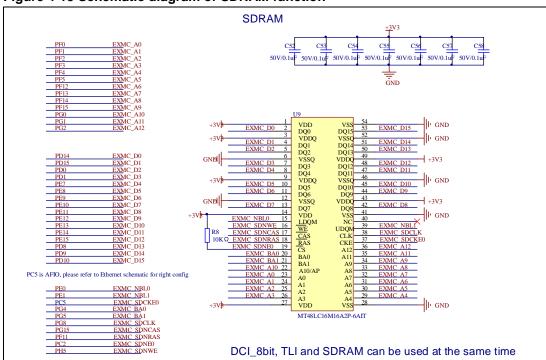




4.16. DCI

Figure 4-16 Schematic diagram of DCI function

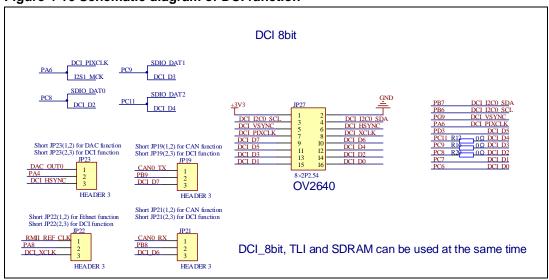

4.17. LCD


Figure 4-17 Schematic diagram of LCD function

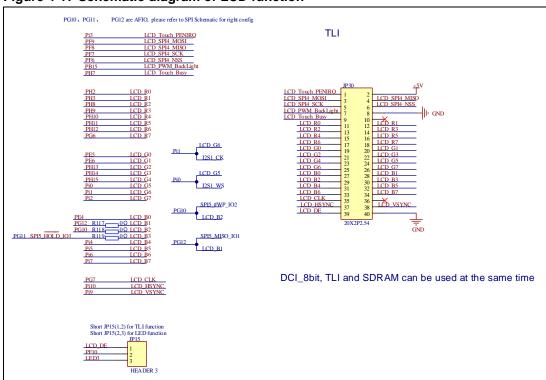




4.18. USBFS

Figure 4-18 Schematic diagram of USBFS function

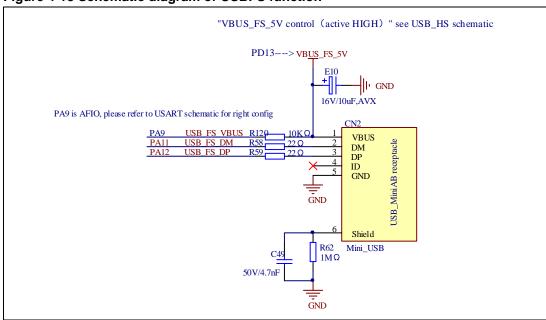

4.19. USBHS


Figure 4-19 Schematic diagram of USBHS function

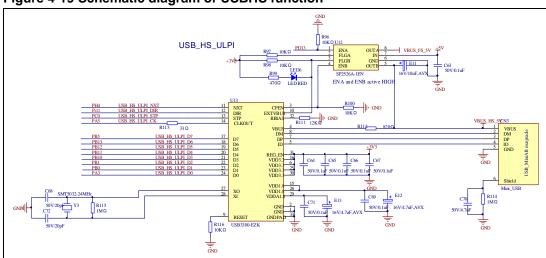




4.20. Extension

Figure 4-20 Schematic diagram of Extension Pin

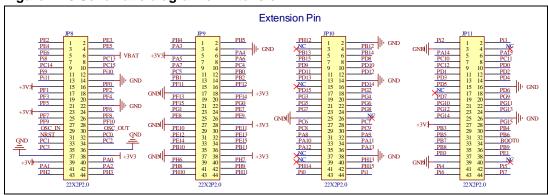

4.21. **GD-Link**

Figure 4-21 Schematic diagram of GD-Link

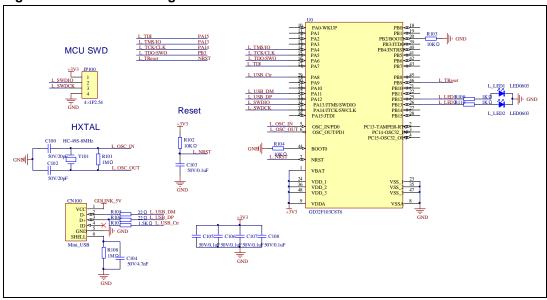



5. Routine use guide

5.1. **GPIO_Running_LED**

5.1.1. DEMO purpose

This demo includes the following functions of GD32 MCU:

- Learn to use GPIO control the LED.
- Learn to use SysTick to generate 1ms delay.

GD32470i-EVAL-V1.0 board has three LEDs. The LED1, LED2 and LED3 are controlled by GPIO. This demo will show how to light the LEDs.

5.1.2. **DEMO** running result

Download the program <01_GPIO_Running_LED> to the EVAL board, LED1, LED2 and LED3 will turn on in sequence with interval of 1000ms, and repeat the process.

5.2. GPIO Key Polling mode

5.2.1. DEMO purpose

This demo includes the following functions of GD32 MCU:

- Learn to use GPIO control the LED and the Key.
- Learn to use SysTick to generate 1ms delay.

GD32470i-EVAL-V1.0 board has four keys and three LEDs. The four keys are Reset key, Tamper key, Wakeup key and User key. The LED1, LED2 and LED3 are controlled by GPIO.

This demo will show how to use the Tamper key to control the LED2. When press down the Tamper Key, it will check the input value of the IO port. If the value is 0 and will wait for 100ms. Check the input value of the IO port again. If the value still is 0, it indicates that the button is pressed successfully and toggle LED2.

5.2.2. DEMO running result

Download the program <02_GPIO_Key_Polling_mode> to the EVAL board, Press down the Tamper Key, LED2 will be turned on. Press down the Tamper Key again, LED2 will be turned off.



5.3. EXTI_Key_Interrupt_mode

5.3.1. DEMO purpose

This demo includes the following functions of GD32 MCU:

- Learn to use GPIO control the LED and the KEY.
- Learn to use EXTI to generate external interrupt.

GD32470i-EVAL-V1.0 board has four keys and three LEDs. The four keys are Reset key, Tamper key, Wakeup key and User key. The LED1, LED2 and LED3 are controlled by GPIO.

This demo will show how to use the EXTI interrupt line to control the LED2. When press down the Tamper Key, it will produce an interrupt. In the interrupt service function, the demo will toggle LED2.

5.3.2. DEMO running result

Download the program <03_EXTI_Key_Interrupt_mode> to the EVAL board, LED2 is turned on and off for test. Press down the Tamper Key, LED2 will be turned on. Press down the Tamper Key again, LED2 will be turned off.

5.4. USART_Printf

5.4.1. DEMO purpose

This demo includes the following functions of GD32 MCU:

- Learn to use GPIO control the LED
- Learn to retarget the C library printf function to the USART

5.4.2. DEMO running result

Download the program < 04_USART_Printf > to the EVAL board, connect serial cable to COM0 and jump JP5 to USART. This implementation outputs "USART printf example: please press the Tamper key" on the HyperTerminal using COM0. Press the Tamper key, the LED3 will be turned on and serial port will output "USART printf example".

The output information via the serial port is as following.

USART printf example: please press the Tamper key

USART printf example



5.5. USART_Echo_Interrupt_mode

5.5.1. DEMO purpose

This demo includes the following functions of GD32 MCU:

■ Learn to use the USART transmit and receive interrupts to communicate with the serial terminal tool.

5.5.2. DEMO running result

Download the program < 05_USART_Echo_Interrupt_mode > to the EVAL board, connect serial cable to COM0 and jump JP5 to USART. Firstly, all the LEDs are turned on and off for test. Then, the COM0 sends the tx_buffer array (from 0x00 to 0xFF) to the serial terminal tool supporting hex format communication and waits for receiving data of BUFFER_SIZE bytes from the serial terminal. The data MCU has received is stored in the rx_buffer array. After that, compare tx_buffer with rx_buffer. If tx_buffer is same with rx_buffer, LED1, LED2, LED3 flash by turns. Otherwise, LED1, LED2, LED3 toggle together.

The output information via the serial port is as following.

```
00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F 10 11 12 13 14 15 16 17 18 19 1A 1B 1C 1D 1E 1F 20 21 22 23 24 25 26 27 28 29 2A 2B 2C 2D 2E 2F 30 31 32 33 34 35 36 37 38 39 3A 3B 3C 3D 3E 3F 40 41 42 43 44 45 46 47 48 49 4A 4B 4C 4D 4E 4F 50 51 52 53 54 55 56 57 58 59 5A 5B 5C 5D 5E 5F 60 61 62 63 64 65 66 67 68 69 6A 6B 6C 6D 6E 6F 70 71 72 73 74 75 76 77 78 79 7A 7B 7C 7D 7E 7F 80 81 82 83 84 85 86 87 88 89 8A 8B 8C 8D 8E 8F 90 91 92 93 94 95 96 97 98 99 9A 9B 9C 9D 9E 9F AO A1 A2 A3 A4 A5 A6 A7 A8 A9 AA AB AC AD AE AF BO B1 B2 B3 B4 B5 B6 B7 B8 B9 BA BB BC BD BE BF CO C1 C2 C3 C4 C5 C6 C7 C8 C9 CA CB CC CD CE CF DO D1 D2 D3 D4 D5 D6 D7 D8 D9 DA DB DC DD DE DF EO E1 E2 E3 E4 E5 E6 E7 E8 E9 EA EB EC ED EE EF FO F1 F2 F3 F4 F5 F6 F7 F8 F9 FA FB FC FD FE FF
```

5.6. USART_DMA

5.6.1. DEMO purpose

This demo includes the following functions of GD32 MCU:

Learn to use the USART transmit and receive data using DMA.

5.6.2. DEMO running result

Download the program < 06_USART_DMA > to the EVAL board, connect serial cable to COM0 and jump JP5 to USART. Firstly, all the LEDs are turned on and off for test. Then, the COM0 sends the tx_buffer array (from 0x00 to 0xFF) to the serial terminal tool supporting hex format communication and waits for receiving data of same bytes as tx_buffer from the serial terminal. The data MCU have received is stored in the rx_buffer array. After that, compare tx buffer with rx buffer. If tx buffer is same with rx buffer,



LED1, LED2, LED3 flash by turns. Otherwise, LED1, LED2, LED3 toggle together.

```
00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F 10 11 12 13 14 15 16 17 18 19 1A 1B
                      22 23 24 25 26 27 28 29 2A 2B 2C 2D 2E 2F 3O 31 32 3E 3F 4O 41 42 43 44 45 46 47 48 49 4A 4B 4C 4D 4E
                  21
3D
   1D 1E 1F 20
                                                                                       33 34
4F 50
              30
54 55 56 57 58 59 5A 5B 5C 5D 5E 5F 60 61 62 63 64 65 66 67 68 69 6A 6B 6C 6D 6E 6F
              74
                      76 77 78 79 7A 7B
                                             7C
                                                 7D 7E
                                                        7F
                                                            80 81 82 83 84 85
8C 8D 8E 8F 9O 91 92 93 94 95 96 97 98 99 9A 9B 9C 9D 9E 9F AO A1 A2 A3 A4 A5 A6 A7
A8 A9 AA AB AC AD AE AF BO B1 B2 B3 B4 B5 B6 B7 B8 B9 BA BB BC BD BE BF CO C1 C2 C3
C4 C5 C6 C7 C8 C9 CA CB CC CD CE CF DO D1 D2 D3 D4 D5 D6 D7 D8 D9 DA DB DC DD DE DF
EO E1 E2 E3 E4 E5 E6 E7 E8 E9 EA EB EC ED EE EF F0 F1 F2 F3 F4 F5 F6 F7 F8 F9 FA FB
FC FD FE FF |
```

5.7. ADC_Temperature_Vrefint

5.7.1. DEMO purpose

This demo includes the following functions of GD32 MCU:

- Learn to use the ADC to convert analog signal to digital data
- Learn to get the value of inner channel 16(temperature sensor channel), channel 17 (VREFINT channel) and channel 18(VBAT/4 channel)

5.7.2. DEMO running result

Jump the JP5 to USART with the jumper cap, and then download the program <07_ADC_Temperature_Vrefint_Vbat> to the board. Connect serial cable to COM0, open the HyperTerminal.

When the program is running, HyperTerminal display the value of temperature, internal voltage reference (VREFINT) and external battery voltage VBAT.

Notice: because there is an offset, when inner temperature sensor is used to detect accurate temperature, an external temperature sensor part should be used to calibrate the offset error.

the temperature data is 24 degrees Celsius the reference voltage data is 1.198V the battery voltage is 3.213V

the temperature data is 25 degrees Celsius the reference voltage data is 1.201V the battery voltage is 3.213V

the temperature data is 25 degrees Celsius the reference voltage data is 1.199V the battery voltage is 3.203V

the temperature data is 25 degrees Celsius the reference voltage data is 1.198V the battery voltage is 3.213V



5.8. ADC0_ADC1_Follow_up_mode

5.8.1. DEMO purpose

This demo includes the following functions of GD32 MCU:

- Learn to use the ADC to convert analog signal to digital data
- Learn to use ADC0 and ADC1 follow-up mode

5.8.2. **DEMO** running result

Jump the JP5 to USART with the jumper cap, and then download the program <08_ADC0_ADC1_Follow_up_mode> to the board. Connect serial cable to COM0, open the HyperTerminal. PC5 pin connect to the external voltage input. PC3 is the output voltage of the slide rheostat VR1 on board. Keep PC5 pin should not be reused by other peripherals. JP17 should not be connected.

TIMER1_CH1 is the trigger source of ADC0 and ADC1. When the rising edge of TIMER1_CH1 coming, ADC0 starts immediately and ADC1 starts after a delay of several ADC clock cycles. The values of ADC0 and ADC1 are transmitted to array adc_value[0] and adc_value [1] by DMA.

When sampling the first channel of ADCx (x=0,1), the value of the ADC0 conversion of PC3 pin is stored into the low half word of adc_value [0], and after a delay of several ADC clock cycles the value of the ADC1 conversion of PC5 pin is stored into the high half word of adc_value [0]. When sampling the second channel of ADCx (x=0,1), the value of the ADC0 conversion of PC5 pin is stored into the low half word of adc_value [1], and after a delay of several ADC clock cycles the value of the ADC1 conversion of PC3 pin is stored into the high half word of adc_value [1].

When the program is running, HyperTerminal display the regular value of ADC0 and ADC1 by adc_value [0] and adc_value [1].



```
the data adc_value[0] is OODEOFF3
the data adc_value[1] is OFFFOOA3

the data adc_value[0] is OOE3OFFE
the data adc_value[1] is OFFFOOA4

the data adc_value[0] is OOEAOFF9
the data adc_value[1] is OFF4OOB2

the data adc_value[0] is OODEOFFF
the data adc_value[1] is OFFEOOA9

the data adc_value[1] is OFFEOOA6
```

5.9. ADC0_ADC1_Regular_Parallel_mode

5.9.1. DEMO purpose

This demo includes the following functions of GD32 MCU:

- Learn to use the ADC to convert analog signal to digital data
- Learn to use ADC0 and ADC1 regular parallel mode

5.9.2. DEMO running result

Jump the JP5 to USART with the jumper cap, and then download the program <09_ADC0_ADC1_Regular_Parallel_mode> to the board. Connect serial cable to COM0, open the HyperTerminal. PC5 pin connect to the external voltage input. PC3 is the output voltage of the slide rheostat VR1 on board. Keep PC5 pin should not be reused by other peripherals. JP17 should not be connected.

TIMER1_CH1 is the trigger source of ADC0 and ADC1. When the rising edge of TIMER1_CH1 coming, ADC0 and ADC1 convert the regular channel group parallelly. The values of ADC0 and ADC1 are transmitted to array adc_value[0] and adc_value [1] by DMA.

When sampling the first channel of ADCx (x=0,1), the value of the ADC0 conversion of PC3 pin is stored into the low half word of adc_value [0], the value of the ADC1 conversion of PC5 pin is stored into the high half word of adc_value [0]. When sampling the second channel of ADCx (x=0,1), the value of the ADC0 conversion of PC5 pin is stored into the low half word of adc_value [1], the value of the ADC1 conversion of PC3 pin is stored into the high half word of adc_value [1].



When the program is running, HyperTerminal displays the regular value of ADC0 and ADC1 stored in adc value [0] and adc value [1].

```
the data adc_value[0] is 06210000
the data adc_value[1] is 00000627

the data adc_value[0] is 06290B29
the data adc_value[1] is 0B40061F

the data adc_value[0] is 06250B49
the data adc_value[1] is 0B590629

the data adc_value[0] is 06280B3F
the data adc_value[1] is 0B320628

the data adc_value[1] is 0B320628

the data adc_value[0] is 06230B30
the data adc_value[1] is 0B430622
```

5.10. DAC_Output_Voltage_Value

5.10.1. DEMO purpose

This demo includes the following functions of GD32 MCU:

■ Learn to use DAC to output voltage on DAC0 output

5.10.2. DEMO running result

Download the program <10_DAC_Output_Voltage_Value> to the EVAL board and run, all the LEDs will turn on and turn off for test. The digital value is 0x7FF0, its converted analog voltage should be 1.65V (VREF/2), using the voltmeter to measure PA4 or DAC_OUT0 on JP7, its value is 1.65V. And the signal can be observed through the oscilloscope.

5.11. **I2C_EEPROM**

5.11.1. DEMO purpose

This demo includes the following functions of GD32 MCU:

- Learn to use the master transmitting mode of I2C module;
- Learn to use the master receiving mode of I2C module;
- Learn to read and write the EEPROM with I2C interface.



5.11.2. DEMO running result

Download the program <11_I2C_EEPROM> to the EVAL board and run. Connect serial cable to COM0, jump JP5 to USART, then open the HyperTerminal to show the print message.

Firstly, the data of 256 bytes will be written to the EEPROM from the address 0x00 and printed by the serial port. Then, reading the EEPROM from address 0x00 for 256 bytes and the result will be printed. Finally, compare the data that were written to the EEPROM and the data that were read from the EEPROM. If they are the same, the serial port will output "I2C-AT24C02 test passed!" and the four LEDs lights flashing, otherwise the serial port will output "Err: data read and write aren't matching." And all the four LEDs light.

The output information via the serial port is as following.

```
GD32470I-EVAL I2C-24C02 configured....
The I2CO is hardware interface
The speed is 400000
AT24CO2 writing.
0x00 0x01 0x02 0x03 0x04 0x05 0x06 0x07 0x08 0x09 0x0A 0x0B 0x0C 0x0D 0x0E 0x0F
0x10 0x11 0x12 0x13 0x14 0x15 0x16 0x17 0x18 0x19 0x1A 0x1B 0x1C 0x1D 0x1E 0x1F
0x20 0x21 0x22
               0x23 0x24 0x25
                              0x26 0x27
                                         0x28 0x29 0x2A 0x2B 0x2C
                                                                  0x2D
                                                                       0x2E
0x30 0x31 0x32 0x33 0x34 0x35
                              0x36 0x37 0x38 0x39 0x3A 0x3B 0x3C
                                                                  0x3D 0x3E
0x40 0x41 0x42
               0x43 0x44 0x45
                              0x46 0x47
                                         0x48 0x49 0x4A 0x4B 0x4C
                                                                  0x4D 0x4E
                                                                            0x4F
0x50 0x51 0x52 0x53 0x54 0x55
                              0x56 0x57 0x58 0x59 0x5A 0x5B 0x5C
                                                                  0x5D 0x5E
                                                                            0x5F
l0x60 0x61 0x62
               0x63 0x64 0x65 0x66 0x67
                                         0x68 0x69 0x6A 0x6B 0x6C
                                                                  Ox6D Ox6E
                                                                            0x6F
0x70 0x71
          0x72
               0x73 0x74 0x75
                              0x76
                                   0x77
                                         0x78
                                              0x79 0x7A 0x7B
                                                             0x7C
                                                                  0x7D 0x7E
0x80 0x81 0x82 0x83 0x84 0x85
                              0x86 0x87
                                         0x88 0x89 0x8A 0x8B 0x8C
                                                                  Ox8D Ox8E
0x90 0x91 0x92
               0x93 0x94 0x95
                              0x96 0x97
                                         0x98
                                              0x99 0x9A 0x9B 0x9C
                                                                  Ox9D Ox9E
lowan owat owas
               0xA3 0xA4 0xA5
                              OXA6 OXA7 OXA8 OXA9 OXAA OXAB OXAC
                                                                  OWAD OWAR
                                                                            OxAF
lOxBO OxB1 OxB2
               OxB3 OxB4 OxB5 OxB6 OxB7 OxB8 OxB9 OxBA OxBB OxBC
                                                                  OxBD OxBE
                                                                            OxBF
OxCO OxC1
          0xC2
               0xC3 0xC4 0xC5
                              0xC6 0xC7
                                         0xC8
                                              0xC9 0xCA 0xCB 0xCC
                                                                  OxCD OxCE
OxDO OxD1 OxD2 OxD3 OxD4 OxD5 OxD6 OxD7 OxD8 OxD9 OxDA OxDB OxDC OxDD OxDE
OxEO OxE1 OxE2
               OxE3 OxE4 OxE5 OxE6 OxE7 OxE8 OxE9 OxEA OxEB OxEC
                                                                  OxED OxEE
                                                                            OxEF
OxFO OxF1 OxF2 OxF3 OxF4 OxF5 OxF6 OxF7 OxF8 OxF9 OxFA OxFB OxFC OxFD OxFE OxFE
AT24CO2 reading.
0x00 0x01 0x02 0x03 0x04 0x05 0x06 0x07 0x08 0x09 0x0A 0x0B 0x0C 0x0D 0x0E 0x0F
0x10 0x11 0x12 0x13 0x14 0x15 0x16 0x17
                                         0x18 0x19 0x1A 0x1B 0x1C 0x1D 0x1E 0x1F
               0x23 0x24 0x25
                                         0x28 0x29 0x2A 0x2B 0x2C
0x20 0x21 0x22
                              0x26 \ 0x27
                                                                  0x2D 0x2E
                                                                            0x2F
0x30 0x31 0x32 0x33 0x34 0x35
                              0x36 0x37
                                         0x38 0x39 0x3A 0x3B 0x3C
                                                                  Ox3D Ox3E
                                                                            0x3F
0x40 0x41 0x42
               0x43 0x44 0x45
                              0x46 \ 0x47
                                         0x48 0x49 0x4A 0x4B 0x4C
                                                                  Ox4D Ox4E
                                                                            0x4F
0x50 0x51
          0x52
               0x53 0x54 0x55
                              0x56
                                   0x57
                                         0x58
                                              0x59
                                                   0x5A 0x5B 0x5C
                                                                  0x5D
                                                                       0x5E
0x60 0x61 0x62
               0x63 0x64 0x65
                              0x66 0x67
                                         0x68
                                              0x69 0x6A 0x6B 0x6C
                                                                  Ox6D Ox6E
                                                                            0x6F
0x70 0x71 0x72
               0x73 0x74 0x75
                              0x76 0x77
                                         0x78 0x79 0x7A 0x7B 0x7C
                                                                  0x7D 0x7E
                                                                            0x7F
|0x80 0x81 0x82
               0x83 0x84 0x85
                              0x86 0x87
                                         0x88 0x89 0x8A 0x8B 0x8C
                                                                  Ox8D Ox8E
                                                                            0x8F
0x90 0x91 0x92
               0x93 0x94 0x95
                              0x96 0x97
                                         0x98 0x99 0x9A 0x9B 0x9C
                                                                  Ox9D Ox9E
                                                                            0x9F
               0xA3 0xA4 0xA5
          0xA2
                                         0xA8
OxAO OxA1
                              0xA6
                                   0xA7
                                              OxA9 OxAA OxAB OxAC
                                                                  0xAD
                                                                       0xAE
0xB0 0xB1 0xB2 0xB3 0xB4 0xB5
                              OxB6 OxB7 OxB8 OxB9 OxBA OxBB OxBC
                                                                  OxBD OxBE
                                                                            0xBF
0xC0 0xC1 0xC2 0xC3 0xC4 0xC5
                              0xC6 0xC7
                                         0xC8 0xC9 0xCA 0xCB 0xCC
                                                                  OxCD OxCE
                                                                            OxCF
OxDO OxD1 OxD2 OxD3 OxD4 OxD5 OxD6 OxD7 OxD8 OxD9 OxDA OxDB OxDC
                                                                  OxDD OxDE
                                                                            OxDF
OXEO OXE1 OXE2 OXE3 OXE4 OXE5 OXE6 OXE7 OXE8 OXE9 OXEA OXEB OXEC OXED OXEE
                                                                            OxEF
OxFO OxF1 OxF2 OxF3 OxF4 OxF5 OxF6 OxF7 OxF8 OxF9 OxFA OxFB OxFC OxFD OxFE OxFE
I2C-AT24C02 test passed!
```

5.12. SPI_QSPI_Flash

5.12.1. DEMO purpose

This demo includes the following functions of GD32 MCU:

■ Learn to use the Quad-SPI mode of SPI unit to read and write NOR Flash with the SPI



interface

GD32470I-EVAL-V1.0 board integrates SPI5 module with Quad-SPI mode and the mode can communicate with external NOR Flash devices. The SPI NOR FLASH is a serial FLASH memory chip GD25Q16B which size is 16Mbit, the chip supports standard SPI and quad SPI operation instructions.

5.12.2. DEMO running result

The computer serial port line connected to the COM0 port of development board, set the baud rate of HyperTerminal software to 115200, 8 bits data bit, 1 bit stop bit. At the same time you should jump the JP5 to USART, and jump the JP12, JP13, JP20 to SPI.

Download the program <12_SPI_QSPI_Flash> to the EVAL board, the HyperTerminal software can observe the operation condition and will display the ID of the flash, 256 bytes data which are written to and read from flash. Compare the data that were written to the flash and the data that were read from the flash. If they are the same, the serial port will output "SPI-GD25Q16 Test Passed!", otherwise, the serial port will output "Err: Data Read and Write aren't Matching.". At last, turn on and off the leds one by one. The following is the experimental results.



```
GD32F470I-EVAL System is Starting up...
GD32F470I-EVAL The CPU Unique Device ID: [33394150-4323830-34317A1B]
GD32F470I-EVAL SPI Flash: GD25Q16 configured...
The Flash_ID:0xC84015
Write to tx_buffer:
0x00 0x01 0x02 0x03 0x04 0x05 0x06 0x07 0x08 0x09 0x0A 0x0B 0x0C 0x0D 0x0E 0x0F
0x10 0x11 0x12 0x13 0x14 0x15 0x16 0x17 0x18 0x19 0x1A 0x1B 0x1C 0x1D 0x1E 0x1F
0x20 0x21 0x22 0x23 0x24 0x25 0x26 0x27 0x28 0x29 0x2A 0x2B 0x2C 0x2D 0x2E 0x2F
0x30 0x31 0x32 0x33 0x34 0x35 0x36 0x37 0x38 0x39 0x3A 0x3B 0x3C 0x3D 0x3E 0x3F
0x40 0x41 0x42 0x43 0x44 0x45 0x46 0x47 0x48 0x49 0x4A 0x4B 0x4C 0x4D 0x4E 0x4F
0x50 0x51 0x52 0x53 0x54 0x55 0x56 0x57 0x58 0x59 0x5A 0x5B 0x5C 0x5D 0x5E 0x5E
0x60 0x61 0x62 0x63 0x64 0x65 0x66 0x67 0x68 0x69 0x6A 0x6B 0x6C 0x6D 0x6E 0x6F
0x70 0x71 0x72 0x73 0x74 0x75 0x76 0x77 0x78 0x79 0x7A 0x7B 0x7C 0x7D 0x7E 0x7F
0x80 0x81 0x82 0x83 0x84 0x85 0x86 0x87 0x88 0x89 0x8A 0x8B 0x8C 0x8D 0x8E 0x8F
0x90 0x91 0x92 0x93 0x94 0x95 0x96 0x97 0x98 0x99 0x9A 0x9B 0x9C 0x9D 0x9E 0x9F
OxAO OxA1 OxA2 OxA3 OxA4 OxA5 OxA6 OxA7 OxA8 OxA9 OxAA OxAB OxAC OxAD OxAE OxAF
OxBO OxB1 OxB2 OxB3 OxB4 OxB5 OxB6 OxB7 OxB8 OxB9 OxBA OxBB OxBC OxBD OxBE OxBF
OxCO OxC1 OxC2 OxC3 OxC4 OxC5 OxC6 OxC7 OxC8 OxC9 OxCA OxCB OxCC OxCD OxCE OxCE
OxDO OxD1 OxD2 OxD3 OxD4 OxD5 OxD6 OxD7 OxD8 OxD9 OxDA OxDB OxDC OxDD OxDE OxDE
OMEO OME1 OME2 OME3 OME4 OME5 OME6 OME7 OME8 OME9 OMEA OMEB OMEC OMED OMEE OMEF
OxFO OxF1 OxF2 OxF3 OxF4 OxF5 OxF6 OxF7 OxF8 OxF9 OxFA OxFB OxFC OxFD OxFE OxFE
Read from rx_buffer:
0x00 0x01 0x02 0x03 0x04 0x05 0x06 0x07 0x08 0x09 0x0A 0x0B 0x0C 0x0D 0x0E 0x0F
0x10 0x11 0x12 0x13 0x14 0x15 0x16 0x17 0x18 0x19 0x1A 0x1B 0x1C 0x1D 0x1E 0x1F
0x20 0x21 0x22 0x23 0x24 0x25 0x26 0x27 0x28 0x29 0x2A 0x2B 0x2C 0x2D 0x2E 0x2F
0x30 0x31 0x32 0x33 0x34 0x35 0x36 0x37 0x38 0x39 0x3A 0x3B 0x3C 0x3D 0x3E 0x3F
0x40 0x41 0x42 0x43 0x44 0x45 0x46 0x47 0x48 0x49 0x4A 0x4B 0x4C 0x4D 0x4E 0x4F
0x50 0x51 0x52 0x53 0x54 0x55 0x56 0x57 0x58 0x59 0x5A 0x5B 0x5C 0x5D 0x5E 0x5E
0x60 0x61 0x62 0x63 0x64 0x65 0x66 0x67 0x68 0x69 0x6A 0x6B 0x6C 0x6D 0x6E 0x6F
0x70 0x71 0x72 0x73 0x74 0x75 0x76 0x77 0x78 0x79 0x7A 0x7B 0x7C 0x7D 0x7E 0x7E
0x80 0x81 0x82 0x83 0x84 0x85 0x86 0x87 0x88 0x89 0x8A 0x8B 0x8C 0x8D 0x8E 0x8F
0x90 0x91 0x92 0x93 0x94 0x95 0x96 0x97 0x98 0x99 0x9A 0x9B 0x9C 0x9D 0x9E 0x9F
OxAO OxA1 OxA2 OxA3 OxA4 OxA5 OxA6 OxA7 OxA8 OxA9 OxAA OxAB OxAC OxAD OxAE OxAF
OxBO OxB1 OxB2 OxB3 OxB4 OxB5 OxB6 OxB7 OxB8 OxB9 OxBA OxBB OxBC OxBD OxBE OxBF
OxCO OxC1 OxC2 OxC3 OxC4 OxC5 OxC6 OxC7 OxC8 OxC9 OxCA OxCB OxCC OxCD OxCE OxCF
OxDO OxD1 OxD2 OxD3 OxD4 OxD5 OxD6 OxD7 OxD8 OxD9 OxDA OxDB OxDC OxDD OxDE OxDE
OxEO OxE1 OxE2 OxE3 OxE4 OxE5 OxE6 OxE7 OxE8 OxE9 OxEA OxEB OxEC OxED OxEE OxEF
OxFO OxF1 OxF2 OxF3 OxF4 OxF5 OxF6 OxF7 OxF8 OxF9 OxFA OxFB OxFC OxFD OxFE OxFE
SPI-GD25Q16 Test Passed!
```

5.13. I2S_Audio_Player

5.13.1. DEMO purpose

This Demo includes the following functions of GD32 MCU:

- Learn to use I2S module to output audio file
- Parsing audio files of wav format

GD32470I-EVAL-V1.0 board integrates the I2S(Inter-IC Sound) module, and the module can communicate with external devices using the I2S audio protocol. This Demo mainly shows



how to use the I2S interface of the board for audio output.

5.13.2. DEMO running result

Download the program<13_I2S_Audio_Player>to the EVAL board, jump the JP18 to I2S with the jumper cap, insert the headphone into the audio port, and then listen to the audio file.

5.14. EXMC_SDRAM

5.14.1. DEMO purpose

This demo includes the following function of GD32 MCU:

■ Learn to use EXMC control the SDRAM.

5.14.2. DEMO running result

GD32470I-EVAL board has EXMC module to control SDRAM. Before running the demo, JP17 must be fitted to SDRAM, JP5 must be fitted to USART. Download the program <14_EXMC_SDRAM> to the EVAL board. This demo shows the write and read operation process of SDRAM memory by EXMC module. If the test succeed, LED1 will be turned on. Otherwise, turn on the LED3. Information via a HyperTerminal output as following:



SDRAM initialized! SDRAM write data completed! SDRAM read data completed! Check the data! SDRAM test successed! The data is:															
data i 00 00 00 00 00 00 00 00 00 00 00 00 00	s: 1 123145166178994b6164611123144566778994b6161123344566778994b6161123344566778994b6161123344566778994b616111123344566778994b616111123344566778994b616111123344566778994b616111123344566778994b616111112334456677894666679466666666666666666666666666	22 22 32 45 45 52 45 45 45 45 45 45 45 45 45 45 45 45 45	3132333433637383343363343356373833435637383343563738334356373833435637383343563738334356373833435637383343563738334356373833435637383343563738334356373833435637383343563	44 144 144 144 144 144 144 144 144 144	5 15 2 3 5 4 5 6 5 6 5 6 5 6 5 6 5 6 5 6 5 6 5 6	66 126 36 46 56 66 66 66 66 66 66 66 66 66 66 66 66	77 177 237 477 877 877 877 877 877 877 877 877 87	8 18 28 38 48 58 68 68 68 68 68 68 68 68 68 68 68 68 68	9 19 29 49 59 69 69 69 69 69 69 69 69 69 69 69 69 69	123456789abcdef 123456789abcdef 123456789abcdef 123456789ac	5 1 2 3 4 5 6 6 7 8 9 a b b c d e f b b b b b b b b b b b b b b b b b b	10000000000000000000000000000000000000	123456789 %bcdef 123456789 %bcdef 123456789 %bcdeddddddddddddddddddddddddddddddddddd	123456789abcdef 123456789abcdef 123456789abcdef 123456789ac	ge 68499Gkckr he poge 68489Gkckr he poge 6849Gkckr he poge 68449Gkr he henerhennenden henerhennenden henerhen
cO dO eO fO	c1 d1 e1 f1	c2 d2 e2 £2	c3 d3 e3 f3	c4 d4 e4 f4	c5 d5 e5 f5	c6 d6 e6 f6	c7 d7 e7 £7	c8 d8 e8 f8	c9 d9 e9 f9	ca da ea fa	cb db eb fb	cc dc ec fc	cd dd ed fd	ce de ee fe	cf df ef ff
	M write M writ	M write dat M read data M read data k the data k the data is: 0 1 10 11 200 21 300 31 400 41 500 51 600 61 700 71 800 81 900 91 100 11 200 21 200 21 300 31 400 41 500 51 600 61 700 71 800 81 900 91 100 11 200 21	M write data comp. M read data comp. k the data! 0 1 2 10 11 12 20 21 22 30 31 32 40 41 42 50 51 52 60 61 62 70 71 72 80 81 82 90 91 92 a0 a1 a2 00 a1 b2 c0 c1 c2 d0 d1 d2 e0 e1 e2 10 11 12 20 21 22 30 31 32 40 41 42 50 51 52 60 61 62 70 71 72 80 81 82 90 91 92 a0 a1 a2 b0 b1 b2 c0 c1 c2 d0 d1 d2 e0 e1 e2 f0 f1 f2 10 11 12 20 21 22 30 31 32 40 41 42 50 51 52 60 61 62 70 71 72 80 81 82 90 91 92 a0 a1 a2 b0 b1 b2 c0 c1 c2 d0 d1 d2 e0 e1 e2 f0 f1 f2 f	M write data completed! M read data completed! k the data! M test successed! data is: 0	M write data completed! M read data completed! k the data! M test successed! data is: 0	M write data completed! M read data completed! k the data! M test successed! data is: 0	M write data completed! M read data completed! M the data! M test successed! data is: 0	M write data completed! M read data completed! M the data! M test successed! data is: 0 1 2 3 4 5 6 7 10 11 12 13 14 15 16 17 20 21 22 23 24 25 26 27 30 31 32 33 34 35 56 63 37 40 41 42 43 44 45 46 47 50 51 52 53 54 55 66 67 70 71 72 73 74 75 76 77 80 81 82 83 84 85 86 87 90 91 92 93 94 95 66 67 70 71 72 73 74 65 66 67 70 71 72 73 74 65 66 67 70 71 72 73 74 75 76 77 80 81 82 83 84 85 86 87 10 11 12 13 14 15 6 77 80 81 82 83 84 85 86 87 80 61 62 63 64 65 66 67 70 71 72 73 74 75 76 77 80 81 82 83 84 85 86 87 80 11 82 83 84 85 86 87 80 11 82 83 84 85 86 87 80 11 82 83 84 85 86 87 80 11 82 83 84 85 86 87 80 11 82 83 84 85 86 87 80 11 82 83 84 85 86 87 80 11 82 83 84 85 86 87 80 11 82 83 84 85 86 87 80 11 82 83 84 85 86 87 80 11 82 83 84 85 86 87 80 11 82 83 84 85 86 87 80 11 82 83 84 85 86 87 80 11 82 83 84 85 86 87 80 11 12 13 14 15 6 17 80 11 12 13 14 15 6 77 80 81 82 83 84 85 86 87 80 90 91 92 93 94 95 96 97 80 81 82 83 84 85 86 87 90 91 92 93 94 95 96 97 80 81 82 83 84 85 86 87 90 91 92 93 94 95 96 97 80 81 82 83 84 85 86 87 90 91 92 93 94 95 96 97 80 81 82 83 84 85 86 87 90 91 92 93 94 95 96 97 80 81 82 83 84 85 86 87 90 91 92 93 94 95 96 97 80 81 82 83 84 85 86 87 90 91 92 93 94 95 96 97 80 81 82 83 84 85 86 87 90 91 92 93 94 95 96 97 80 81 82 83 84 85 86 87 90 91 92 93 94 95 96 97 80 81 82 83 84 85 86 87 90 91 92 93 94 95 96 97 80 81 82 83 84 85 86 87 90 91 92 93 94 95 96 97 80 81 82 83 84 85 86 87 90 91 92 93 94 95 96 97 80 81 82 83 84 85 86 87 90 91 92 93 94 95 96 97 80 81 82 83 84 85 86 87 90 91 92 93 94 95 96 97 80 81 82 83 84 85 86 87 90 91 92 93 94 95 96 97 80 81 82 83 84 85 86 87 90 91 92 93 94 95 96 97 80 81 82 83 84 85 86 87 90 91 92 93 94 95 96 97 80 81 82 83 84 85 86 87 90 91 92 93 94 95 96 97 80 81 82 83 84 85 86 87 90 91 92 93 94 95 96 97 80 81 82 83 84 85 86 86 87 90 91 92 93 94 95 96 97 80 81 82 83 84 85 86 87 90 91 92 93 94 95 96 97 80 81 82 83 84 85 86 86 87 90 91 92 93 94 95 96 97 80 81 82 83 84 85 86 86 87 90 91 92 93 94 95 96 97 80 81 82 83 84 85 86 86 87 90 91 92 93 94 95 96 97 80 81 82	M write data completed! M read data completed! W the data! W the data! W data is: 0 1 2 3 4 5 6 7 8 10 11 12 13 14 15 16 17 18 20 21 22 23 24 25 26 27 28 30 31 32 33 34 35 36 37 38 40 41 42 43 44 45 46 47 48 45 46 67 68 87 88 98 91 92 93 94 95 96 97 98 80 81 82 83 84 85 86 87 88 90 91 92 93 94 95 96 97 88 80 81 82 83 84 85 86 87 88 80 80 81 8	M rite data completed! M test successed! data is: 0	M write data completed! M read data completed! W the data: M test successed! data is: 0 1 2 3 4 5 6 7 8 9 a 10 11 12 13 14 15 16 17 18 19 1a 20 21 22 23 24 25 26 27 28 29 2a 30 31 32 33 34 35 36 37 38 39 3a 40 41 42 43 44 45 46 47 48 49 4a 50 51 52 53 54 55 56 57 58 59 5a 60 61 62 63 64 65 66 67 68 69 63 80 81 82 83 84 85 86 87 88 89 8a 40 41 42 43 44 45 46 47 48 49 4a 50 81 82 83 84 85 86 87 88 89 8a 40 41 42 43 44 45 46 47 48 49 4a 50 81 82 83 84 85 86 87 88 89 8a 50 81 82 83 84 85 86 87 88 89 8a 50 81 82 83 84 85 86 87 88 89 8a 60 81 82 83 84 85 86 87 87 88 89 8a 60 81 82 83 84 85 86 87 87 88 89 8a 60 81 82 83 84 85 86 87 87 88 89 8a 60 81 82 83 84 85 86 87 88 89 8a 60 81 82 83 84 85 86 87 87 88 89 8a 60 81 82 83 84 85 86 87 87 88 89 8a 60 81 82 83 84 85 86 87 88 89 8a 60 81 82 83 84 85 86 87 88 89 8a 60 90 91 92 93 94 95 96 97 98 99 9a 60 6	M write data completed! N test successed:	M write data completed! M treat data completed! M theat successed! data is: 1	M write data completed! k the data! Mread data completed! k the data! Matest successed! data is: 1	M write data completed! M treat data completed! k the data! M test successed! data is: 10

5.15. EXMC_SDRAM_DeepSleep

5.15.1. DEMO purpose

This demo includes the following functions of GD32 MCU:

■ Learn to use EXMC control the SDRAM;



Learn to use deepsleep mode.

5.15.2. DEMO running result

GD32470I-EVAL board has EXMC module to control SDRAM. Before running the demo, JP17 must be fitted to SDRAM, JP5 must be fitted to USART. Download the program <15_EXMC_SDRAM_DeepSleep> to the EVAL board. This demo shows how to use SDRAM in the deepsleep mode. Firstly, MCU works in the normal mode, SDRAM auto-refresh cycles are performed by MCU, we write the specified data to the SDRAM. Secondly, we make the MCU to deepsleep mode, at the time, SDRAM auto-refresh cycles are performed by itself and LED2 will light on. Thirdly, press the user key to wake up MCU, compare the data which read from SDRAM with the write data, if the test pass, LED1 will be turned on. Otherwise, turn on the LED3. Information via a HyperTerminal output as following:



SDRAM wr Enter de	EDRAM initialized! EDRAM write data completed! Enter deepsleep mode! Press the user key to wakeup the MCU!														
SDRAM re Check th SDRAM te	ser key has been pressed! DRAM read data completed! heck the data! DRAM test successed! he data is:														
001020040000000000000000000000000000000	1 11 21 31 41 51 61 71 81 81 81 81 81 81 81 81 81 81 81 81 81	2 12 2 3 2 4 2 3 2 4 2 3 2 4 2 3 2 4 2 3 2 4 2 3 2 4 2 3 2 4 2 3 2 4 2 3 2 4 3 2 4 2 3 4 3 4	3 13 23 33 43 53 63 63 63 63 63 63 63 63 63 63 63 63 63	14444444444444444444444444444444444444	55555555555555555555555555555555555555	66666666666666666666666666666666666666	77777777777777777777777777777777777777	8 18 28 38 88 88 88 88 88 88 88 88 88 88 88 88	9 19 23 49 49 49 49 49 49 49 49 49 49 49 49 49	123456789 ab cdef 123456789 ab	123456789 &b cd eff 123456789 &b cd eff 123456789 &b cd eff 123456789 &b cd eff 123456789 &b cd:	123456789 abcdef 123456789 abcdef 123456789 abcdef 123456789 abcdef 123456789 abcdef 123456789	123456789 ab cd ef 123456789 ab cd ef 123456789 ab cd ef 123456789 ab cd ef 123456789 ab cd	123456789 ab cdef	. פאר מא מאלי מא מאלי מא מאלי מאלי מאלי מאלי
e0 £0	el fl	e2 £2	e3 £ 3	e4 f4	e5 £5	e6 £6	e7 £7	e8 £8	e9 £9	ea fa	eb fb	ec fc	ed fd	ee fe	ef ff



5.16. EXMC_NandFlash

5.16.1. DEMO purpose

This demo includes the following functions of GD32 MCU:

Learn to use EXMC control the NAND flash.

5.16.2. DEMO running result

GD32470I-EVAL board has EXMC module to control NAND flash. Before running the demo, JP5 must be fitted to USART. Download the program <16_EXMC_NandFlash> to the EVAL board. This demo shows the write and read operation process of NAND flash memory by EXMC module. If the test pass, LED1 will be turned on. Otherwise, turn on the LED3. Information via a HyperTerminal output as following:

```
NAND flash initialized!
Read NAND ID!
Nand flash ID:0xC8 0xF1 0x80 0x1D
Write data successfully!
Read data successfully!
Check the data!
Access NAND flash successfully!
The data to
               be read:
   10
                           13
                                          15
                                                         17
                                                                         19
           11
                                  14
                                                  16
                                                                 18
                                                                                        1Ъ
                                                                                                        1 d
                                                                                                               1 e
                                                                                                                       1£
                                                                                 1 a
                                                                                                1 c
                                                         27
37
47
                   22
                                  24
                                          25
                                                                                        2Ъ
                                                                                                                       2£
   20
           21
                          23
                                                 26
                                                                 28
                                                                         29
                                                                                                2c
                                                                                                       2d
                                                                                                               2e
                                          35
45
   30
           31
                   32
                           33
                                  34
                                                  36
                                                                 38
                                                                         39
                                                                                 За
                                                                                        ЗЪ
                                                                                                Зс
                                                                                                        34
                                                                                                               3e
                                                                                                                       3£
   40
           41
                   42
                           43
                                  44
                                                  46
                                                                 48
                                                                         49
                                                                                 4a
                                                                                        4Ъ
                                                                                                4 c
                                                                                                        4d
                                                                                                               4e
                                                                                                                       4f
                   52
                                  54
                                          55
                                                 56
                                                         57
67
77
87
                                                                         59
                                                                                        5Ъ
                                                                                                               5e
                                                                                                                       5£
           51
                          53
                                                                 58
                                                                                 5a
                                                                                                5c
                                                                                                       54
                                  64
74
   60
           61
                   62
                          63
                                          65
                                                 66
                                                                 68
                                                                         69
                                                                                ба
                                                                                        6Ъ
                                                                                                6c
                                                                                                       64
                                                                                                               6e
                                                                                                                       6f
                   72
82
                                          75
85
   70
           71
                           73
                                                 76
                                                                 78
                                                                         79
                                                                                 7a
                                                                                        7Ъ
                                                                                                7с
                                                                                                        7d
                                                                                                               7 e
                                                                                                                       7£
           81
                          83
                                  84
                                                 86
                                                                 88
                                                                         89
                                                                                8a
                                                                                        8Ъ
                                                                                                8c
                                                                                                               8e
                                                                                                                       8£
                                                                                                       84
                   92
a2
                                          95
a5
                          93
                                  94
                                                         97
                                                                         99
                                                                                                                       9f
                                                                                 9a
                                                                                        9Ъ
                                                                                                9c
                                                                                                        94
                                                                                                               9e
    aO
                           aЗ
                                  a4
                                                  аб
                                                         a7
                                                                 a8
                                                                         a9
                                                                                                                       af
           a1
                                                                                        ab
                                                                                                        ad
                                                                                 aa
                                                                                                ac
                                                                                                               ae
                   ъ2
c2
                                          15
c5
d5
   ЪΟ
           Ъ1
                           ЪЗ
                                  Ъ4
                                                  Ъ6
                                                         Ъ7
                                                                 Ъ8
                                                                         Ъ9
                                                                                 ba
                                                                                        ЪЪ
                                                                                                        bd
                                                                                                               Ъe
                                                                                                                       Ъf
                                                                                                Ъc
    c0
                           сЗ
                                  c4
                                                  с6
                                                         c7
                                                                 с8
                                                                         с9
                                                                                                                       cf
           c1
                                                                                        cb
                                                                                                        cd
                                                                                 ca
                                                                                                cc
                                                                                                               ce
           d1
                                  d4
                                                         d7
                                                                                                                       df
                                                                                 da
                                                                                                dc
                                                                                                        dd
                                                                                                               de
                                                                                                        ed
                                                                                                                       ef
                                                                                 ea
                                                                                                ec
                                                                                                               ee
```

5.17. SDIO_SDCardTest

5.17.1. DEMO purpose

This demo includes the following functions of GD32 MCU:

- Learn to use SDIO to single block or multiple block write and read
- Learn to use SDIO to erase, lock and unlock a SD card

GD32470i-EVAL-V1.0 board has a secure digital input/output interface (SDIO) which defines the SD/SD I/O /MMC CE-ATA card host interface. This demo will show how to use SDIO to operate on SD card.



5.17.2. DEMO running result

Jump the JP5 to USART to show the print message through HyperTerminal, and jump the JP15 to LED3 to show the execution state of program. Download the program <17_SDIO_SDCardTest> to the EVAL board and run. Connect serial cable to COM0, open the HyperTerminal. Firstly, all the LEDs are turned on and off for test. Then initialize the card and print out the information of the card. After that, test the function of single block operation, lock and unlock operation, erase operation and multiple blocks operation. If any error occurs, print the error message and turn on LED1, LED3 and turn off LED2. Otherwise, turn on all the LEDs.

Uncomment the macro DATA_PRINT to print out the data and display them through HyperTerminal. Set bus mode(1-bit or 4-bit) and data transfer mode(polling mode or DMA mode) by comment and uncomment the related statements.

Information via a serial port output as following.

```
Card init success!
Card information:
## Card version 3.0x ##
## SDHC card ##
## Device size is 7782400KB ##
## Block size is 512B ##
## Block count is 15564800 ##
## CardCommandClasses is: 5b5 ##
## Block operation supported ##
## Erase supported ##
## Lock unlock supported ##
## Application specific supported ##
## Switch function supported ##
Card test:
 Block write success!
 Block read success!
 The card is locked!
 Erase failed!
 The card is unlocked!
 Erase success!
 Block read success!
 Multiple block write success!
 Multiple block read success!
```

5.18. CAN_Network

5.18.1. DEMO purpose

This demo includes the following functions of GD32 MCU:

■ Learn to use the CAN0 communication between two boards

GD32470I-EVAL board integrates CAN (controller area network) bus controller. It is a common industrial control bus. The CAN bus controller follows the 2.0A and 2.0B bus protocols. This routine demonstrates the communication between two boards through



CAN0.

5.18.2. DEMO running result

This example is tested with two GD32F470I-EVAL boards. Jump the JP5 to USART and JP19, JP21 to CAN with the jumper cap. Connect L pin to L pin and H pin to H pin of JP14 on the boards for sending and receiving frames. Download the program <18_CAN_Network> to the two EVAL boards, and connect serial cable to COM0. Firstly, the COM0 sends "please press the Tamper key to transmit data!" to the HyperTerminal. The frames are sent and the transmit data are printed by pressing Tamper Key push button. When the frames are received, the receive data will be printed and the LED2 will toggle one time.

The output information via the serial port is as following.

please press the Tamper key to transmit data!

CANO transmit data: ab,cd

CANO recive data: ab,cd

5.19. RCU_Clock_Out

5.19.1. DEMO purpose

This demo includes the following functions of GD32 MCU:

- Learn to use GPIO control the LED.
- Learn to use the clock output function of RCU.
- Learn to communicate with PC by USART.

5.19.2. DEMO running result

Jump the JP5 to USART with the jumper cap, and download the program <19_RCU_Clock_Out> to the EVAL board and run. Connect serial cable to COM0, open the HyperTerminal. When the program is running, HyperTerminal will display the initial information. Then user can choose the type of the output clock by pressing the TAMPER button. After pressing, the corresponding LED will be turned on and HyperTerminal will display which mode be selected. The frequency of the output clock can be observed through the oscilloscope by PA8 and PC9 pin.

Information via a serial port output as following:



/======== Gigadevice Clock output Demo ========/ press tamper key to select clock output source CK_OUTO: IRC16M, CK_OUT1: system clock/5 CK_OUTO: LXTAL, CK_OUT1: PLLI2SR/5

5.20. CTC_Calibration

5.20.1. DEMO purpose

This demo includes the following functions of GD32 MCU:

- Learn to use external low speed crystal oscillator (LXTAL) to implement the CTC calibration function.
- Learn to use clock trim controller (CTC) to trim internal 48MHz RC oscillator (IRC48M) clock.

The CTC unit trim the frequency of the IRC48M based on an external accurate reference signal source. It can automaticly adjust the trim value to provide a precise IRC48M clock.

5.20.2. DEMO running result

Download the program <20_CTC_Calibration > to the GD32470i-EVAL-V1.0 board and run. The LED1 will turn on if the internal 48MHz RC oscillator (IRC48M) clock trim is OK.

5.21. PMU Sleep Wakeup

5.21.1. DEMO purpose

This demo includes the following functions of GD32 MCU:

■ Learn to use the USART receive interrupt to wake up the PMU from sleep mode

5.21.2. DEMO running result

Download the program < 21_PMU_Sleep_Wakeup > to the EVAL board, jump the JP5 to USART with the jumper cap and connect serial cable to COM0. After power-on, all the LEDs are off. The mcu will enter sleep mode and the software stop running. When the USART0 receives a byte of data from the HyperTerminal, the mcu will wake up from a receive interrupt. And all the LEDs will flash together.



5.22. RTC_Calendar

5.22.1. DEMO purpose

This demo includes the following functions of GD32 MCU:

- Learn to use RTC module to implement calendar function
- Learn to use USART module to implement time display

5.22.2. DEMO running result

Jump the JP5 to USART with the jumper cap, and download the program <22_RTC_Calendar> to the EVAL board and run. Connect serial cable to COM0, open the HyperTerminal. After start-up, the program will ask to set the time on the HyperTerminal. The calendar will be displayed on the HyperTerminal.

5.23. TIMER_Breath_LED

5.23.1. DEMO purpose

This demo includes the following functions of GD32 MCU:

- Learn to use Timer output PWM wave
- Learn to update channel value

5.23.2. DEMO running result

Use the DuPont line to connect the TIMER1_CH2 (PB10) and LED1 (PE2), and then



download the program <23_TIMER_Breath_LED> to the board and run. When the program is running, you can see LED1 lighting from dark to bright gradually and then gradually darken, just like breathing as rhythm.

5.24. TLI_IPA

5.24.1. DEMO purpose

This demo includes the following functions of GD32 MCU:

- Learn to use TLI to control LCD for displaying different images
- Learn to use IPA to process image data

5.24.2. DEMO running result

Jump the JP12, JP15 to LCD, and download the program <24_TLI_IPA> to the EVAL board and run. After downloading program to board, a running cheetah on the background of GD logo is appeared on the LCD, which outputs as following. DC-5V power supply is recommended due to the large current consumption caused by LCD screen.



5.25. DCI_OV2640

5.25.1. DEMO purpose

This demo includes the following functions of GD32 MCU:

- Learn to use DCI interface capture image from OV2640 camera
- Learn to use TLI interface display the captured image



5.25.2. DEMO running result

Connect jumper JP19,JP21,JP22,JP23 to DCI, jumper JP12, JP15 to LCD, jumper JP17 to SDRAM. Download the program<25_DCI_OV2640>to the GD32470i-EVAL-V1.0 board, the correct installation of LCD display and OV2640 camera to the development board. After power on, you can observe the capture image of camera displayed on the LCD screen, you can press the user key to take photo and press tamper key to display photo. You can also return to the camera capture state when press the wakeup key on the development board.



5.26. TRNG_Get_Random

5.26.1. DEMO purpose

This demo includes the following functions of GD32 MCU:

- Learn to use TRNG generate the random number.
- Learn to communicate with PC by USART.



5.26.2. DEMO running result

Jump the JP5 to USART with the jumper cap, and download the program <26_TRNG_Get_Random> to the EVAL board and run. Connect serial cable to COM0, open the serial terminal tool supporting hex format communication. When the program is running, the serial terminal tool will display the initial information. User can use the serial terminal tool to input the minimum and maximum values (for example, the minimum value is 0x00, the maximum value is 0x09), then application will generate random number in the input range and display it by the serial terminal tool.

Information via a serial port output as following:

5.27. ENET

5.27.1. FreeRTOS_tcpudp

DEMO purpose

This demo includes the following functions of GD32 MCU:

- Learn to use Lwip stack.
- Learn to use FreeRTOS operation system.
- Learn to use netconn and socket API to handle with a task.
- Learn how to realize a tcp server.
- Learn how to realize a tcp client.
- Learn how to realize a udp server/client.
- Learn how to use DHCP to allocate ip address automatically.

This demo is based on the GD32470i-EVAL-V1.0 board, it shows how to configure the enet peripherals to send and receive frames in normal mode and use lwip tcp / ip stack to realize ping, telnet and server/client functions.

JP12, JP13, JP17, JP18, JP20, JP22 must be fitted. JP5 jump to Usart.

It is configured in RMII mode, and 25MHz oscillator is used, the system clock is configured to 200MHz.

This demo realizes three applications:

Telnet application, the eval board acts as tcp server. Users can link the client with



- the eval board server, using 8000 port. Users can see the reply from the server, and can send the name(should input enter key) to server.
- tcp client application, the eval board acts as tcp client. Users can link the eval board client with the server, using 10260 port. Users can send information from server to client, then the client will send back the information.
- udp application. Users can link the eval board with another station, using 1025 port. Users can send information from station to board, then the board will send back the information.


If users need dhcp function, it can be configured from the private defines in main.h. This function is closed by default.

Note: Users should configure ip address, mask and gw of GD32470i-EVAL-V1.0 board or served according to the actual net situation from the private defines in main.h.

DEMO running result


Download the program <FreeRTOS_tcpudp> to the EVAL board, LED3 will light every 500ms.

Using Network assistant software, configure the pc side to tcp client, using 8000 port, and when send something through the assistant, users can see the reply from the server:

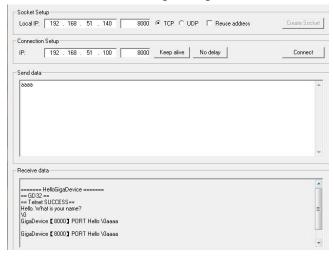


Using Network assistant software, configure the pc side to tcp server, using 10260 port, and when send something through the assistant, users can see the echo reply from the client:



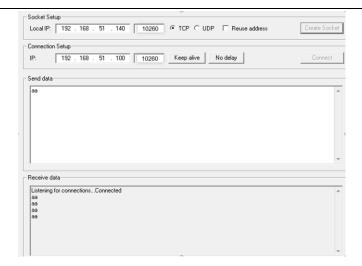

Using Network assistant software, configure to use udp protocol, using 1025 port, and when send something through the assistant, users can see the echo reply from the board:

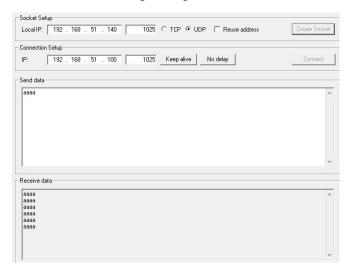

Open the DHCP function in main.h, using a router to connect the board with the pc, users can see the automatic allocated ip address of the board from the HyperTerminal.

5.27.2. Raw_tcpudp

DEMO purpose

This demo includes the following functions of GD32 MCU:

- Learn to use Lwip stack.
- Learn to use raw API to handle with a task.
- Learn how to realize a tcp server.
- Learn how to realize a tcp client.
- Learn how to realize a udp server / client.
- Learn how to use DHCP to allocate ip address automatically.
- Learn to handle with received packet in polling mode and in interrupt mode.



This demo is based on the GD32470i-EVAL-V1.0 board, it shows how to configure the enet peripherals to send and receive frames in normal mode and use lwip tcp / ip stack to realize ping, telnet and server/client functions.

JP12, JP13, JP17, JP18, JP20, JP22 must be fitted. JP5 jump to Usart.

It is configured in RMII mode, and 25MHz oscillator is used, the system clock is configured to 200MHz.

This demo realizes three applications:

- Telnet application, the eval board acts as tcp server. Users can link the client with the eval board server, using 8000 port. Users can see the reply from the server, and can send the name(should input enter key) to server.
- tcp client application, the eval board acts as tcp client. Users can link the eval board client with the server, using 10260 port. Users can send information from server to client, then the client will send back the information. If the server is not online at first, or is break during process, when the server is ready again, users can press tamper key to reconnect with server, and communicate.
- udp application. Users can link the eval board with another station, using 1025 port.
- Users can send information from station to board, then the board will send back the information.

By default, the packet reception is polled in while(1). If users want to receive packet in interrupt service, uncomment the macro defined USE_ENET_INTERRUPT in main.h. If users need dhcp function, it can be configured from the private defines in main.h. This function is closed in default.


Note: Users should configure ip address, mask and gw of GD32470i-EVAL-V1.0 board, or server according to the actual net situation from the private defines in main.h.

DEMO running result


Download the program <Raw tcpudp> to the EVAL board.

Using Network assistant software, configure the pc side to tcp client, using 8000 port, and when send something through the assistant, users can see the reply from the server:




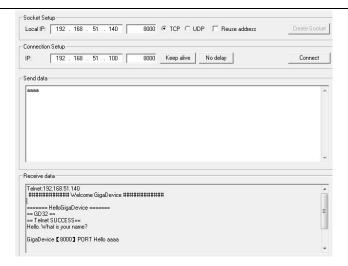

Using Network assistant software, configure the pc side to tcp server, using 10260 port, press the Tamper key, and when send something through the assistant, users can see the echo reply from the client:

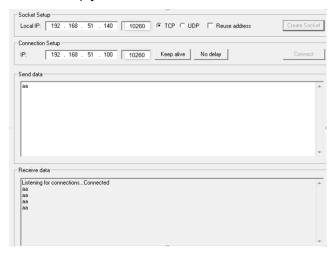

Using Network assistant software, configure to use udp protocol, using 1025 port, and when send something through the assistant, users can see the echo reply from the board:

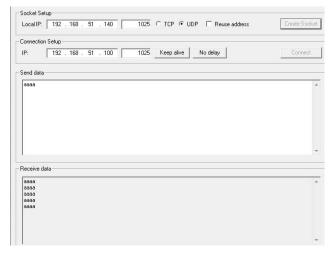



Open the DHCP function in main.h, using a router to connect the board with the pc, users can see the automatic allocated ip address of the board from the HyperTerminal.

5.27.3. Raw_webserver

DEMO purpose

This demo includes the following functions of GD32 MCU:

- Learn to use Lwip stack.
- Learn to use raw API to handle with a task.
- Learn how to realize a web server.
- Learn how to use a web server to control LEDs.
- Learn how to use a web server to monitor the board V_{REFINT} voltage.
- Learn how to use DHCP to allocate ip address automatically.
- Learn to handle with received packet in polling mode and in interrupt mode.

This demo is based on the GD32470i-EVAL-V1.0 board, it shows how to configure the enet peripherals to send and receive frames in normal mode and use lwip tcp / ip stack to realize webserver application.

JP12, JP13, JP17, JP18, JP20, JP22 must be fitted. JP5 jump to Usart.

It is configured in RMII mode, and 25MHz oscillator is used, the system clock is configured to 200MHz.

This demo realizes webserver application:

Users can visit the eval board through Internet Explorer, the eval board acts as a webserver, and the url is the local ip address of the eval board. There are two experiments realized, one is the LEDs control, the other one is the ADC monitoring V_{REFINT} voltage in real-time.

If users need dhcp function, it can be configured from the private defines in main.h. This function is closed by default. Users can use a router to connect the eval board, and use the COM port to print the automatic allocated ip address, then connect your mobile phone to the wifi which the router send. Users can visit the eval board and control it on your mobile phone.

By default, the packet reception is polled in while(1). If users want to receive packet in interrupt service, uncomment the macro define USE_ENET_INTERRUPT in main.h.

Note: Users should configure ip address, mask and gw of GD32470i-EVAL-V1.0 board according to the actual net situation from the private defines in main.h.


DEMO running result

Download the program <Raw_webserver> to the EVAL board, using Internet Explorer software, enter in the ip address of the board, click on the LED control linker, choose the




LED checkboxes users want to light, and "send", the corresponding LEDs will light. Click on the ADC monitor linker, the real-time V_{REFINT} voltage is showed on the webpage, and the data refreshes every second automatically.

The web home page shows as below:

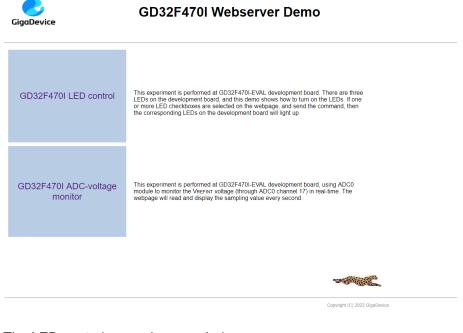


The LED control page shows as below:

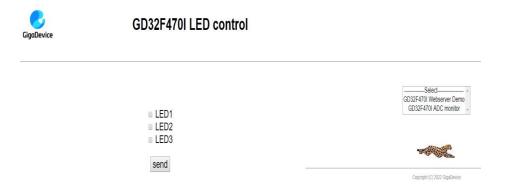

The ADC monitor page shows as below:



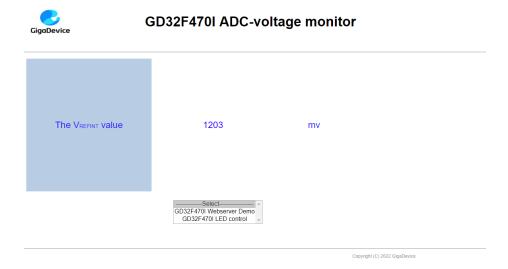

Open the DHCP function in main.h, using a router to connect the board, and use the HyperTerminal to print the automatic allocated ip address, then connect your mobile phone to the wifi which the router send. Users can visit the eval board and control it on your mobile phone.

5.28. USB_Device

5.28.1. HID_Keyboard


DEMO Purpose

This demo includes the following functions of GD32 MCU:

- Learn how to use the USBFS/USBHS peripheral mode
- Learn how to implement USB HID (human interface) device

GD32F470I-EVAL board has four keys, one USB_FS interface and one USB_HS interface. The four keys are Reset key, Wakeup key, User key and Tamper key. In this demo, the GD32F470I-EVAL board is enumerated as an USB Keyboard, which uses the native PC Host HID driver, as shown below. The USB Keyboard uses three keys (wakeup key, tamper key and user key) to output three characters ('b', 'a' and 'c'). In addition, the demo also supports remote wakeup which is the ability of a USB device to bring a suspended bus back to the active condition, and the wakeup key is used as the remote wakeup source.



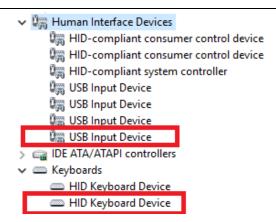

DEMO Running Result

According to the VBUSIG bit in USBFS_GCCFG register, user can decide whether or not to jump JP5 to USB_FS. After doing this, download the program <28_USB_Device\HID_Keyboard> to the EVAL board and run. If you press the Wakeup key, will output 'b'. If you press the User key, will output 'c'. If you press the Tamper key, will output 'a'.

If you want to test USB remote wakeup function, you can do as follows:

- Manually switch PC to standby mode
- Wait for PC to fully enter the standby mode
- Push the Wakeup key
- If PC is ON, remote wakeup is OK, else failed.

5.28.2. MSC_Udisk

DEMO Purpose

This demo includes the following functions of GD32 MCU:

- Learn how to use the USBFS/USBHS peripheral mode
- Learn how to implement USB MSC(mass storage) device

This demo mainly implements a U disk. U disk is currently very widely used removable MSC devices. MSC, the Mass Storage device Class, is a transport protocol between a computer and mobile devices, which allow a universal serial bus (USB) equipment to access a host computing device, file transfer between them, mainly including mobile hard disk, mobile U disk drive, etc... The MSC device must have a storage medium, and this Demo uses the MCU's internal SRAM as the storage medium. For more details of the MSC protocol please refer to the MSC protocol standard.


MSC device will use a variety of transport protocols and command formats for communication, so it need to choose the appropriate protocol and command format in the realization of the application. This Demo selects the BOT (bulk only transport) protocol and the required SCSI (small computer interface) command, and is compatible



with a wide variety of Window operating systems. Specific BOT protocol and SCSI command specification please refer to the standard of their agreement.

DEMO Running Result

According to the VBUSIG bit in USBFS_GCCFG register, user can decide whether or not to jump JP5 to USB_FS if user use USBFS core. After doing this, download the program <28_USB_Device\MSC_Udisk> to the EVAL board and run. When the EVAL board connect to the PC, you will find a USB large capacity storage device is in the universal serial bus controller, and there is 1 more disk drives in the equipment manager of PC, as shown below:

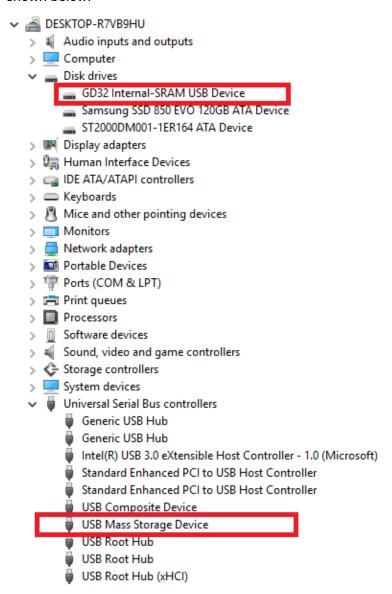

Then, after opening the resource manager, you will see more of the 1 disk, as shown in the following diagram:





At this point, the write/read/formatting operation can be performed as the other mobile devices.

5.29. USB_Host

5.29.1. **HID_Host**

DEMO Purpose

This demo includes the following functions of GD32 MCU:

- Learn to use the USBFS/USBHS as a HID host
- Learn the operation between the HID host and the mouse device
- Learn the operation between the HID host and the keyboard device

GD32F470I-EVAL board integrates the USBFS and USBHS module, and the module can be used as USB device, USB host or OTG device. This demo mainly shows how to use the USBFS/USBHS as a USB HID host to communicate with external USB HID device.

DEMO Running Result

Jump the JP5 to USB_FS and jump the JP17 to SDRAM. Insert the OTG cable to USB port. Then, download the program <29_USB_Host\HID_Host> to the EVAL board and run.

If a mouse has been attached, the user will see the information of mouse enumeration.



```
##### USB Host library started ###
> Device Attached.
> Reset the USB device.
> Low speed device detected.
VID: 046Dh
PID: C077h
> HID device connected.
Manufacturer: Logitech
Product: USB Optical Mouse
Serial Number: N/A
> Enumeration completed.
To start the HID class operations:
Press User Key...
```

First pressing the user key will see the inserted device is mouse, and then moving the mouse will move the 'x' in the LCD screen and pressing the button will show the magenta color rectangle in the LCD screen.






If a keyboard has been attached, the user will see the information of keyboard enumeration.

```
> Device Attached.
> Reset the USB device.
> Low speed device detected.
VID: 413Ch
PID: 2003h
> HID device connected.
Manufacturer: Dell
Product: Dell USB Keyboard
Serial Number: N/A
> Enumeration completed.
To start the HID class operations:
Press User Key...
```

First pressing the user key will see the inserted device is keyboard, and then pressing the keyboard will print the char of the button in the LCD screen.

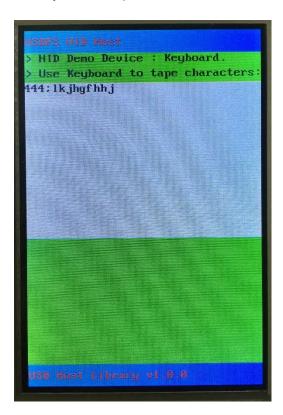



5.29.2. MSC_Host

DEMO Purpose

This demo includes the following functions of GD32 MCU:


- Learn to use the USBFS/USBHS as a MSC host
- Learn the operation between the MSC host and the Udisk

GD32F470I-EVAL board integrates the USBFS and USBHS module, and the modules can be used as USB device, USB host or OTG device. This demo mainly shows how to use the USBFS or the USBHS as a USB MSC host to communicate with external Udisk.

DEMO Running Result

Jump the JP5 to USB_FS and jump the JP17 to SDRAM. Insert the OTG cable to USB port. Then, download the program <29_USB_Host\HID_Host> to the EVAL board and run.

If an Udisk has been attached, the user will see the information of Udisk enumeration.

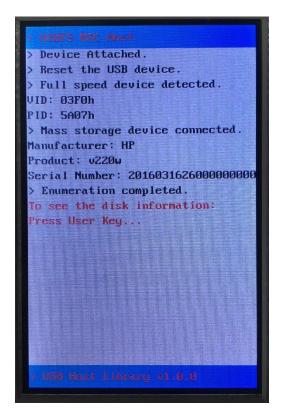

First pressing the user key will see the Udisk information, next pressing the tamper key will see the root content of the Udisk, then press the wakeup key will write file to the Udisk, finally the user will see information that the msc host demo is end.





6. Revision history

Table 6-1 Revision history

Revision No.	Description	Date
2.0	Initial Release	April.18, 2022



Important Notice

This document is the property of GigaDevice Semiconductor Inc. and its subsidiaries (the "Company"). This document, including any product of the Company described in this document (the "Product"), is owned by the Company under the intellectual property laws and treaties of the People's Republic of China and other jurisdictions worldwide. The Company reserves all rights under such laws and treaties and does not grant any license under its patents, copyrights, trademarks, or other intellectual property rights. The names and brands of third party referred thereto (if any) are the property of their respective owner and referred to for identification purposes only.

The Company makes no warranty of any kind, express or implied, with regard to this document or any Product, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. The Company does not assume any liability arising out of the application or use of any Product described in this document. Any information provided in this document is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Except for customized products which has been expressly identified in the applicable agreement, the Products are designed, developed, and/or manufactured for ordinary business, industrial, personal, and/or household applications only. The Products are not designed, intended, or authorized for use as components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, atomic energy control instruments, combustion control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or Product could cause personal injury, death, property or environmental damage ("Unintended Uses"). Customers shall take any and all actions to ensure using and selling the Products in accordance with the applicable laws and regulations. The Company is not liable, in whole or in part, and customers shall and hereby do release the Company as well as it's suppliers and/or distributors from any claim, damage, or other liability arising from or related to all Unintended Uses of the Products. Customers shall indemnify and hold the Company as well as it's suppliers and/or distributors harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of the Products.

Information in this document is provided solely in connection with the Products. The Company reserves the right to make changes, corrections, modifications or improvements to this document and Products and services described herein at any time, without notice.