


ESP8266 (NodeMCU) Smart Home Wiring Diagram

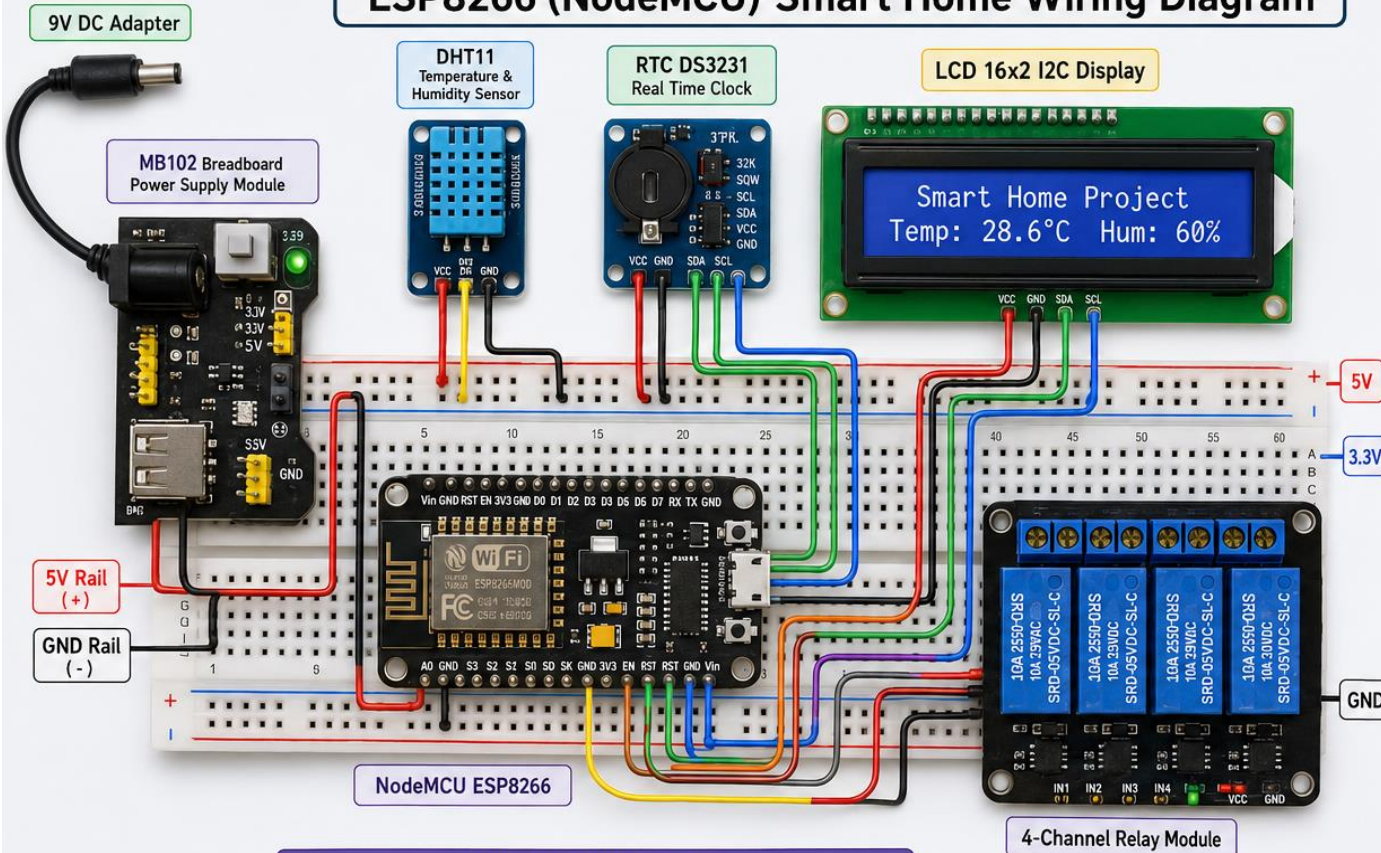

NodeMCU ESP8266

NODEMCU PINOUT (Easy Reference)

D5 (GPIO14)	D2 (GPIO4)	D1 (GPIO5)	D6 (GPIO12)	D7 (GPIO13)	D0 (GPIO16)	D8 (GPIO15)
----------------	---------------	---------------	----------------	----------------	----------------	----------------

NOTES:

- All GND connections must be common.
- Power the board using 5V on VIN (from power module).
- DHT11 and RTC are powered by 3.3V.
- Relay module is powered by 5V.

CONNECTION SUMMARY

Component	Pin	NodeMCU Pin
DHT11	VCC	3.3V
	GND	GND
	DATA	D5 (GPIO14)
RTC DS3231	VCC	3.3V
	GND	GND
	SDA	D2 (GPIO4)
	SCL	D1 (GPIO5)
LCD 16x2 I2C	VCC	5V
	GND	GND
	SDA	D2 (GPIO4)
	SCL	D1 (GPIO5)
4-CH RELAY	VCC	5V
	GND	GND
	IN1	D6 (GPIO12)
	IN2	D7 (GPIO13)
	IN3	D0 (GPIO16)
	IN4	D8 (GPIO15)

WIRE COLOR GUIDE

Red	= 5V
Blue	= 3.3V
Black	= GND
Green	= SDA (Data)
Blue	= SCL (Clock)
Yellow	= DHT11 Data
Orange	= Relay IN1 (D6)
Brown	= Relay IN2 (D7)
Purple	= Relay IN3 (D0)
Gray	= Relay IN4 (D8)