

BEE 4750 Homework 3: Dissolved Oxygen and Monte Carlo

Name:

ID:

Due Date

Thursday, 10/16/25, 9:00pm

Overview

Instructions

- Problem 1 asks you to implement a model for dissolved oxygen in a river with multiple waste releases and use this to develop a strategy to ensure regulatory compliance.

Load Environment

The following code loads the environment and makes sure all needed packages are installed. This should be at the start of most Julia scripts.

```
import Pkg
Pkg.activate(@__DIR__)
Pkg.instantiate()
```

```
Activating project at `c:\Users\adric\OneDrive - Cornell University\Documents\3. Env Sys A
Installed PrettyTables v3.0.11
Precompiling project...
44185.0 ms    PrettyTables
46991.8 ms    DataFrames
```

3146.0 ms Latexify → DataFramesExt
3 dependencies successfully precompiled in 130 seconds. 211 already precompiled.

```
using Random
using Plots
using LaTeXStrings
using Distributions
```

Problems (Total: 30 Points)

Problem 1 (30 points)

A river which flows at 6 km/d is receiving waste discharges from two sources which are 15 km apart. The oxygen reaeration rate is 0.55 day⁻¹, and the decay rates of CBOD and NBOD are 0.35 and 0.25 day⁻¹, respectively. The river's saturated dissolved oxygen concentration is 10 mg/L.

If the characteristics of the river inflow and waste discharges are given in Table 1, write a Julia model to compute the dissolved oxygen concentration from the first wastewater discharge to an arbitrary distance d km downstream. Use your model to compute the minimum dissolved oxygen concentration up to 50 km downstream and how far downriver this maximum occurs.

Parameter	River Inflow	Waste Stream 1	Waste Stream 2
Inflow	100,000 m ³ /d	10,000 m ³ /d	15,000 m ³ /d
DO Concentration	7.5 mg/L	5 mg/L	5 mg/L
CBOD	5 mg/L	50 mg/L	45 mg/L
NBOD	5 mg/L	35 mg/L	35 mg/L

Table 1: River inflow and waste stream characteristics for Problem 1.

Problem 1.1

Implement the Streeter-Phelps (analytic) solution for the dissolved oxygen concentration. Plot the dissolved oxygen concentration from the first waste stream to 50 km downriver. What is the minimum value in mg/L?

```

function Mix(q1, c1, q2, c2)
    #Function returns concentration of stream after mixing
    return (q1*c1 + q2*c2)/(q1+q2)
end

function alpha1(ka, x, u)
    return exp(-ka*x/u)
end

function alpha2(ka, kc, x, u)
    return (kc/(ka - kc))*(exp(-kc*x/u) - exp(-ka*x/u))
end

function alpha3(ka, kn, x, u)
    return (kn/(ka - kn))*(exp(-kn*x/u) - exp(-ka*x/u))
end

```

alpha3 (generic function with 1 method)

```

#Setting variables:
u = 6000 #m/d

ka = 0.55 #/day
kc = 0.35 #/day
kn = 0.25 #/day

cs = 10 #mg DO/L

#Spatial setup
x = collect(range(0, 50000, 501))

#First discharge mixing results:
#DO
DO_1 = Mix(100_000, 7.5, 10_000, 5);
CBOD_1 = Mix(100_000, 5, 10_000, 50);
NBOD_1 = Mix(100_000, 5, 10_000, 35);

DO = zeros(501)
DO[1] = DO_1

qnew = 100_000 + 10_000

```

```

#Stream feeding into second discharge:
for i in 1:151
    a1 = alpha1(ka, x[i], u)
    a2 = alpha2(ka, kc, x[i], u)
    a3 = alpha3(ka, kn, x[i], u)
    DO[i] = cs*(1-a1) + DO[1]*a1 - CBOD_1*a2 - NBOD_1*a3
end


CBOD_end1 = CBOD_1*exp(-kc*15000/u)
NBOD_end1 = NBOD_1*exp(-kn*15000/u)

#Second discharge mixing results:
DO_2 = Mix(qnew, DO[151], 15_000, 5)
DO[151] = DO_2
CBOD_2 = Mix(qnew, CBOD_end1, 15_000, 45)
NBOD_2 = Mix(qnew, NBOD_end1, 15_000, 35)

for i in 151:501
    dist = x[i] - x[151]
    a1 = alpha1(ka, dist, u)
    a2 = alpha2(ka, kc, dist, u)
    a3 = alpha3(ka, kn, dist, u)
    DO[i] = cs*(1-a1) + DO[151]*a1 - CBOD_2*a2 - NBOD_2*a3
end

p1 = plot(x, DO, title="DO Curve", xlabel="Distance (km)", ylabel="DO Concentration (mg DO/L)",
display(p1)

```

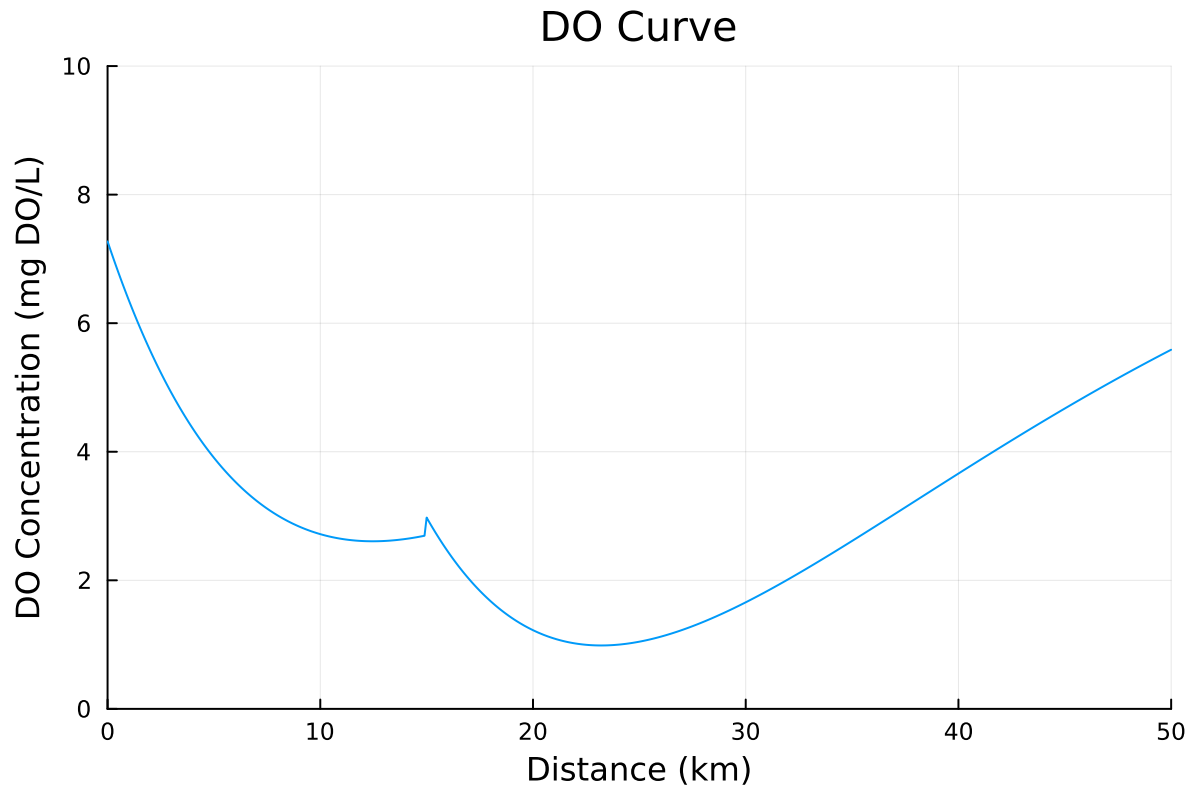

Problem 1.2

Implement a numerically-integrated (discretized) solution for the dissolved oxygen concentration. Using a resolution of 0.5km, conduct a simulation and plot the results on the same axis as the plot from Problem 1.1. How has the minimum value changed? What do you attribute this difference to (be specific about the source of the difference(s) in terms of the simulation dynamics, not just that one is a numerical approximation).

```
delta = 500 #m
x2 = collect(range(0, 50_000, 101));
DO2 = zeros(101);
CBOD2 = zeros(101);
NBOD2 = zeros(101);

#Initial mixing same
DO2[1] = DO_1;
CBOD2[1] = CBOD_1;
```

```
NBOD2[1] = NBOD_1;
```

Problem 1.3

Using the analytic model, what is the minimum level of treatment (% removal of organic waste; assume this is equivalent to the same level of reduction of the CBOD and NBOD) for waste stream 1 that will ensure that the dissolved oxygen concentration is in compliance with the 4 mg/L standard along with a 5% margin of safety, assuming that waste stream 2 remains untreated? How about if only waste stream 2 is treated?

Problem 1.4

Suppose you are responsible for designing a waste treatment plan for discharges into the river, with a regulatory mandate to keep the dissolved oxygen concentration above 4 mg/L. Discuss whether you'd opt to treat waste stream 2 alone or both waste streams equally. What other information might you need to make a conclusion, if any?

Problem 1.5

Suppose that it is known that the DO concentrations at the river inflow can vary according to a LogNormal(2.0, 0.15) distribution. Conduct a Monte Carlo simulation of the DO concentration in the river. If you treat only waste stream 1 (based on your analysis from Problem 1.3), what is the expected probability and 95% confidence interval that the river fails to comply with the regulatory standard of 4 mg/L? How did you decide that your Monte Carlo sample size was sufficiently large?

References

List any external references consulted, including classmates.