Power & USB

File: power_usb.kicad_sch

ESP32

File: mcu.kicad_sch

H1
M3

H2
M3

H3
M3

H4
M3

HV supply

File: hv_supply.kicad_sch

Display

File: display.kicad_sch

electroNIX–USB: USB–C powered ESP32 nixie clock, 4 x Z573M
(one generator, 4– or 6–tube build: python3 source/gen.py OUTDIR ––tubes 6)

Electrical design follows TESTA–QUADRA electroNIXclock 3 (PCB–036, 2013),
the micro–USB powered board: 5 V boost + 7–diode multiplier to 170 V,
MMBTA42/MMBTA92 discrete tube drivers, neon colon, light sensor.

Changes from PCB–036:
- ATmega16 replaced by ESP32–WROOM–32E; runs stock firmware unchanged
  (4 tubes: BOARD_ELECTRONIX_3, 6 tubes: BOARD_ELECTRONIX_4_6T)
- USB–C (5k1 sink) + polyfuse + TVS + USBLC6, CH340C for programming
- no buzzer, no RTC crystal / supercap: time from NTP
- HV feedback clamp to 3V3, base resistors resized for 3.3 V drive
- two independent colon neons (SEC_0, SEC_1)

Licensed with the repository; see LICENSE

ESP32 rework of TESTA–QUADRA electroNIXclock 3 (PCB–036), USB powered

**electroNIX–USB (Z573M)**


Sheet: /

File: electroNIX–USB.kicad_sch

***Title: electroNIX–USB (Z573M, 4 tubes) – overview***


| | | |
|---|---|---|
| Size: A3 | Date: 2026–10–15 | **Rev: 0.1** |
| KiCad E.D.A. kicad–cli 7.0.11+dfsg–1build4 | | Id: 1/5 |

## USB-C input (5 V only, sink: 5k1 on CC1/CC2)

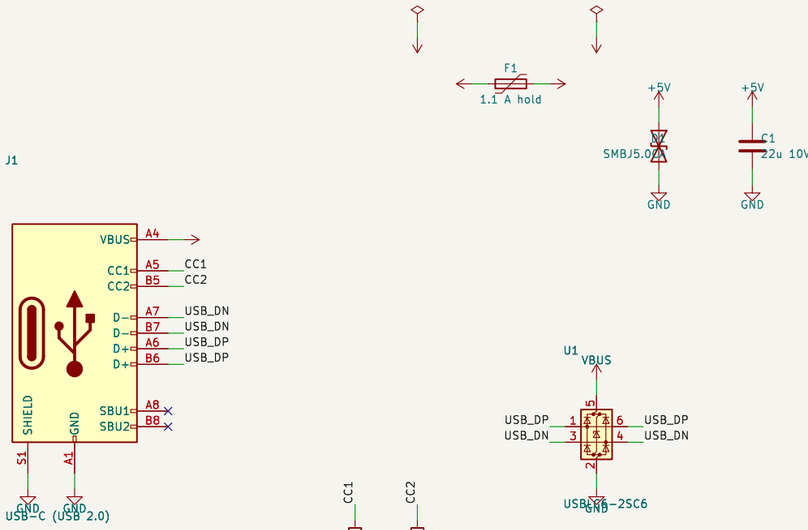



VBUS feeds the boost converter and the 3.3 V LDO only.
Budget from a 500 mA port: ESP32 ~250 mA avg (500 mA WiFi peaks),
HV supply ~150 mA (multiplexed: same for 4 or 6 tubes). A USB-C source gives 1.5–3 A at 5V.

## 3.3 V regulator

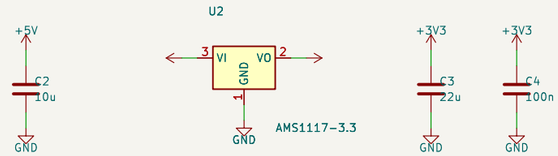


## USB–UART (programming + serial log)

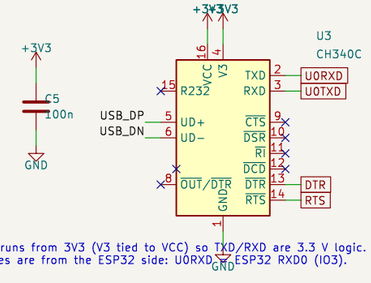


CH340C runs from 3V3 (V3 tied to VCC) so TXD/RXD are 3.3 V logic.
Net names are from the ESP32 side: U0RXD = ESP32 RXD0 (IO3).


Licensed with the repository; see LICENSE
ESP32 rework of TESTA-QUADRA electroNIXclock 3 (PCB-036), USB powered
**electroNIX-USB (Z573M)**


Sheet: /Power & USB/
File: power_usb.kicad_sch

***Title: electroNIX-USB – USB-C power, 3.3 V, USB-UART***

| Size: A3 | Date: 2026-10-15 | **Rev: 0.1** |
|---|---|---|
| KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4 | | Id: 2/5 |


## ESP32 module (GPIO map = stock firmware BOARD_ELECTRONIX_3)



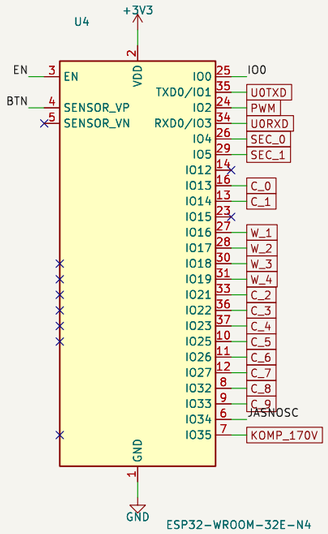

Strapping pins at reset:
- IO0 high = run (10k pull-up; BOOT / auto-reset pull it low). Firmware drives IO0 as its (unfitted) buzzer pin after boot — harmless.
- IO2 low/float (boost gate pull-down on HV sheet)
- IO12 / IO15 open: internal pull-down / pull-up give the right defaults. Reserved for anodes W_5 / W_6 on the 6-tube build.
- IO5 SEC_1 neon driver base — default state is harmless

## Reset, boot and auto-program (DTR/RTS)




| DTR | RTS | EN | IO0 |
|---|---|---|---|
| 1 | 1 | 1 | 1 |
| 0 | 0 | 1 | 1 |
| 1 | 0 | 0 | 1 |
| 0 | 1 | 1 | 0 |

## Peripherals

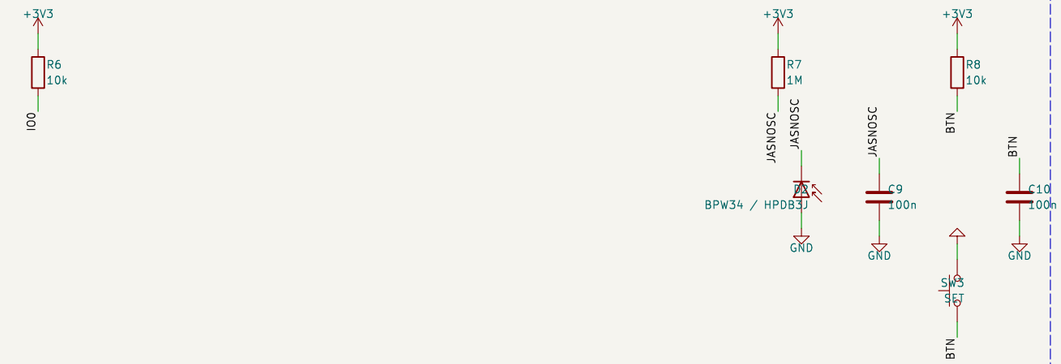


No buzzer and no RTC: time comes from NTP (firmware BOARD_HAS_RTC 0).
IO0 has a 10k pull-up so it boots normally.

Licensed with the repository; see LICENSE


ESP32 rework of TESTA-QUADRA electroNIXclock 3 (PCB-036), USB powered
**electroNIX-USB (Z573M)**

Sheet: /ESP32/
File: mcu.kicad_sch

***Title: electroNIX-USB – ESP32-WROOM-32E and peripherals***


| Size: A3 | Date: 2026-10-15 | **Rev: 0.1** |
|---|---|---|
| KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4 | | Id: 3/5 |

## Boost switch (as PCB-036)

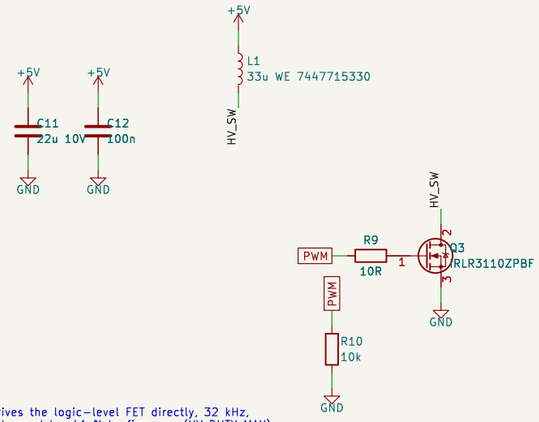



IO2 drives the logic-level FET directly, 32 kHz, duty clamped to ~41 % by firmware (HV_DUTY_MAX). 10k keeps the gate (and IO2) low during boot.

## Cockcroft-Walton multiplier, 7 x 10MQ100N, 7 x 1u/100V (as PCB-036)

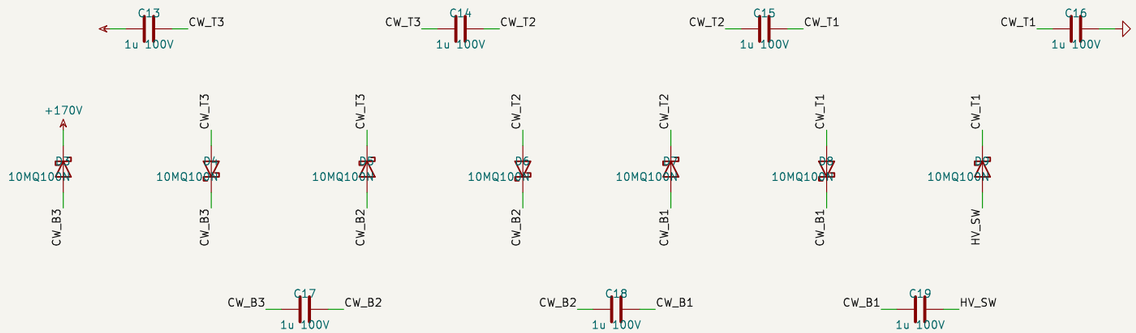


Each stage adds one boost peak (~45 V at 170 V out); no part sees more than ~100 V.

## Output, feedback (KOMP_170V) and ADC clamp

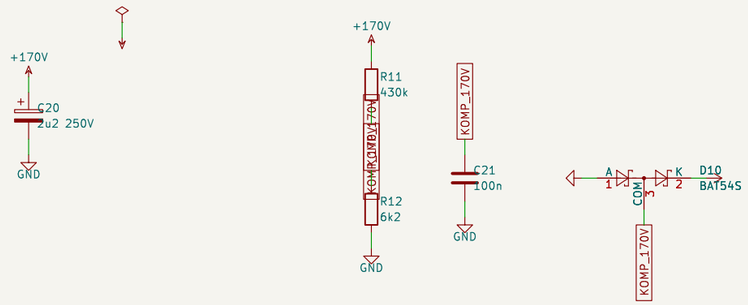


Divider ratio (430k+6k2)/6k2 = 70.35 = HV_DIV_RATIO in display_testa.cpp.
170 V -> 2.42 V at IO35. BAT54S clamps to 3V3 (the original clamped to 5 V).
Use 1 % parts; 430k in 1206 for working voltage.

Licensed with the repository; see LICENSE

ESP32 rework of TESTA-QUADRA electroNIXclock 3 (PCB-036), USB powered


**electroNIX-USB (Z573M)**

Sheet: /HV supply/
File: hv_supply.kicad_sch

***Title: electroNIX-USB – 170 V supply (boost + multiplier)***


| | | |
|---|---|---|
| Size: A3 | Date: 2026-10-15 | **Rev: 0.1** |
| KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4 | | Id: 4/5 |

## Anode switches (one per tube, MMBTA42 level shift + MMBTA92 high side)

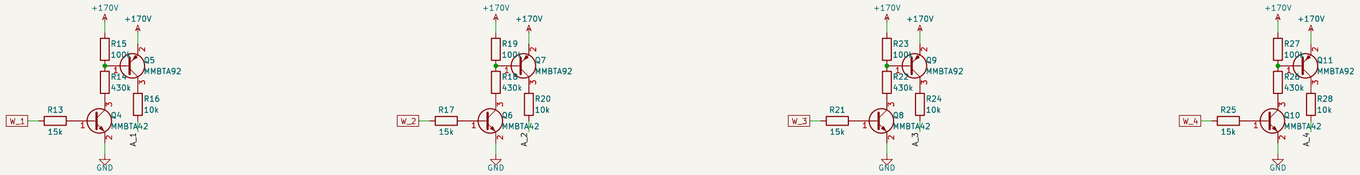



W_n high -> tube n anode at +170V through 10k. Anode current ~2 mA peak. 6-tube build (--tubes 6): two more of these on IO12/IO15.

## Tubes (RFT Z573M, B13D base, pin 7 at front)

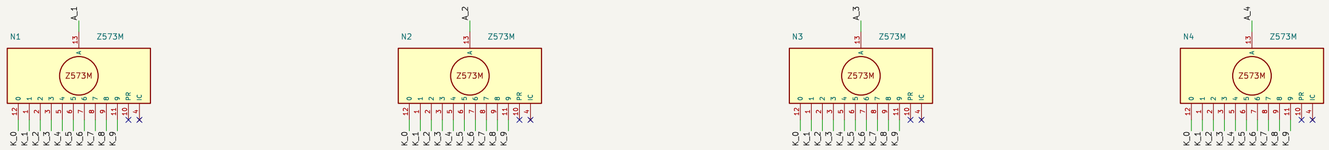


Pin 4 = internal connection (leave open). Pin 10 = PR sign (unused).
Pinout from tube-tester.com Z573M page: check against a real tube before layout.

## Cathode switches (MMBTA42, shared by all tubes)





## Colon neons (SEC_0 upper / SEC_1 lower)




Original Z573M kit fits one neon (SEC_0). Fit the second for a two-dot colon;
Firmware drives SEC_0/SEC_1 independently. 150k per neon: ~0.6 mA at 170 V.

## Off-cathode clamp (anti-ghosting, as PCB-036)




KBIAS = 170 V x 100k/530k = -32 V. Off cathodes are held at or below it,
so the lit anode cannot glow them and the MMBTA42s stay well under VCEO.

Licensed with the repository: see LICENSE

ESP32 rework of TESTA-QUADRA electroNIXclock 3 (PCB-036), USB powered
**electroNIX-USB (Z573M)**

Sheet: /Display/
File: display.kicad_sch

***Title: electroNIX-USB – 4 x Z573M, multiplexed***

| Size: A2 | Date: 2026-10-15 | **Rev: 0.1** |
|---|---|---|
| KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4 | | Id: 5/5 |