

BEE 4750 Homework 3: Dissolved Oxygen and Monte Carlo

Name: Evan Wu

ID: 5839048

Due Date

Thursday, 10/16/25, 9:00pm

Overview

Instructions

- Problem 1 asks you to implement a model for dissolved oxygen in a river with multiple waste releases and use this to develop a strategy to ensure regulatory compliance.

Load Environment

The following code loads the environment and makes sure all needed packages are installed. This should be at the start of most Julia scripts.

```
import Pkg
Pkg.activate(@__DIR__)
Pkg.instantiate()
```

```
Activating project at `c:\Users\evan\Documents\GitHub\hw3-evtw`
Precompiling project...
 37736.0 ms   DataFrames
  2507.8 ms   Latexify → DataFramesExt
 2 dependencies successfully precompiled in 48 seconds. 212 already precompiled.
```

```
using Random
using Plots
using LaTeXStrings
using Distributions
```

Problems (Total: 30 Points)

Problem 1 (30 points)

A river which flows at 6 km/d is receiving waste discharges from two sources which are 15 km apart. The oxygen reaeration rate is 0.55 day⁻¹, and the decay rates of CBOD and NBOD are 0.35 and 0.25 day⁻¹, respectively. The river's saturated dissolved oxygen concentration is 10 mg/L.

If the characteristics of the river inflow and waste discharges are given in Table 1, write a Julia model to compute the dissolved oxygen concentration from the first wastewater discharge to an arbitrary distance d km downstream. Use your model to compute the minimum dissolved oxygen concentration up to 50 km downstream and how far downriver this maximum occurs.

Parameter	River Inflow	Waste Stream 1	Waste Stream 2
Inflow	100,000 m ³ /d	10,000 m ³ /d	15,000 m ³ /d
DO Concentration	7.5 mg/L	5 mg/L	5 mg/L
CBOD	5 mg/L	50 mg/L	45 mg/L
NBOD	5 mg/L	35 mg/L	35 mg/L

Table 1: River inflow and waste stream characteristics for Problem 1.

Problem 1.1

Implement the Streeter-Phelps (analytic) solution for the dissolved oxygen concentration. Plot the dissolved oxygen concentration from the first waste stream to 50 km downriver. What is the minimum value in mg/L?

Streeter-Phelps solution:

$$U \frac{dC}{dx} = k_a(C_s - C) + P - R - S_B - k_c B_0 \exp\left(\frac{-k_c x}{U}\right) - k_n N_0 \exp\left(\frac{-k_n x}{U}\right)$$

In this model, we ignore P, R, S_B .

$$U \frac{dC}{dx} = k_a(C_s - C) - k_c B_0 \exp\left(\frac{-k_c x}{U}\right) - k_n N_0 \exp\left(\frac{-k_n x}{U}\right)$$

From the known variables:

$$k_a = \frac{0.55}{day}$$

$$k_c = \frac{0.35}{day}$$

$$k_n = \frac{0.25}{day}$$

$$U = \frac{6km}{day}$$

$$C_s = 10 \frac{mg}{L}$$

Need to split the system into two parts: the stream before Stream 2 is integrated and the river after Stream 2 is added:

Integrating the equation:

$$C(x) = C_s(1 - \alpha_1) + C_0\alpha_1 - B_0\alpha_2 - N_0\alpha_3$$

$$\alpha_1 = \exp(-\frac{k_a x}{U})$$

$$\alpha_2 = (\frac{k_c}{k_a - k_c})[\exp(-\frac{k_c x}{U}) - \exp(-\frac{k_a x}{U})]$$

$$\alpha_3 = (\frac{k_n}{k_a - k_n})[\exp(-\frac{k_n x}{U}) - \exp(-\frac{k_a x}{U})]$$

Need to find the initial concentration C_0 when $x = 0$. Let $x = 0$ when the river and Stream 1 just mix:

$$\alpha_1 = e^{-0} = 1$$

$$\alpha_2 = (\frac{k_c}{k_a - k_c})(1 - 1) = 0$$

$$\alpha_3 = (\frac{k_n}{k_a - k_n})(1 - 1) = 0$$

$$C(x) = C_0$$

Initial concentration of C_0, B_0, N_0 :

$$C_0 = 7.5 \frac{mg}{L} \times \frac{10}{11} + 5 \frac{mg}{L} \times \frac{1}{11} \approx 7.27 \frac{mg}{L}$$

$$B_0 = 5 \frac{mg}{L} \times \frac{10}{11} + 50 \frac{mg}{L} \times \frac{1}{11} \approx 9.09 \frac{mg}{L}$$

$$N_0 = 5 \frac{mg}{L} \times \frac{10}{11} + 35 \frac{mg}{L} \times \frac{1}{11} \approx 7.73 \frac{mg}{L}$$

Next, we need to consider the system after Stream 2 is added when $x = 15$ km. First, the concentration of the river before Stream 2 is added must be calculated:

$$C(x = 15) = C_s(1 - \alpha_1) + C_0\alpha_1 - B_0\alpha_2 - N_0\alpha_3$$

$$\alpha_1 = e^{-\frac{0.55 \times 15}{6}} \approx 0.252$$

$$\alpha_2 = \frac{0.35}{0.55 - 0.35} (e^{-\frac{0.35 \times 15}{6}} - e^{-\frac{0.55 \times 15}{6}}) \approx 0.287$$

$$\alpha_3 = \frac{0.25}{0.55 - 0.25} (e^{-\frac{0.25 \times 15}{6}} - e^{-\frac{0.55 \times 15}{6}}) \approx 0.235$$

Calculating the concentration of the river before Stream 2 is added:

$$C(x = 15) = 10(1 - 0.252) + 7.27(0.252) - 9.09(0.287) - 7.73(0.235) \approx 4.89 \frac{mg}{L}$$

New system equation after Stream 2 is added:

$$C(x) = C_s(1 - \alpha_1) + C_0\alpha_1 - B_0\alpha_2 - N_0\alpha_3$$

$$\alpha_1 = \exp(-\frac{k_a(x - 15)}{U})$$

$$\alpha_2 = (\frac{k_c}{k_a - k_c}) [\exp(-\frac{k_c(x - 15)}{U}) - \exp(-\frac{k_a(x - 15)}{U})]$$

$$\alpha_3 = (\frac{k_n}{k_a - k_n}) [\exp(-\frac{k_n(x - 15)}{U}) - \exp(-\frac{k_a(x - 15)}{U})]$$

We subtract x by 15 as the mixing starts at $x = 15$. The initial concentrations after the river and Stream 2 need to be calculated:

$$C_0 = 4.89 \frac{mg}{L} \times \frac{110}{125} + 5 \frac{mg}{L} \times \frac{15}{125} \approx 4.90 \frac{mg}{L}$$

$$B_0 = 9.09(1 - 0.287) \frac{mg}{L} \times \frac{110}{125} + 45 \frac{mg}{L} \times \frac{15}{125} \approx 11.10 \frac{mg}{L}$$

$$N_0 = 7.73(1 - 0.235) \frac{mg}{L} \times \frac{110}{125} + 35 \frac{mg}{L} \times \frac{15}{125} \approx 9.40 \frac{mg}{L}$$

With these two system equations, it is possible to plot the dissolved oxygen concentration over distance downstream

```

# Equation constants:
k_a = 0.55
k_c = 0.35
k_n = 0.25
C_s = 10 # mg/L
U = 6 # km/d

# System 1:
C1_0 = 7.27 # mg/L
B1_0 = 9.09 # mg/L
N1_0 = 7.73 # mg/L

# System 2:
C2_0 = 4.90 # mg/L
B2_0 = 11.10 # mg/L
N2_0 = 9.40 # mg/L

distance_range = [0:0.5:50;];
DO_values = [];

for d in distance_range
    if d <= 15
        alpha1 = exp(-k_a * d / U)
        alpha2 = (k_c / (k_a - k_c)) * (exp(-k_c * d / U) - exp(-k_a * d / U))
        alpha3 = (k_n / (k_a - k_n)) * (exp(-k_n * d / U) - exp(-k_a * d / U))

        C = C_s*(1-alpha1) + C1_0*alpha1 - B1_0*alpha2 - N1_0*alpha3
        push!(DO_values, C)
    else
        d_adjusted = d - 15
        alpha1 = exp(-k_a * d_adjusted / U)
        alpha2 = (k_c / (k_a - k_c)) * (exp(-k_c * d_adjusted / U) - exp(-k_a * d_adjusted / U))
        alpha3 = (k_n / (k_a - k_n)) * (exp(-k_n * d_adjusted / U) - exp(-k_a * d_adjusted / U))


        C = C_s*(1-alpha1) + C2_0*alpha1 - B2_0*alpha2 - N2_0*alpha3
        push!(DO_values, C)
    end
end

println(minimum(DO_values))
plot(distance_range, DO_values, xlabel="Distance downstream (km)", ylabel="Dissolved Oxygen")

```

2.8358280713478363

Dissolved Oxygen vs Distance

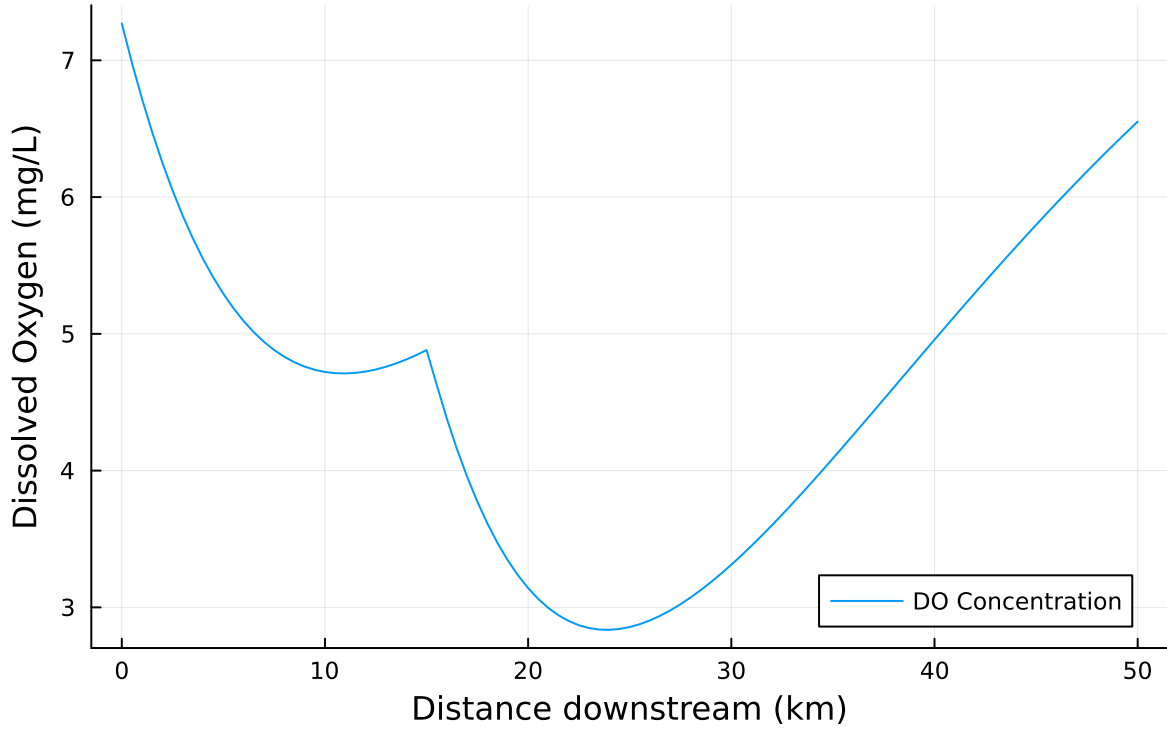

Problem 1.2

Implement a numerically-integrated (discretized) solution for the dissolved oxygen concentration. Using a resolution of 0.5km, conduct a simulation and plot the results on the same axis as the plot from Problem 1.1. How has the minimum value changed? What do you attribute this difference to (be specific about the source of the difference(s) in terms of the simulation dynamics, not just that one is a numerical approximation).

Numerical integrated solution will be utilizing the Forward Euler discretization.

$$U \frac{dC}{dx} = k_a(C_s - C) - k_c B_0 \exp\left(\frac{-k_c x}{U}\right) - k_n N_0 \exp\left(\frac{-k_n x}{U}\right)$$

$$\frac{dC}{dx} = \frac{k_a}{U}(C_s - C) - \frac{k_c}{U} B_0 \exp\left(\frac{-k_c x}{U}\right) - \frac{k_n}{U} N_0 \exp\left(\frac{-k_n x}{U}\right)$$

$$As \frac{dC}{dx} \approx \frac{\Delta C(x)}{\Delta x} = \frac{C(x + \Delta t) - C(x)}{\Delta x}$$

$$\frac{C(x + \Delta t) - C(x)}{\Delta x} = \frac{k_a}{U}(C_s - C(x)) - \frac{k_c}{U}B_0 \exp\left(\frac{-k_c x}{U}\right) - \frac{k_n}{U}N_0 \exp\left(\frac{-k_n x}{U}\right)$$

$$C(x + \Delta t) - C(x) = \Delta x \left[\frac{k_a}{U}(C_s - C(x)) - \frac{k_c}{U}B_0 \exp\left(\frac{-k_c x}{U}\right) - \frac{k_n}{U}N_0 \exp\left(\frac{-k_n x}{U}\right) \right]$$

$$C(x + \Delta t) = C(x) + \Delta x \left[\frac{k_a}{U}(C_s - C(x)) - \frac{k_c}{U}B_0 \exp\left(\frac{-k_c x}{U}\right) - \frac{k_n}{U}N_0 \exp\left(\frac{-k_n x}{U}\right) \right]$$

For $t = 0.5$,

$$C(x + 0.5) = C(x) + 0.5 \left[\frac{k_a}{U}(C_s - C(x)) - \frac{k_c}{U}B_0 \exp\left(\frac{-k_c x}{U}\right) - \frac{k_n}{U}N_0 \exp\left(\frac{-k_n x}{U}\right) \right]$$

When Stream 2 is added ($x \geq 15$), the equation will change:

$$C_0 = C(x = 15) * \frac{110}{125} + 5 * \frac{15}{125}$$

$$B_0 = B(x = 15) * \frac{110}{125} + 45 * \frac{15}{125}$$

$$N_0 = N(x = 15) * \frac{110}{125} + 45 * \frac{15}{125}$$

$$C(x + \Delta t) = C(x) + \Delta x \left[\frac{k_a}{U}(C_s - C(x)) - \frac{k_c}{U}B_0 \exp\left(\frac{-k_c(x-15)}{U}\right) - \frac{k_n}{U}N_0 \exp\left(\frac{-k_n(x-15)}{U}\right) \right]$$

```
# Equation constants:
k_a = 0.55
k_c = 0.35
k_n = 0.25
C_s = 10 # mg/L
U = 6 # km/d

function simulate_timestep1(C, i, C0, B0, N0)
    return k_a/U*(C_s - C) - k_c/U*B0*exp(-k_c*i/U) - k_n/U*N0*exp(-k_n*i/U)
end

function simulate_timestep2(C, i, C0, B0, N0)
    return k_a/U*(C_s - C) - k_c/U*B0*exp(-k_c*(i-15)/U) - k_n/U*N0*exp(-k_n*(i-15)/U)
end

function simulate_wastewater(C0, B0, N0, distance, dx)
    steps = Int64(distance / dx)
    C = zeros(steps + 1)
```

```

C[1] = C0
for i in 1:steps
    if i*dx <= 15
        C[i+1] = C[i] + dx * simulate_timestep1(C[i], i*dx, C0, B0, NO)
    else
        if i*dx == 15
            C0 = C[i]*110/125 + 5*15/125
            B0 = (B0 - B0*exp(-k_c*i/U))*110/125 + 45*15/125
            NO = (NO - NO*exp(-k_c*i/U))*110/125 + 45*15/125
        end
        C[i+1] = C[i] + dx * simulate_timestep2(C[i], i*dx, C0, B0, NO)
    end
end
return C
end

```

```


simulate_wastewater(7.27, 9.09, 7.73, 50, 0.5)

```

```

plot(distance_range, simulate_wastewater(7.27, 9.09, 7.73, 50, 0.5), xlabel="Distance downstream", legend=true)
plot!(distance_range, DO_values, label="DO Concentration (Analytical)", legend=true)

```

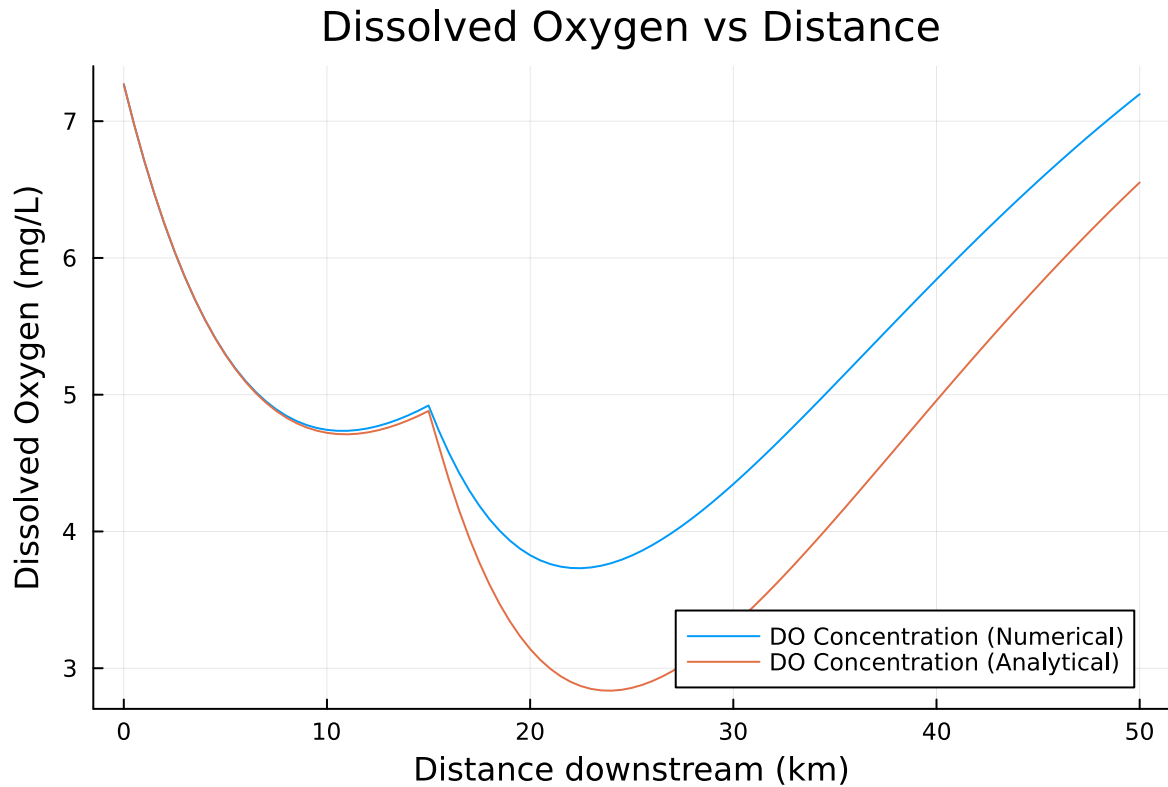Problem 1.3

Using the analytic model, what is the minimum level of treatment (% removal of organic waste; assume this is equivalent to the same level of reduction of the CBOD and NBOD) for waste stream 1 that will ensure that the dissolved oxygen concentration is in compliance with the 4 mg/L standard along with a 5% margin of safety, assuming that waste stream 2 remains untreated? How about if only waste stream 2 is treated?

Problem 1.4

Suppose you are responsible for designing a waste treatment plan for discharges into the river, with a regulatory mandate to keep the dissolved oxygen concentration above 4 mg/L. Discuss whether you'd opt to treat waste stream 2 alone or both waste streams equally. What other information might you need to make a conclusion, if any?

Problem 1.5

Suppose that it is known that the DO concentrations at the river inflow can vary according to a LogNormal(2.0, 0.15) distribution. Conduct a Monte Carlo simulation of the DO concentration in the river. If you treat only waste stream 1 (based on your analysis from Problem 1.3), what is the expected probability and 95% confidence interval that the river fails to comply with the regulatory standard of 4 mg/L? How did you decide that your Monte Carlo sample size was sufficiently large?

References

List any external references consulted, including classmates.