

SCHEMATIC DIAGRAM FOR BREADBOARD SETUP

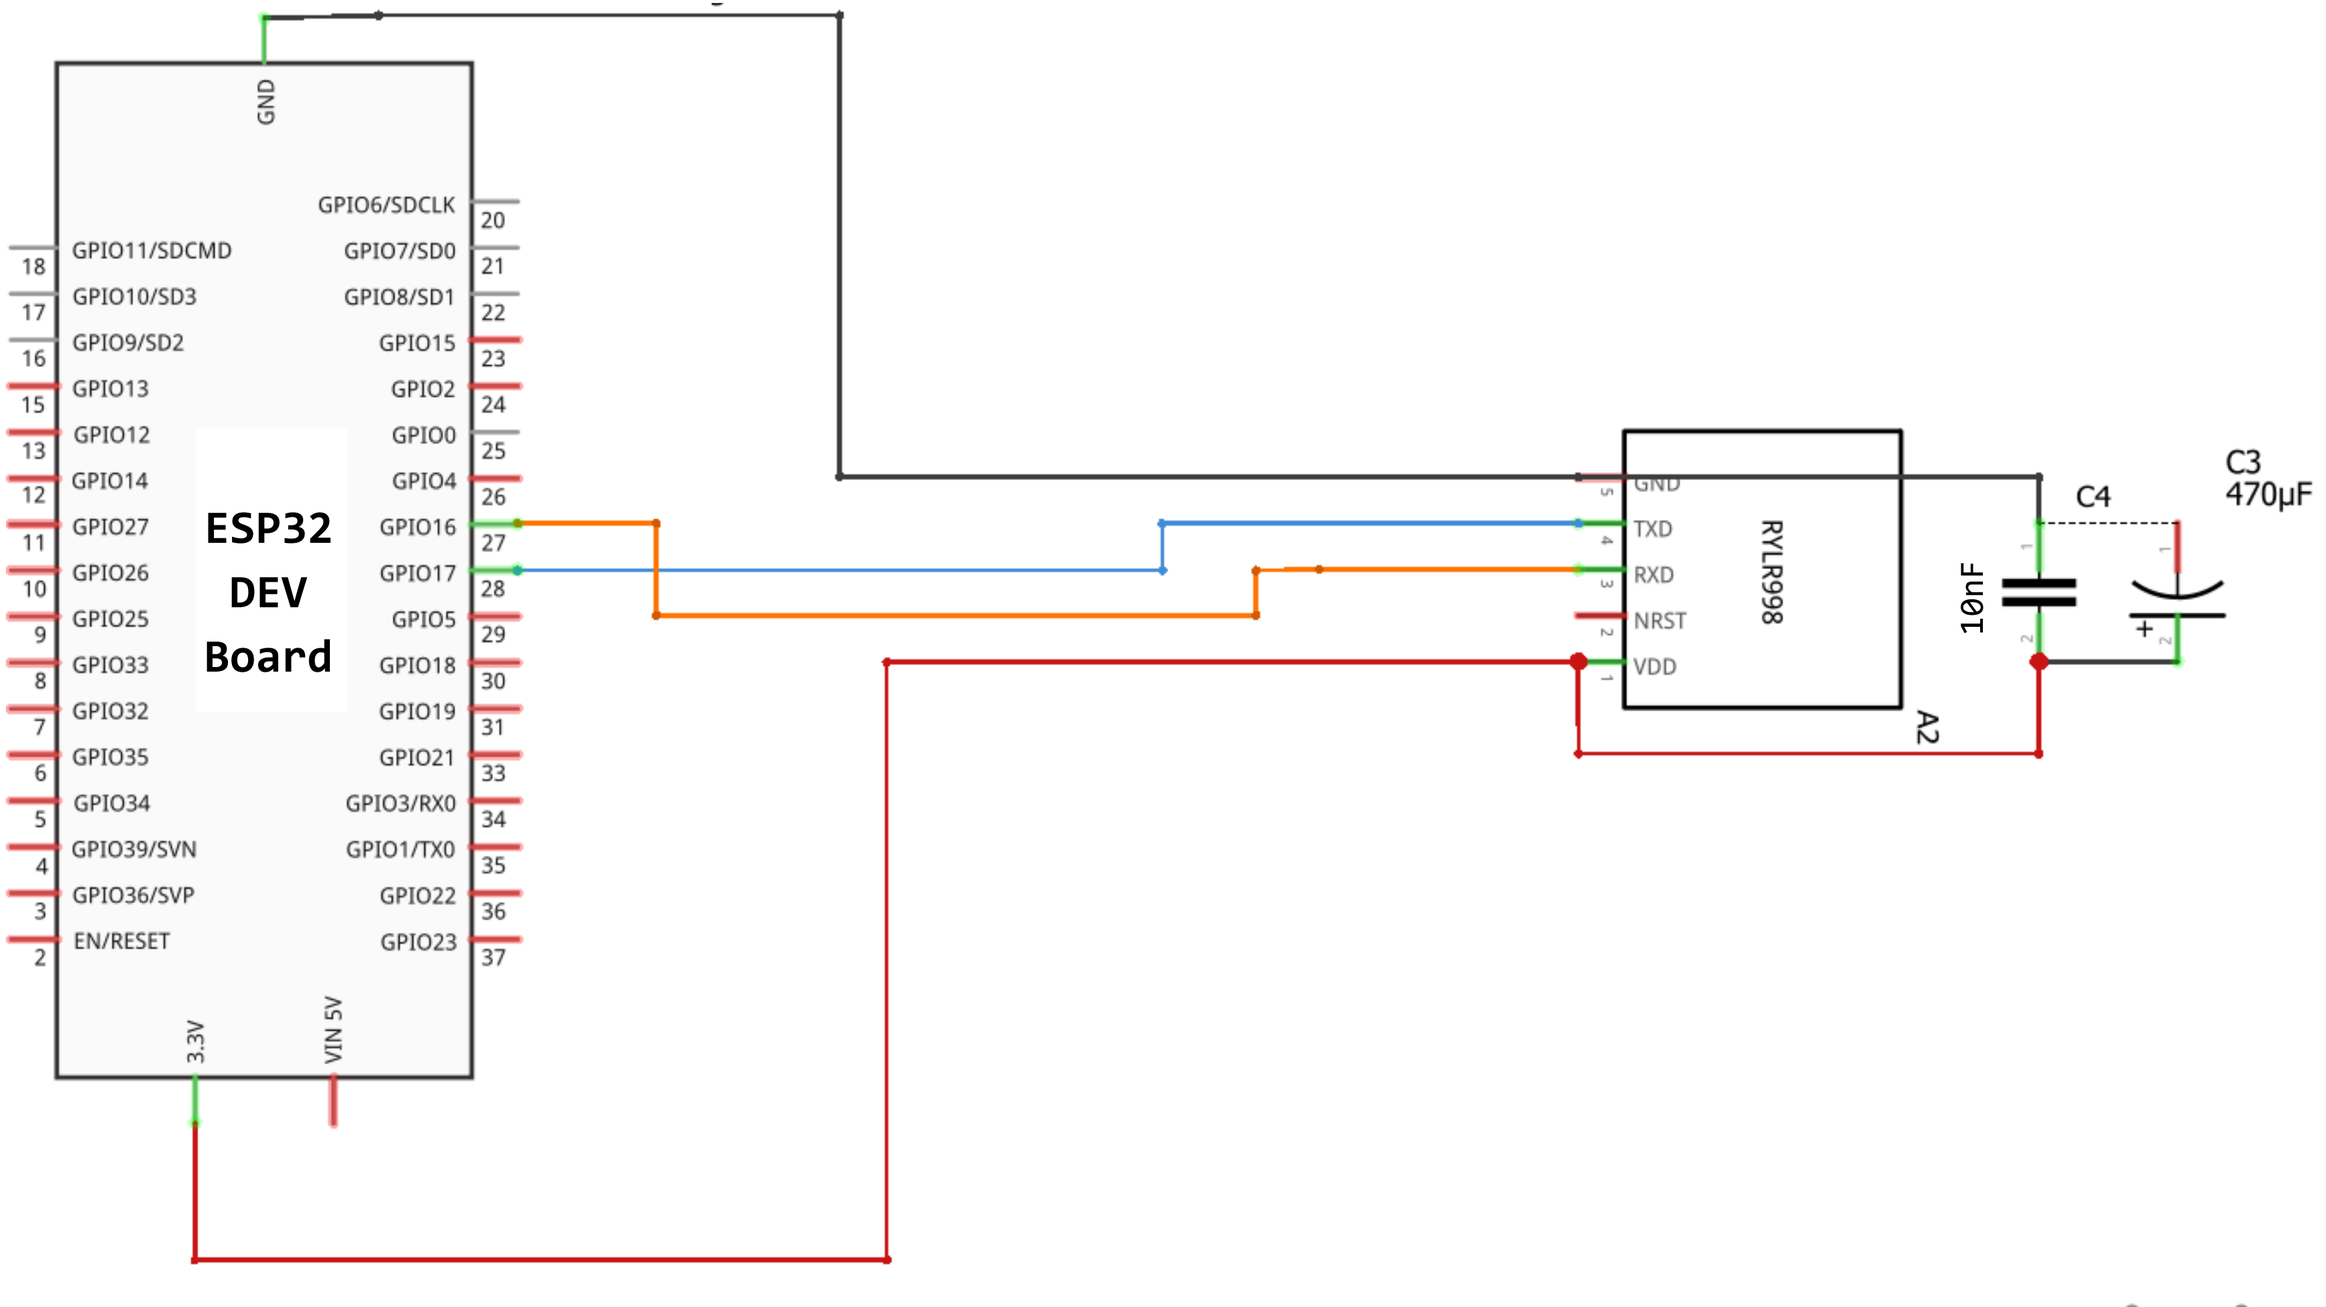

Schematic Diagram

(Perfboard)

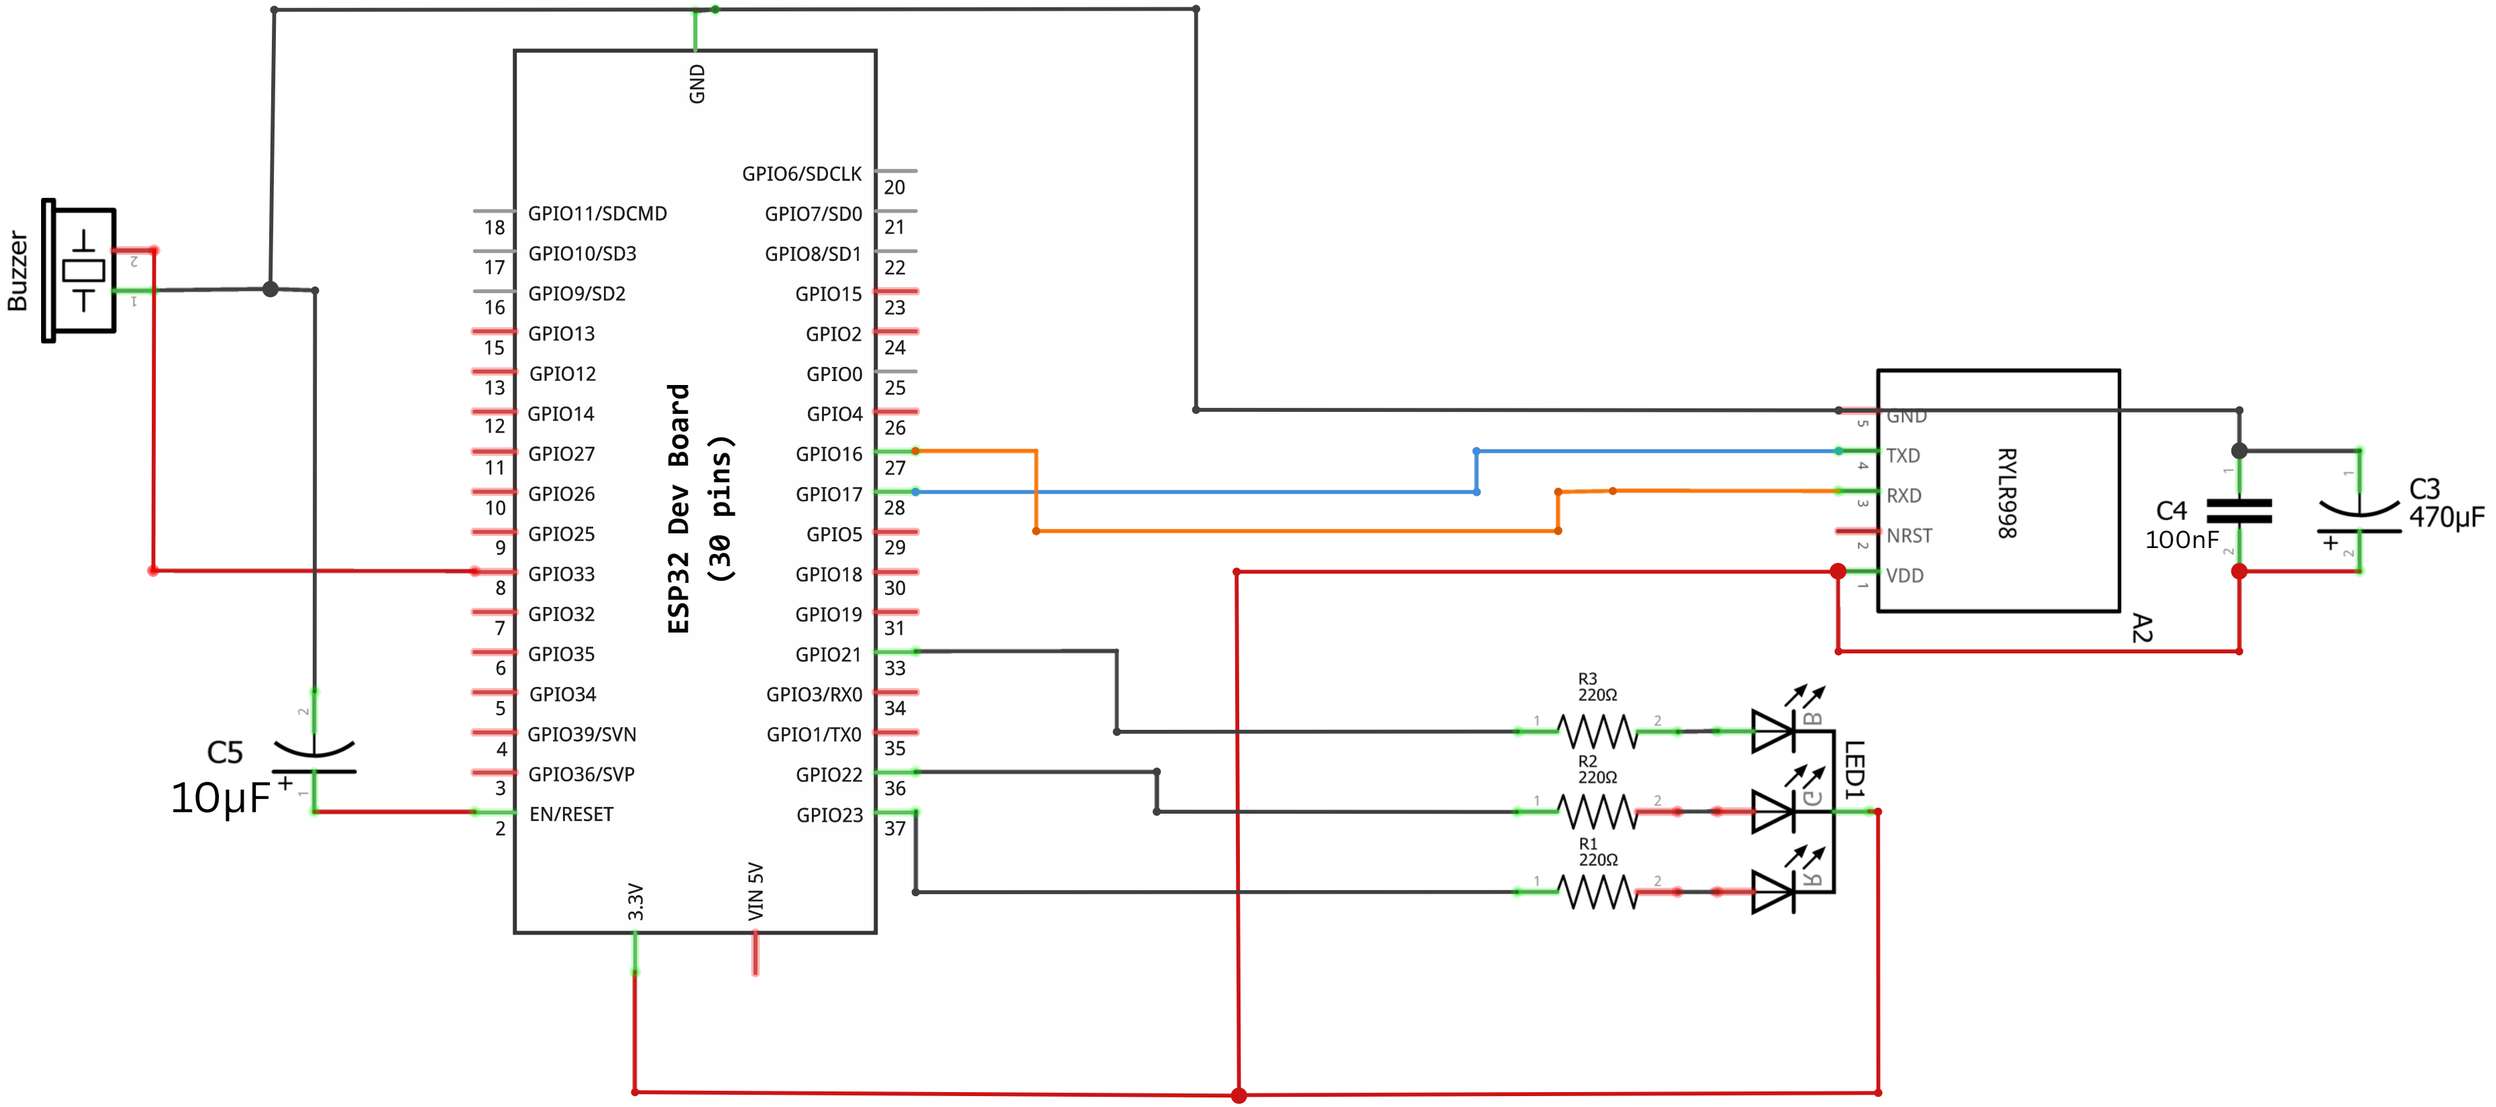

fritzing

CONNECTIONS

RYLR998 pin	Connects to
VDD	ESP32 3V3
NRST	Leave unconnected
RXD	ESP32 GPIO16 (TX)
TXD	ESP32 GPIO17 (RX)
GND	ESP32 GND

LED leg	Connects to
Common anode (longest leg)	ESP32 3V3
Red	Resistor, then GPIO23
Green	Resistor, then GPIO22
Blue	Resistor, then GPIO21

Capacitor	Connects to	Purpose
1-10µF	EN pin and GND (negative leg to GND)	Clean reset on power-up
100-470µF (recommended)	RYLR998 VDD and GND, as close to the module as possible	Absorbs the transmit current spike

Buzzer leg	Connects to
+	GPIO33
−	GND

BATTERY PACK SCHEMATIC DIAGRAM

