1

Process Dynamics and Control

1. Mathematical Preliminaries and Dynamic Response

Kee-Youn Yoo

Department of Chemical & Biomolecular Engineering, SeoulTech

서울과학기술대학교

2

What are we up to?

Before we design controllers we need a language for **how processes respond in time**: models in deviation variables, the Laplace transform, and transfer functions whose **poles** tell us the shape of the response without solving for it.

Section	Topic	Key result
1.1	process models, deviation variables, linearization	linear ODEs with zero initial conditions
1.2	Laplace transform	table look-up, initial- and final-value theorems
1.3	partial-fraction expansion	each pole gives one term of $f(t)$
1.4	transfer functions, poles and zeros	poles fix the time dependence, zeros the coefficients
1.5–1.6	first- and second-order systems	τ, K, ζ; overshoot, decay ratio, settling time
1.7–1.9	dead time, higher order, zeros	Padé, FOPDT approximation, inverse response

Any linear model breaks into first-order terms by partial fractions, and complex-conjugate pairs combine into second-order terms, so first- and second-order systems are all we need to study in detail.

서울과학기술대학교


3

1.1 Process Models and Deviation Variables

서울과학기술대학교

A simple differential-equation model

4

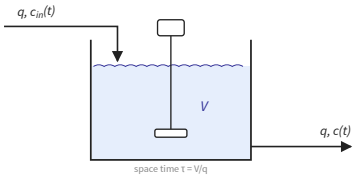

Mass balance of a well-mixed tank:

$$\tau\frac{dc}{dt} = c_{in} - c, \qquad c(0) = c_0, \qquad \tau = \frac{V}{q}$$

Define **deviation variables** from the initial steady state: $\bar{c} = c - c_0$, $\bar{c}_{in} = c_{in} - c_0$.


$$\tau\frac{d\bar{c}}{dt} + \bar{c} = \bar{c}_{in}, \qquad \bar{c}(0) = 0$$


Why deviation variables? The initial condition becomes **zero**, so the Laplace transform of the model contains no initial-condition terms and gives a clean input–output ratio. For reference, the solution is the convolution $\bar{c}(t) = \frac{1}{\tau}\int_0^t \bar{c}_{in}(\alpha)e^{-(t-\alpha)/\tau}d\alpha$.

서울과학기술대학교

Linearization of nonlinear models

5





$$A\frac{dh}{dt} = q_i - \beta\sqrt{h}, \qquad h(0) = h_s$$

Steady state: $0 = q_{i,s} - \beta\sqrt{h_s}$. Taylor-expand $\sqrt{h}$ about h_s:

$$A\frac{dh}{dt} \simeq q_i - \beta\left[\sqrt{h_s} + \frac{1}{2\sqrt{h_s}}(h - h_s)\right]$$

Subtract the steady state and use $\bar{q}_i = q_i - q_{i,s}$, $\bar{h} = h - h_s$:

$$A\frac{d\bar{h}}{dt} + \frac{\beta}{2\sqrt{h_s}}\bar{h} = \bar{q}_i, \qquad \bar{h}(0) = 0$$

General case (one state y, inputs $\mathbf{u}$): with $y' = y - y_s$, $\mathbf{u}' = \mathbf{u} - \mathbf{u}_s$,

$$\frac{dy'}{dt} = \frac{\partial f}{\partial y}\Big|_s y' + \nabla_{\mathbf{u}}^{T} f\big|_s \mathbf{u}'$$

The model is accurate only **near the operating point**.

서울과학기술대학교

Example 1.1 Linearize a mixed vessel

6

$$V\frac{dc}{dt} = q\,c_i - q\,c \qquad (q \text{ and } c_i \text{ both vary with time})$$

The product terms are nonlinear. Expand about $(q_s, c_{i,s}, c_s)$:

$$qc_i \simeq q_s c_{i,s} + c_{i,s}\,q' + q_s\,c_i'$$

$$qc \simeq q_s c_s + c_s\,q' + q_s\,c'$$

Subtract the steady state $0 = q_s(c_{i,s} - c_s)$:

$$V\frac{dc'}{dt} = q_s(c_i' - c') + (c_{i,s} - c_s)\,q'$$

At steady state $c_s = c_{i,s}$, so the flow term **vanishes**:


$$\frac{V}{q_s}\frac{dc'}{dt} + c' = c_i'$$

To first order, a flow change does not move the concentration; only c_i does.

서울과학기술대학교

Example 1.2 Stirred-tank heater

7



$$\rho C_p V \frac{dT}{dt} = \rho C_p q(T_i - T) + UA(T_H - T)$$

With $\tau = V/q$ and $\kappa = UA/(\rho C_p q)$, in deviation variables:

$$\tau \frac{d\bar{T}}{dt} + (1+\kappa)\bar{T} = \bar{T}_i + \kappa \bar{T}_H$$

Pole-zero form

$$T(s) = \frac{K_i}{s+a} T_i(s) + \frac{K_H}{s+a} T_H(s)$$

$$a = \frac{1+\kappa}{\tau},\ K_i = \frac{1}{\tau},\ K_H = \frac{\kappa}{\tau}$$

Time-constant form (used in control)

$$T(s) = \frac{K_d}{\tau_p s + 1} T_i(s) + \frac{K_p}{\tau_p s + 1} T_H(s)$$


$$\tau_p = \frac{\tau}{1+\kappa},\ K_d = \frac{1}{1+\kappa},\ K_p = \frac{\kappa}{1+\kappa}$$

One output, two inputs: the heater temperature T_H will be our **manipulated** variable, the inlet temperature T_i a **disturbance**. Both see the same pole $-1/\tau_p$.

서울과학기술대학교

Example 1.3 Non-isothermal CSTR

8

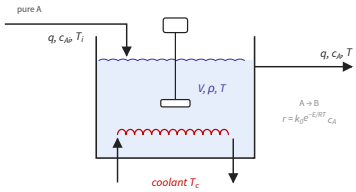

$$V \frac{dc_A}{dt} = q(c_{Ai} - c_A) - Vk(T)\,c_A$$

$$\rho V C_p \frac{dT}{dt} = \rho q C_p (T_i - T) + (-\Delta H_R) V k(T) c_A + UA(T_c - T)$$

$k(T)c_A$ is nonlinear in **both** states. With q, c_{Ai}, T_i constant, linearize ($k_s' = k_s E/RT_s^2$):

$$\frac{d}{dt}\begin{bmatrix} c_A' \\ T' \end{bmatrix} = \begin{bmatrix} a_{11} & a_{12} \\ a_{21} & a_{22} \end{bmatrix} \begin{bmatrix} c_A' \\ T' \end{bmatrix} + \begin{bmatrix} 0 \\ b_2 \end{bmatrix} T_c'$$

$$a_{11} = -\frac{q}{V} - k_s',\quad a_{12} = -k_s' c_{As},\quad a_{21} = \frac{(-\Delta H_R)k_s'}{\rho C_p}$$

$$a_{22} = -\frac{q}{V} - \frac{UA}{\rho V C_p} + \frac{(-\Delta H_R)k_s' c_{As}}{\rho C_p},\quad b_2 = \frac{UA}{\rho V C_p}$$

$$\frac{C_A'(s)}{T_c'(s)} = \frac{a_{12} b_2}{(s - a_{11})(s - a_{22}) - a_{12} a_{21}}$$

second order: the two balances are coupled.

서울과학기술대학교

Problem #1 (homework)

9

For the CSTR of Example 1.3, find all the approximate transfer functions relating the outputs c_A and T to the inputs $c_{A,i}$, T_i and T_c.

Show that all six transfer functions share **one** denominator, and explain why.

Hint: write the Laplace-transformed linear model as $(s\mathbf{I} - \mathbf{A})\mathbf{x} = \mathbf{B}\mathbf{u}$ and solve with Cramer's rule; the denominator is $\det(s\mathbf{I} - \mathbf{A})$.

서울과학기술대학교

10

1.2 Laplace Transform

11

Definition and the look-up table approach

$$\mathcal{L}[f(t)] = \int_0^\infty f(t)e^{-st}dt = F(s), \qquad f(t) = \mathcal{L}^{-1}[F(s)] = \frac{1}{2\pi j}\int_{\gamma-j\infty}^{\gamma+j\infty} F(s)e^{st}ds$$

- In control we **never** use the inverse integral: we break $F(s)$ into simple parts and read the answer from a **table**.
- $\mathcal{L}$ is a **linear operator**:

$$\mathcal{L}[af_1 + bf_2] = aF_1(s) + bF_2(s)$$

- A linear ODE becomes an **algebraic** equation in s

The real goal: predict the **time response without the inverse transform**. The answer lies in the roots of the characteristic equation (§1.4).

12

Transforms of common functions

$f(t)$	$F(s)$
$\delta(t)$ (unit impulse)	1
$u(t)$ (unit step)	$\frac{1}{s}$
t (ramp)	$\frac{1}{s^2}$
$t^{n-1}/(n-1)!$	$\frac{1}{s^n}$
e^{-at}	$\frac{1}{s+a}$
$t^{n-1}e^{-at}/(n-1)!$	$\frac{1}{(s+a)^n}$
$\sin\omega t,\ \cos\omega t$	$\frac{\omega}{s^2+\omega^2},\ \frac{s}{s^2+\omega^2}$
$e^{-at}\sin\omega t,\ e^{-at}\cos\omega t$	$\frac{\omega}{(s+a)^2+\omega^2},\ \frac{s+a}{(s+a)^2+\omega^2}$


Operation	Transform
$\frac{df}{dt}$	$sF(s) - f(0)$
$\frac{d^2f}{dt^2}$	$s^2F(s) - sf(0) - f'(0)$
$\int_0^t f\,dt$	$\frac{F(s)}{s}$
$f(t-t_0)u(t-t_0)$	$e^{-st_0}F(s)$
$e^{-at}f(t)$	$F(s+a)$

Derivation by integration by parts, e.g. $\mathcal{L}[df/dt] = fe^{-st}\big|_0^\infty + s\int_0^\infty fe^{-st}dt = sF(s) - f(0)$. With deviation variables all $f^{(k)}(0) = 0$, so $d/dt \to s$ and $\int dt \to 1/s$.

Try: derive $\mathcal{L}[\cos\omega t]$ from $\cos\omega t = (e^{j\omega t} + e^{-j\omega t})/2$.

13

Inputs common to control problems

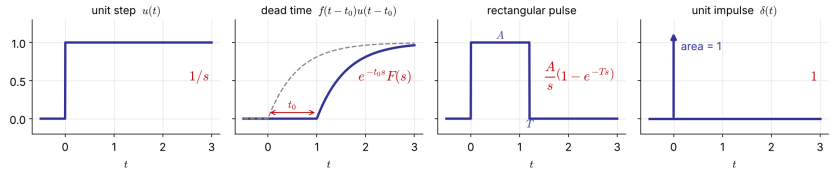

- Pulse: $A[u(t)-u(t-T)] \Rightarrow \dfrac{A}{s}(1-e^{-sT})$
- Impulse: $\delta(t)=\lim\limits_{T\to 0}\dfrac{u(t)-u(t-T)}{T}$, so
  $\mathcal{L}[\delta]=\lim\limits_{T\to 0}\dfrac{1-e^{-sT}}{Ts}=1$
- $\int_{-\infty}^{\infty}\delta\,dt=1,\quad \int_{-\infty}^{\infty}f(t)\delta(t-t_0)\,dt=f(t_0)$
- **Dead time** (time shift) multiplies by e^{-st_0}: an exponential, not a polynomial, in s (§1.7).

서울과학기술대학교

14

Initial- and final-value theorems

Values of $f(t)$ at the two extremes **without** the inverse transform:

$$\lim_{t\to 0^+} f(t)=\lim_{s\to\infty} sF(s), \qquad \lim_{t\to\infty} f(t)=\lim_{s\to 0} sF(s)$$

Proof of the final value:
$\lim\limits_{s\to 0}\int_0^{\infty}\dfrac{df}{dt}e^{-st}dt=\int_0^{\infty}df=f(\infty)-f(0)$, and the left side is $\lim_{s\to 0}[sF(s)-f(0)]$.

The final-value theorem holds **only if $f(\infty)$ exists**: all poles of $sF(s)$ must lie in the left half-plane.

Example 1.4 What is $f(\infty)$?

a. $F=\dfrac{6(s-2)(s+2)}{s(s+1)(s+3)(s+4)}$: $sF(0)=\dfrac{6(-2)(2)}{(3)(4)}=-2$

b. $F=\dfrac{1}{s-2}$, i.e. $f=e^{2t}$: $sF(0)=0$, but $f\to\infty$: theorem **not applicable** (pole at $+2$).

c. $F=\dfrac{6(s+3)}{s^3+s^2-4s-4}=\dfrac{6(s+3)}{(s+1)(s+2)(s-2)}$: again a pole at $+2$; **$f(\infty)$ does not exist**.

서울과학기술대학교

15

1.3 Partial-Fraction Expansion

서울과학기술대학교

16

Breaking $F(s)$ into table entries

$$F(s) = \frac{q(s)}{p(s)} = \frac{\alpha_1}{s+a_1} + \frac{\alpha_2}{s+a_2} + \cdots + \frac{\alpha_n}{s+a_n} \quad \Rightarrow \quad f(t) = \sum_i \alpha_i e^{-a_i t}$$

$-a_i$ are the roots of $p(s) = 0$ (order n > order of q). Heaviside's cover-up rule:

$$\alpha_i = (s+a_i)\frac{q(s)}{p(s)}\bigg|_{s=-a_i}$$

1. The **time dependence** of $f(t)$ comes entirely from the roots of the **denominator**.
2. The **numerator** affects only the coefficients α_i.

3. Poles **closer to the origin** give terms that decay more slowly: they are **dominant**.
4. Three cases: distinct real, complex, and repeated roots.

서울과학기술대학교


17

Example 1.5 Case 1: distinct real roots

$s^3 + s^2 - 4s - 4 = (s+1)(s+2)(s-2)$. Two numerators, same denominator:

	$\frac{6s^2-12}{(s+1)(s+2)(s-2)}$	$\frac{6s}{(s+1)(s+2)(s-2)}$
$\alpha_1 = \frac{q}{(s+2)(s-2)}\Big\|_{-1}$	$\frac{-6}{-3} = 2$	$\frac{-6}{-3} = 2$
$\alpha_2 = \frac{q}{(s+1)(s-2)}\Big\|_{-2}$	$\frac{12}{4} = 3$	$\frac{-12}{4} = -3$
$\alpha_3 = \frac{q}{(s+1)(s+2)}\Big\|_{2}$	$\frac{12}{12} = 1$	$\frac{12}{12} = 1$
$f(t)$	$2e^{-t} + 3e^{-2t} + e^{2t}$	$2e^{-t} - 3e^{-2t} + e^{2t}$

Same three exponentials, different coefficients: the numerator changes **only the weights**.



The same procedure gives $\frac{6}{(s+1)(s+2)(s+3)} = \frac{3}{s+1} - \frac{6}{s+2} + \frac{3}{s+3}$.

서울과학기술대학교

18

Example 1.6 Case 2: complex roots

$$F(s) = \frac{s+5}{s^2+4s+13}, \qquad s^2+4s+13 = 0 \Rightarrow s = -2 \pm 3j$$

Method 1: cover-up with complex numbers

$$\alpha = \frac{s+5}{s-(-2-3j)}\bigg|_{s=-2+3j} = \frac{3+3j}{6j} = \frac{1-j}{2}, \quad \alpha^* = \frac{1+j}{2}$$

$$f(t) = \tfrac{1-j}{2}e^{(-2+3j)t} + \tfrac{1+j}{2}e^{(-2-3j)t}$$

Method 2: complete the square (faster)

$$\frac{s+5}{(s+2)^2+3^2} = \frac{s+2}{(s+2)^2+3^2} + \frac{3}{(s+2)^2+3^2}$$

$$f(t) = e^{-2t}(\cos 3t + \sin 3t)$$

Euler's formula collects the terms into real functions.

Phase-lag form (the one we use): $\cos 3t + \sin 3t = \sqrt{2}\sin(3t+\phi)$, $\phi = \tan^{-1}1 = \pi/4$, so $f(t) = \sqrt{2}\,e^{-2t}\sin(3t+\pi/4)$. Roots $-a \pm bj$ always give e^{-at} times an oscillation of frequency b

서울과학기술대학교

19

Example 1.7 Case 3: repeated roots

$$\frac{2}{(s+1)^3(s+2)} = \frac{\alpha_1}{s+1} + \frac{\alpha_2}{(s+1)^2} + \frac{\alpha_3}{(s+1)^3} + \frac{\alpha_4}{s+2}$$

$\alpha_4 = \left.\frac{2}{(s+1)^3}\right|_{-2} = -2$. Multiply by $(s+1)^3$:

$$\frac{2}{s+2} = \alpha_1(s+1)^2 + \alpha_2(s+1) + \alpha_3 + \alpha_4\frac{(s+1)^3}{s+2}$$

Set $s=-1$, then differentiate and set $s=-1$ again:

$$\alpha_3 = 2, \quad \alpha_2 = -\left.\frac{2}{(s+2)^2}\right|_{-1} = -2, \quad \alpha_1 = \frac{1}{2}\left.\frac{4}{(s+2)^3}\right|_{-1}$$

$$f(t) = 2\left[\left(1 - t + \frac{t^2}{2}\right)e^{-t} - e^{-2t}\right]$$

In general

$$\mathcal{L}^{-1}\left[\sum_{k=1}^{n}\frac{\alpha_k}{(s+a)^k}\right] = \left[\alpha_1 + \alpha_2 t + \cdots + \frac{\alpha_n t^{n-1}}{(n-1)!}\right]e^{-at}$$

Still based on the root $-a$, but the polynomial in t makes it **decay more slowly**.

서울과학기술대학교

20

Partial fractions by computer

Python

```python
import sympy as sp
s, t = sp.symbols('s t'); tp = sp.Symbol('t', positive=True)

for F in [(6*s**2 - 12)/(s**3 + s**2 - 4*s - 4),      # Ex 1.5
          (s + 5)/(s**2 + 4*s + 13),                   # Ex 1.6
          2/((s + 1)**3*(s + 2))]:                     # Ex 1.7
    print(sp.apart(F, s), '  ->  ', sp.inverse_laplace_transform(F, s, tp))

import numpy as np, scipy.signal as sig
r, p, k = sig.residue([6, 0, -12], [1, 1, -4, -4])     # residues, poles, direct term
print(np.round(r, 4), np.round(p, 4))                  # [3, 2, 1]  at  [-2, -1, 2]
```

MATLAB

```matlab
[r, p, k] = residue([6 0 -12], [1 1 -4 -4])     % Ex 1.5: residues and poles
roots([1 1 -4 -4])                               % 2, -2, -1

syms s t
ilaplace((s + 5)/(s^2 + 4*s + 13))               % Ex 1.6
ilaplace(2/((s + 1)^3*(s + 2)))                  % Ex 1.7
partfrac(2/((s + 1)^3*(s + 2)), s)
```

서울과학기술대학교

21

Problem #2 (homework)

a. Find $f(t)$ for

$$F(s) = \frac{s+\beta}{(s+a)^2+\omega^2}$$

b. Find $f(t)$ for

$$F(s) = \frac{s\sin\phi + \omega\cos\phi}{s^2+\omega^2}$$

Check your answers with `sympy.inverse_laplace_transform` or MATLAB `ilaplace`.

서울과학기술대학교

22

1.4 Transfer Functions, Poles and Zeros

서울과학기술대학교

23

The transfer function

For a linear ODE with zero initial conditions ($n \geq m$)

$$a_n y^{(n)} + \cdots + a_1 y' + a_0 y = b_m x^{(m)} + \cdots + b_1 x' + b_0 x$$

the Laplace transform gives the **transfer function**, the ratio of output to input:

$$G(s) = \frac{Y(s)}{X(s)} = \frac{b_m s^m + \cdots + b_1 s + b_0}{a_n s^n + \cdots + a_1 s + a_0} = \frac{Q(s)}{P(s)}$$

Pole-zero form

$$G(s) = \frac{b_m}{a_n} \frac{(s - z_1)\cdots(s - z_m)}{(s - p_1)\cdots(s - p_n)}$$

$P(s)$ is the **characteristic polynomial**; its roots are the **poles**, the roots of $Q(s)$ the **zeros**.

Time-constant form (real roots)

$$G(s) = K \frac{(\tau_a s + 1)\cdots(\tau_m s + 1)}{(\tau_1 s + 1)\cdots(\tau_n s + 1)}$$


Steady-state gain: final change of y per unit step in x,
$K = \lim_{s\to 0} sG(s)\frac{1}{s} = G(0) = \frac{b_0}{a_0}$

서울과학기술대학교

24

Poles tell the shape of the response

Each pole contributes a term e^{pt}: the real part sets decay or growth, the imaginary part the oscillation

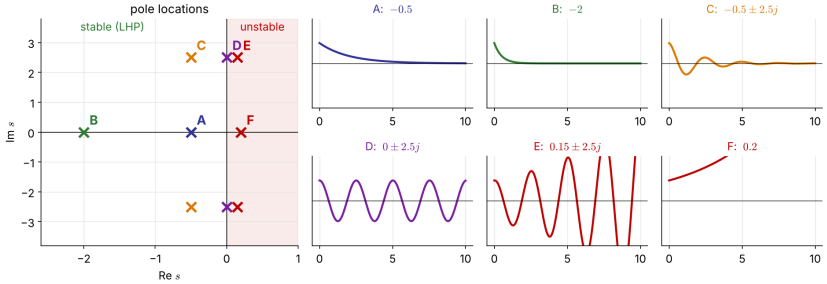

- real pole $p \to e^{pt}$; repeated m times → $(\alpha_1 + \cdots + \alpha_m t^{m-1})e^{pt}$
- complex pair $-\zeta/\tau \pm j\sqrt{1-\zeta^2}/\tau \to e^{-\zeta t/\tau}\sin(\sqrt{1-\zeta^2}\,t/\tau + \phi)$

- the discussion of poles is **independent of the input**; the actual $y(t)$ also depends on $x(t)$
- zeros change only the coefficients
- **Stability**: all poles must have **negative real parts** (Ch 4).

서울과학기술대학교

25

Back to the first-order tank: step and impulse

From §1.1, $\tau\frac{d\bar{c}}{dt}+\bar{c}=\bar{c}_{in} \Rightarrow (\tau s+1)C(s)=C_{in}(s) \Rightarrow G(s)=\frac{C(s)}{C_{in}(s)}=\frac{1}{\tau s+1}$, one pole at $-1/\tau$.

Unit step $C_{in}=1/s$

$$C=\frac{1}{(\tau s+1)s}=\frac{1}{s}-\frac{1}{s+1/\tau}$$

$$\bar{c}(t)=1-e^{-t/\tau}$$

Unit impulse $C_{in}=1$

$$C=\frac{1}{\tau s+1}=\frac{1}{\tau}\frac{1}{s+1/\tau}$$

$$\bar{c}(t)=\frac{1}{\tau}e^{-t/\tau}$$

Without specifying the input we already know $\bar{c}(t)$ must contain $e^{-t/\tau}$: that is what the pole tells us.

서울과학기술대학교

26

1.5 First-Order Systems

서울과학기술대학교

27

First-order model

$$a_1\frac{dy}{dt}+a_0y=bx(t) \quad \Rightarrow \quad \tau\frac{dy}{dt}+y=Kx(t), \qquad G(s)=\frac{Y(s)}{X(s)}=\frac{K}{\tau s+1}$$

$\tau=a_1/a_0$: **time constant** (시간상수), $K=b/a_0$: **steady-state gain** (정상상태 이득), one real pole at $-1/\tau$.

Step $x=Mu(t)$:

$$Y=\frac{KM}{s(\tau s+1)} \Rightarrow y(t)=KM\left(1-e^{-t/\tau}\right)$$

t	$y/KM=1-e^{-t/\tau}$
τ	0.632
2τ	0.865
3τ	0.950
4τ	0.982
5τ	0.993

After 3τ within 5%, after 5τ within 1%: "settled".

Impulse $x=M\delta(t)$:

$$y(t)=\frac{KM}{\tau}e^{-t/\tau}$$


Final value check: $\lim_{s\to 0} s\frac{KM}{s(\tau s+1)}=KM$.

서울과학기술대학교

28

Effect of τ and K

The **larger the time constant, the slower** the response. The **larger the gain, the more sensitive** the output to the input.

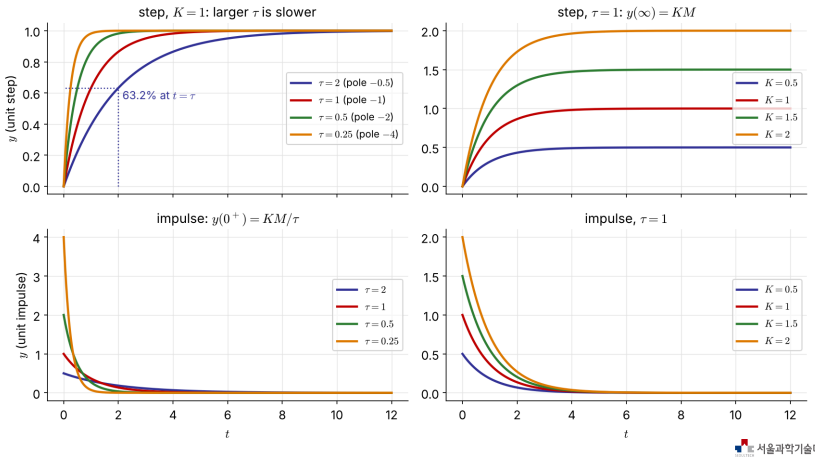

서울과학기술대학교

29


Ramp input and the integrating process

Ramp $x = at$, $X = a/s^2$:

$$Y = \frac{Ka}{s^2(\tau s+1)} = \frac{Ka\tau^2}{\tau s+1} - \frac{Ka\tau}{s} + \frac{Ka}{s^2}$$

$$y(t) = Ka\tau\left(e^{-t/\tau} - 1\right) + Kat$$


$\rightarrow Ka(t-\tau)$ for $t \gg \tau$: the output lags the input by τ.



Integrating process ($a_0 = 0$):

$$\frac{dy}{dt} = K_I x(t) \Rightarrow G(s) = \frac{K_I}{s}$$

a **pole at the origin**.

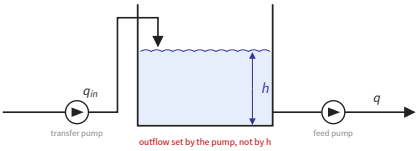


$$A\frac{d\bar{h}}{dt} = \bar{q}_{in} - \bar{q} \Rightarrow H(s) = \frac{1}{A}\frac{Q_{in}(s) - Q(s)}{s}$$

A step input gives a **ramp**; an impulse is **not** forgotten, the level keeps whatever was added. Not self-regulating: levels need control.

서울과학기술대학교

30

Example 1.8 Two stirred tanks in series

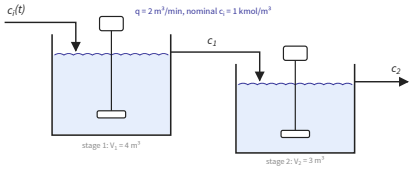

$$\tau_1\frac{d\bar{c}_1}{dt} + \bar{c}_1 = \bar{c}_i, \quad \tau_2\frac{d\bar{c}_2}{dt} + \bar{c}_2 = \bar{c}_1$$


$$\frac{C_2(s)}{C_i(s)} = \frac{1}{(\tau_1 s+1)(\tau_2 s+1)}$$

$\tau_1 = V_1/q = 2$ min, $\tau_2 = V_2/q = 1.5$ min

Feed: $c_i = 6$ for $0 < t < 0.25$ min, otherwise 1, so $\bar{c}_i$ is a pulse of height 5:

$$C_i(s) = \frac{5}{s}\left(1 - e^{-s/4}\right) \quad \text{or, as an impulse,} \quad C_i(s) = \frac{5}{4}$$

$$C_2(s) = \frac{5(1-e^{-s/4})}{s(2s+1)(1.5s+1)} \quad \text{or} \quad \frac{5/4}{(2s+1)(1.5s+1)}$$

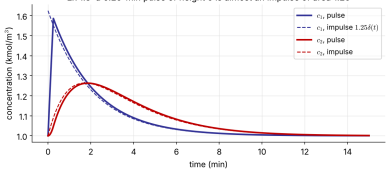

The original MATLAB script used `pulselength = 1.25`, a pulse 5× too long.

서울과학기술대학교

31

Problem #3 (homework)

For Example 1.8, carry out the inverse transforms:

a. the impulse response $\bar{c}_2(t)$ for $C_i = 5/4$;

b. the pulse response $\bar{c}_2(t)$, using the dead-time property for the factor $e^{-s/4}$.

Plot both together with $\bar{c}_1(t)$ and compare with the figure on the previous slide.

서울과학기술대학교

32

1.6 Second-Order Systems

서울과학기술대학교

33

Second-order model

$$\tau^2 \frac{d^2y}{dt^2} + 2\zeta\tau\frac{dy}{dt} + y = Kx(t) \quad \Rightarrow \quad G(s) = \frac{K}{\tau^2 s^2 + 2\zeta\tau s + 1} = \frac{K\omega_n^2}{s^2 + 2\zeta\omega_n s + \omega_n^2}$$

τ: natural period, $\omega_n = 1/\tau$: natural frequency, ζ: **damping ratio** (감쇠계수), K: steady-state gain.
Poles:


$$p_{1,2} = -\frac{\zeta}{\tau} \pm \frac{\sqrt{\zeta^2 - 1}}{\tau} \qquad \textbf{(stable only if } \zeta > 0, \textbf{ since } \tau > 0)$$

ζ	poles	name	response
$\zeta > 1$	two distinct real, $-1/\tau_1,\ -1/\tau_2$	**overdamped**	sluggish, $G = K/[(\tau_1 s+1)(\tau_2 s+1)]$
$\zeta = 1$	repeated real, $-1/\tau$	**critically damped**	fastest without oscillation
$0 < \zeta < 1$	complex pair $-\zeta/\tau \pm j\sqrt{1-\zeta^2}/\tau$	**underdamped**	overshoot, decaying oscillation; τ is **not** a time constant
$\zeta = 0$	purely imaginary $\pm j/\tau$	**undamped**	sustained oscillation at ω_n

서울과학기술대학교

34

Example 1.9 Oscillations of a damped manometer



A pressure step $p_a - p_b$ sets the liquid in motion (laminar, isothermal). A momentum balance on the liquid column gives

$$\frac{4}{3}\pi R^2 L\rho\frac{d^2h}{dt^2} = -8\pi L\mu\frac{dh}{dt} - 2\pi R^2\rho g h + \pi R^2(p_a - p_b)$$

$$\frac{d^2h}{dt^2} + \frac{6\mu}{R^2\rho}\frac{dh}{dt} + \frac{3g}{2L}h = \frac{3}{4}\frac{p_a - p_b}{\rho L}$$

Compare with $s^2 + 2\zeta\omega_n s + \omega_n^2$:

$$\omega_n = \sqrt{\frac{3g}{2L}}, \qquad \zeta = \frac{3\mu}{R^2\rho\omega_n}$$


Critical damping $\zeta = 1$ at $R_{cr} = \left(\frac{6\mu^2 L}{\rho^2 g}\right)^{1/4}$. Wider tubes oscillate, narrower tubes creep.

Bird, Stewart & Lightfoot, *Transport Phenomena*, 2nd ed., pp. 219–221.

서울과학기술대학교

35

Step response of a second-order model

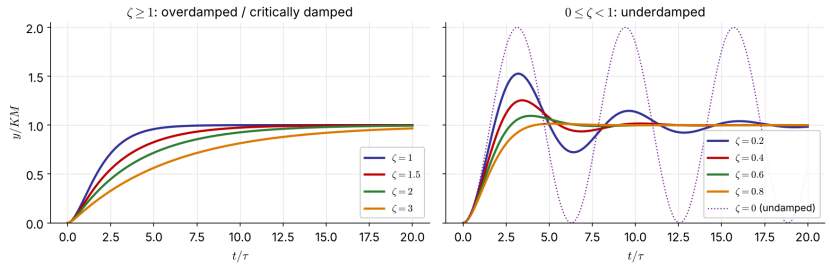

$\zeta > 1$:

$$y = KM\left[1 - e^{-t/\tau}\left(\cosh\frac{\sqrt{\zeta^2-1}}{\tau}t + \frac{\zeta}{\sqrt{\zeta^2-1}}\sinh\frac{\sqrt{\zeta^2-1}}{\tau}t\right)\right]$$

(simpler with e^{-t/τ_1}, e^{-t/τ_2})

$\zeta = 1$: $y = KM\left[1 - \left(1 + \frac{t}{\tau}\right)e^{-t/\tau}\right]$


$0 \leq \zeta < 1$: $y = KM\left[1 - \frac{e^{-\zeta t/\tau}}{\sqrt{1-\zeta^2}}\sin\left(\frac{\sqrt{1-\zeta^2}}{\tau}t + \phi\right)\right]$, $\phi = \tan^{-1}\frac{\sqrt{1-\zeta^2}}{\zeta}$

Rarely used directly; the underdamped one yields the characteristics on the next slide.

서울과학기술대학교

36

Features of the underdamped step response

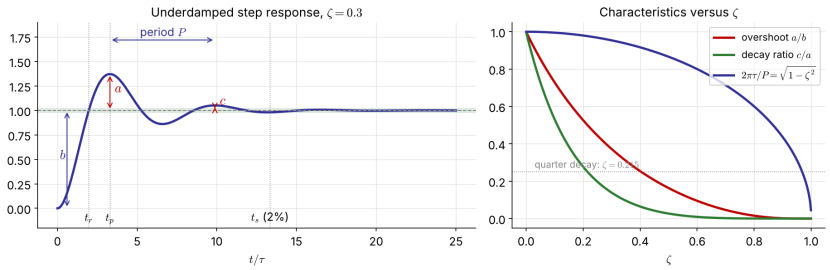

overshoot	peak time	rise time	period	settling time	decay ratio
$\frac{a}{b} = \exp\left(\frac{-\pi\zeta}{\sqrt{1-\zeta^2}}\right)$	$t_p = \frac{\pi\tau}{\sqrt{1-\zeta^2}}$	$t_r = \frac{\tau(\pi - \cos^{-1}\zeta)}{\sqrt{1-\zeta^2}}$	$P = \frac{2\pi\tau}{\sqrt{1-\zeta^2}}$	$t_s \approx \frac{3\tau}{\zeta}$ (5%), $\frac{4\tau}{\zeta}$ (2%)	$\frac{c}{a} = \mathrm{OS}^2$

Settling: the envelope $e^{-\zeta t/\tau}$ behaves like a first-order term with time constant τ/ζ. Smaller ζ: faster rise, larger overshoot, longer settling.

서울과학기술대학교

37

Second-order responses in code

Python

```python
import numpy as np, control as ct, matplotlib.pyplot as plt

t = np.linspace(0, 15, 1501)
for zeta in (0.5, 1.0, 1.5):                  # s^2 + 2 zeta s + 1  (tau = 1)
    G = ct.tf(1, [1, 2*zeta, 1])
    plt.plot(t, ct.step_response(G, t).outputs, label=f'zeta = {zeta}')
plt.legend(); plt.xlabel('t')

info = ct.step_info(ct.tf(1, [1, 0.6, 1]))      # zeta = 0.3
print(info['Overshoot'], info['PeakTime'], info['SettlingTime'])   # 37.2 %, 3.29, ...
```

MATLAB

```matlab
t = 0:0.01:15;
step(tf(1, [1 1 1]), tf(1, [1 2 1]), tf(1, [1 3 1]), t)   % zeta = 0.5, 1, 1.5
legend('\zeta = 0.5', '\zeta = 1', '\zeta = 1.5')

S = stepinfo(tf(1, [1 0.6 1]))                            % zeta = 0.3
% Simulink: Step -> three Transfer Fcn blocks in parallel -> Scope
```

서울과학기술대학교

38

Problem #4 (homework)

a. Show that the overdamped step response can be written with two exponentials e^{-t/τ_1} and e^{-t/τ_2}, and find τ_1, τ_2 in terms of τ and ζ.

b. Starting from the underdamped solution, derive the phase-lag form and $\phi = \tan^{-1}\left(\sqrt{1-\zeta^2}/\zeta\right)$.

c. Derive the overshoot, peak time, rise time, period and decay ratio in the table.

서울과학기술대학교

39

1.7 Processes with Dead Time

서울과학기술대학교

40

Dead time (time delay, transport lag)



Caused by fluid travelling down a pipe or a slow analyzer: 시간지연 / 수송지연.

$$y(t) = x(t - t_d) \quad \Rightarrow \quad \frac{Y(s)}{X(s)} = e^{-t_d s}$$

$$\frac{Ke^{-t_d s}}{\tau s + 1}, \qquad \frac{Ke^{-t_d s}}{\tau^2 s^2 + 2\zeta\tau s + 1}$$

Classical tools work with **polynomials** in s, so we use the **Padé approximation**, a ratio of polynomials that matches the Taylor series of $e^{-t_d s}$:

$$(1/1) \quad e^{-t_d s} \approx \frac{1 - \frac{t_d}{2} s}{1 + \frac{t_d}{2} s}$$

$$(2/2) \quad e^{-t_d s} \approx \frac{t_d^2 s^2 - 6 t_d s + 12}{t_d^2 s^2 + 6 t_d s + 12}$$

Each adds poles in the LHP **and zeros in the RHP**, which produce a small initial **inverse response** instead of a flat delay.

Padé $P_N^M(s) = \sum_0^N a_n s^n / \sum_0^M b_n s^n$, $b_0 = 1$: the $N + M + 1$ coefficients follow from the Taylor coefficients c_n by $a_k = \sum_{j=0}^{k} c_{k-j} b_j$

서울과학기술대학교

41

Example 1.10 Padé approximation of $e^{-3s}/(10s + 1)$


$$\frac{Y}{X} \approx \frac{-1.5s + 1}{(10s + 1)(1.5s + 1)}$$

Python

```python
import numpy as np, control as ct
G = ct.tf(1, [10, 1])
num, den = ct.pade(3, 1)          # 1/1 Pade
P1 = ct.tf(num, den)
t = np.linspace(0, 50, 5001)
y1 = ct.step_response(G*P1, t).outputs
y0 = ct.step_response(G, t).outputs
ye = np.interp(t-3, t, y0, left=0)  # exact
```

MATLAB

```matlab
G  = tf(1, [10 1]);
P1 = tf([-1.5 1], [1.5 1]);   % pade(3,1)
step(G*P1); hold on
step(G*exp(-3*tf('s')))       % exact delay
legend('Pade 1/1', 'exact')
```

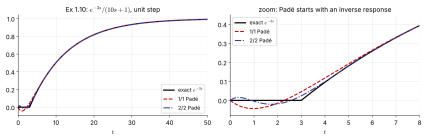

Far from $t = 0$ both approximations are excellent; at early times 1/1 dips to -0.04, and 2/2 wiggles around zero.

서울과학기술대학교

42

Problem #5 (homework)

a. Show that the 1/1 Padé approximation is more accurate than the first-order Taylor expansion $e^{-t_d s} \approx 1 - t_d s$. (Compare the Taylor series of both.)

b. Derive the 2/2 Padé approximation and find its poles and zeros for $t_d = 3$.

서울과학기술대학교


43

1.8 Higher-Order Processes and Approximations

서울과학기술대학교

44


Non-interacting tanks in series

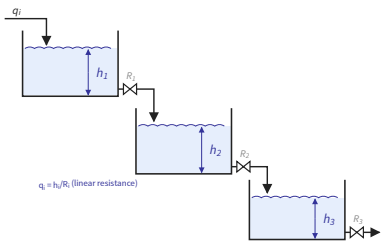

$A_i \frac{dh_i}{dt} = q_{i-1} - q_i,\ q_i = \frac{h_i}{R_i}$ (linear resistance):

$$\frac{H_i(s)}{H_{i-1}(s)} = \frac{K_i}{\tau_i s + 1}, \quad \tau_i = A_i R_i,\ K_i = \frac{R_i}{R_{i-1}}$$

$$\frac{H_n(s)}{Q_1(s)} = \frac{R_n}{(\tau_1 s + 1)\cdots(\tau_n s + 1)}$$

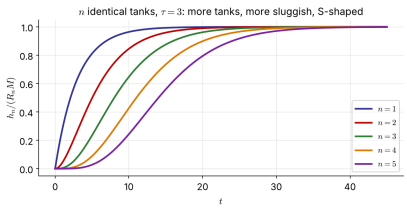

The more tanks, the longer the n-th tank waits to "see" a change: the response looks like a **delay** followed by a lag.

서울과학기술대학교

45

Example 1.11 Low-order approximation with dead time


Keep the **dominant** (large) time constants and lump the small ones into a dead time:

$$G(s) \approx \frac{Ke^{-t_d s}}{(\tau_1 s + 1)(\tau_2 s + 1)}, \quad t_d \approx \sum_{i \neq 1,2} \tau_i$$

$$\frac{Y}{X} = \frac{3}{(0.1s+1)(0.5s+1)(s+1)(3s+1)}$$

- FOPDT: $\frac{3e^{-1.6s}}{3s+1}$
- SOPDT: $\frac{3e^{-0.6s}}{(s+1)(3s+1)}$

Half rule (Skogestad) : split the largest neglected time constant, half to the lag, half to the delay, e.g. $\frac{3e^{-0.35s}}{(1.25s+1)(3s+1)}$.

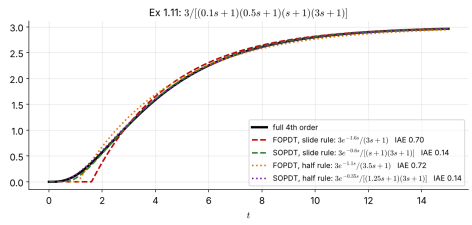


The second-order approximation is clearly better (IAE 0.14 vs 0.70). FOPDT models are the basis of the empirical tuning rules of Ch 3.

서울과학기술대학교

Interacting tanks


46

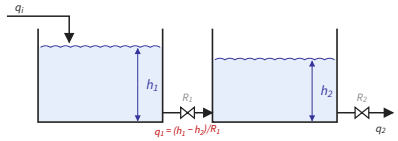

$$A_1\frac{dh_1}{dt} = q_i - \frac{h_1 - h_2}{R_1}, \quad A_2\frac{dh_2}{dt} = \frac{h_1 - h_2}{R_1} - \frac{h_2}{R_2}$$

$$\frac{H_1}{Q_i} = \frac{R_1\tau_2 s + R_1 + R_2}{p(s)}, \quad \frac{H_2}{Q_i} = \frac{R_2}{p(s)}$$

$$p(s) = \tau_1\tau_2 s^2 + \left(\tau_1 + \tau_2 + \tau_1\frac{R_2}{R_1}\right)s + 1$$

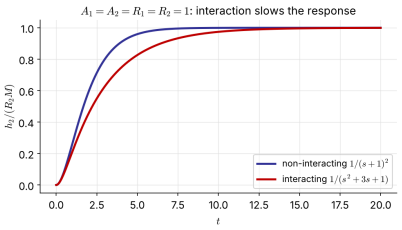

1. Even the first tank is second order (with a zero).
2. Interaction adds $\tau_1 R_2/R_1$ to the middle coefficient; the poles stay **real and negative**.

Which damps inlet-flow disturbances better? The interacting pair: the extra term pushes one pole closer to the origin, so the response is slower and smoother.

서울과학기술대학교

Problem #6 (homework) Blending tank and transfer pipe

47

A nearly perfectly mixed blending tank (first order) feeds a downstream unit through a long transfer pipe. A test shows that the pipe behaves as if its volume were split into **five** equal perfectly stirred tanks in series.

$V_{tank} = 2\ \mathrm{m}^3, \quad V_{pipe} = 0.1\ \mathrm{m}^3, \quad q_{total} = 1\ \mathrm{m}^3/\mathrm{min}$

a. What is the most accurate transfer function $C'_{out}(s)/C'_{in}(s)$ you can develop?

b. What approximate low-order transfer function could represent this process?

c. What do you conclude about the need to model the pipe's mixing accurately?

d. Simulate the approximate and full-order responses to a step change in c_{in}.

서울과학기술대학교

48

1.9 Effect of Zeros

서울과학기술대학교

49


Lead-lag element

Poles govern the inherent dynamics; zeros add finer "fingerprints" by changing the coefficients.

$$\frac{Y}{X} = \frac{\tau_z s + 1}{\tau s + 1} \xrightarrow{X=1/s} Y = \frac{1}{s} + \frac{\tau_z - \tau}{\tau s + 1}$$

$$y(t) = 1 - \left(1 - \frac{\tau_z}{\tau}\right) e^{-t/\tau}, \qquad y(0^+) = \frac{\tau_z}{\tau}$$


- the exponential still comes from the pole $-1/\tau$
- $\tau_z > \tau$: jump above 1, **overshoot**
- $0 < \tau_z < \tau$: jump, then rise
- $\tau_z < 0$ (RHP zero): **inverse response**
- $\tau_z = \tau$: **pole-zero cancellation**, $y = 1$

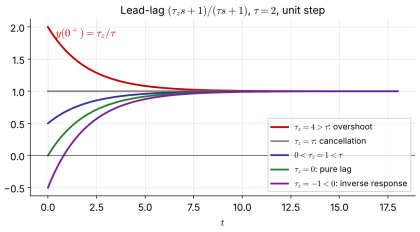

서울과학기술대학교

50

Transfer functions in parallel




With **opposing** effects ($K_2 < 0$), superposition gives a rough picture right away.

The fast element wins first, the large-gain element wins at the end: $\tau_1 \gg \tau_2$ gives $\tau_z < 0$ and an inverse response.

Two competing effects with different time constants:

$$\frac{Y}{X} = \frac{K_1}{\tau_1 s + 1} + \frac{K_2}{\tau_2 s + 1} = \frac{K(\tau_z s + 1)}{(\tau_1 s + 1)(\tau_2 s + 1)}$$

$$K = K_1 + K_2, \quad \tau_z = \frac{K_1\tau_2 + K_2\tau_1}{K_1 + K_2}$$

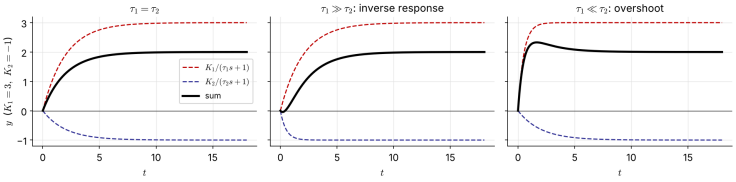

서울과학기술대학교

51

Problem #7 (homework)

$$\frac{Y}{X} = \frac{K(\tau_z s + 1)}{(\tau_1 s + 1)(\tau_2 s + 1)}, \qquad \tau_1 > \tau_2$$

Calculate the response to a step of magnitude M and show that

a. $y(t)$ has an extremum only if $\dfrac{1 - \tau_z/\tau_2}{1 - \tau_z/\tau_1} > 1$;

b. overshoot occurs only for $\tau_z/\tau_1 > 1$;


c. inverse response occurs only for $\tau_z < 0$;

d. if an extremum exists, find the time at which it occurs.

서울과학기술대학교

Interactive: poles, zeros, dead time

52

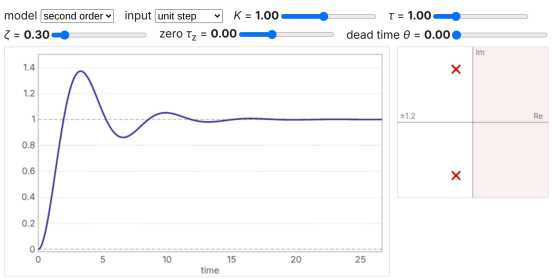

poles: **-0.300 + 0.954j, -0.300 − 0.954j**
zero: **none**
final value K = **1.00**
overshoot **37.2%** at t = **3.29**
theory: OS = **37.2%**, DR = **0.139**
2% settling time **11.23**
$G(s) = K(\tau_z s+1)e^{-\theta s}/(\tau s+1)$ or $/(\tau^2 s^2+2\zeta\tau s+1)$

Interactive version: seoultechpse.github.io/ProCon/ch1/ch1_dynamics.html — first or second order, K, τ, ζ, zero τ_z, dead time θ.

서울과학기술대학교

Summary

53

Tools

- deviation variables → zero initial conditions
- linearize about the operating point
- Laplace transform + table; final value only if stable
- partial fractions: one term per pole
- $G(s) = Q(s)/P(s)$, gain $K = G(0)$

Responses

- first order: τ (63.2%), K; integrator K_I/s
- second order: ζ sets over/critical/under damping; OS, DR = OS^2, $t_s \approx 4\tau/\zeta$
- dead time $e^{-t_d s}$ → Padé; high order → FOPDT/SOPDT
- zeros: overshoot, inverse response (RHP zero)

Next (Ch 2): close the loop with a controller and see how K_c, τ_I, τ_D move these poles.

서울과학기술대학교

Resources

54

- **Slides (interactive HTML):** seoultechpse.github.io/ProCon/ch1/ch1_dynamics.html
- **PDF:** slides · handout with note space
- **Python notebook:** Open in Colab — every transform (sympy), calculation and figure of this chapter
- **Response explorer:** standalone page

서울과학기술대학교