

台灣代理聯絡方式

Taiwan Agent Contacts & Address

鈞成興業有限公司

BEST SUCCESS INDUSTRIAL CO., LTD.



聯絡人
Contact 馮延祺

手機
Mobile 0930-801-651

電話
Tel 04-2332-6437

傳真
Fax 04-2332-6438

Email lili8482@ms27.hinet.net

LINE ID @623cvegw

地址
Address 台中市烏日區溪南路一段 680 巷 409 弄 19-8 號

營業時間
Hours 週一至週五 9:00-17:00
國定假日請參考 Google 地圖上的營業時間

統一編號
Tax ID 54593206

網站
Website best-success-industrial-co-ltd.github.io



LINE 官方帳號
掃描加入好友詢問



官方網站
產品資訊與聯絡方式

產品性質與適用範圍說明僅供參考，不保證產品屬性；供貨範圍及服務以合約條款為準。技術資料與插圖僅作為供貨參考，保留變更權利。
本型錄由原廠廣東拓斯達科技股份有限公司提供，台灣地區由鈞成興業有限公司代理。



股票代码 Stock Code 300607

温控系列辅机

模温机 | 冷水机

Temperature control series auxiliary equipment
Mold temperature machine | Chiller

解决注塑生产的温控问题、提高产品良率，面向精密注塑，功能不断进化。满足行业客户智能化、数字化升级的需求
Solving temperature control issues in injection molding production and improving product quality, Topstar continuously evolves its functionality for precision injection molding. We are committed to meeting industry customers' needs for intelligent and digital transformation.



TTWPseries

标准版Standard Version

传热媒体（水）
最高使用温度120℃
Heat transfer media (water)
Maximum use temperature 120℃

更高精度

- Higher Precision
- 温度表示单位0.1℃，带PID自调节功能。
 - The temperature is in 0.1℃, with PID self-adjustment function.

更智能

- More Intelligent
- 7寸触摸屏，显示直观，操作简便；
 - 设备运行状态日志与报警日志；
 - 支持提前一周预约开关机；
 - RS485通讯接口，支持MODBUS RTU通讯协议。
 - 7" touch screen with intuitive display and easy operation;
 - Equipment operation status log and alarm log;
 - Support for appointment switching of one week in advance;
 - RS485 communication interface, supporting MODBUS RTU communication protocol.

更安全可靠的性能

- More Safe And Reliable Performance
- 系统回路超温脱扣保护，控制回路短路过热保护；
 - 泵浦逆相、欠相、过载检测；
 - 双回路温度检测，能有效监测模具是否堵塞。
 - Over-temperature decoupling protection of the system circuit and short-circuit fuse protection of the control circuit;
 - Pump anti-phase, under-phase, overload detection;
 - Double-loop temperature detection, which can effectively monitor whether the mold is clogged.


更合理的结构

- More Rational Structural Design
- 结构精巧设计，提升空间利用率；
 - 巧妙的散热通道设计，有效保护电气元件；
 - 模块化结构设计和抗腐蚀材质。
 - Delicate design of structure to enhance space utilization;
 - Ingenious design of heat dissipation channels to effectively protect electrical components;
 - Modular design and corrosion-resistant material for the whole machine.

拓星链应用平台

Top Star Chain Application Platform

- 实时远程监控，设备运行数据统计、分析及寿命管理。
- Real-time remote monitoring, centralized equipment management: data statistics, analysis and machine life management are available.

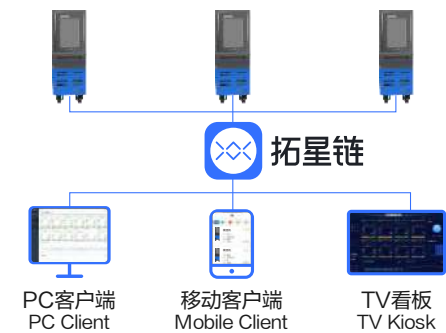


TTWP-1210D

TTWP-1210

外型尺寸图Dimensions

单位/Unit : mm

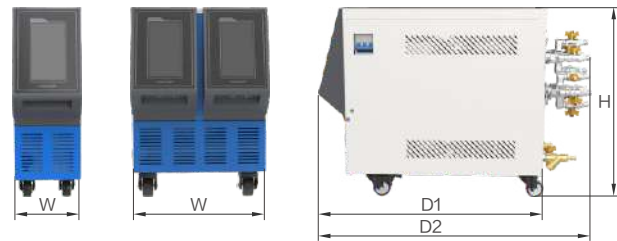

型号 Model	W	D1	D2	H
TTWP-1210	185	635	770	540
TTWP-1220	325	720	860	670
TTWP-1230	325	720	860	670
TTWP-122024	325	855	1010	725
TTWP-123024	325	855	1010	725
TTWP-1250	325	855	1010	725
TTWP-125036	325	915	1060	825
TTWP-1210D	390	640	775	565
TTWP-1220D	595	720	865	690
TTWP-1230D	595	720	865	690
TTWP-123024D	595	890	1055	735

注1：选配清模功能尺寸会变化，非标机型尺寸另行通知。
Note 1: The size of the optional mold clearing function will change, and the size of non-standard models will be notified.

规格Specification

型号 Model		TTWP-1210	TTWP-1220	TTWP-122024	TTWP-1230	TTWP-123024	TTWP-1250	TTWP-125036	TTWP-1210D	TTWP-1220D	TTWP-1230D	TTWP-123024D										
传热媒体 Heat transfer media		清水 执行标准: GB1576 (工业锅炉水质) Clear water Implementation standard: GB1576 (industrial boiler water quality)																				
使用温度 Operating temperature(℃)		冷却水温度+20℃ ~ 120℃ Cooling water temperature +20℃ ~ 120℃																				
控制方式 Control method		7寸触摸屏/PID控制 7 "touch screen /PID control																				
冷却能力 Cooling capacity(kw)(Note 2)		15.3	18.2	18	22.3	22.3	24.5	24.5	15.3+15.3	18.2+18.2	22.3+22.3	22.3+22.3										
加热器 Heater	加热功率 Heating power(kVV)	8	12	12×2	12	12×2	12×2	12×3	8+8	12+12	12+12	12×2+12×2										
	驱动方式 Drive method	SSR控制 SSR control																				
泵浦功率 Pump power(kw)		0.75	1.5		2.8		4		0.75+0.75		1.5+1.5	2.8+2.8										
泵浦形式 Pump form		立式机械轴封泵 Vertical mechanical shaft seal pump	卧式机械轴封泵 Horizontal mechanical shaft seal pump						立式机械轴封泵 Vertical mechanical shaft seal pump	卧式机械轴封泵 Horizontal mechanical shaft seal pump												
媒体泵 Media Pumps	最大流量 Maximum fow rate(L/min)	58	85		107		120		58	85	107											
	最大压力 Max. pressure(Mpa)	0.44	0.69		0.79		0.79		0.44	0.69	0.79											
流量 Flow rate(L/min)		45	30	19	65	42	20	80	53	25	105	60	20	45	30	19	65	42	20	80	53	25
全扬程 Full head(m)		10	22	30	17	35	52	21	40	61	10	40	66	10	22	30	17	35	52	21	40	61
出回媒管径 Outlet and return pipe diameter		DN25																				
分流器配置 Diverter configuration		4进4出 3/8" 力古 4 in 4 out 3/8 "Rigo				6进6出 3/8" 力古 6 in 6 out 3/8 "Rigo				1进1出 1" 力古 1 in 1 out 1 "Rigo				4进4出+4进4出 3/8" 力古 4 in 4 out+4 in 4 out 3/8 "Rigo				6进6出+6进6出 3/8" 力古 6 in 6 out+6 in 6 out 3/8 "Rigo				
冷却进出水管径 Cooling inlet and outlet pipe diameter		φ 12宝塔水咀 φ 12 pagoda water Tsui																				
冷却系统 Cooling System	冷却方式 Cooling mode	直接冷却 Direct cooling																				
	冷却进出水压差 Cooling inlet and outlet pressure difference (Mpa)	≥0.05																				
	冷却压力 Cooling pressure(Mpa)	使用小于100℃时，确保进水压力在0.05 ~ 0.5；使用大于100℃时，确保进水压力在0.2 ~ 0.5 When using less than 100℃, ensure that the inlet pressure is between 0.05 and 0.5; When the temperature is greater than 100 ℃, ensure that the inlet water pressure is between 0.2 and 0.5																				
电 Electricity	用电规格 Electricity specification	AC380V 3P/PE 50Hz																				
	主断路器容量 Main circuit breaker capacity(A)	32		63		32	63	63	100	63		63	125									
	总电气容量 Total electrical capacity(kW)	8.9	13.7	25.7	15	27	28.2	40.2	17.9	27.4	30	54										
	电源线 Power cord(5m long)	4×4.0mm ²	4×6.0mm ²	4×10.0mm ²	4×6.0mm ²	4×10.0mm ²	4×10.0mm ²	4×16.0mm ²	4×6.0mm ²	4×10.0mm ²	4×10.0mm ²	4×25.0mm ²										
保护功能 Protection function		电源逆相/电源缺相/水泵过电流/加热器超温/媒体温度异常/温度探头断线/整机负荷保护/控制回路保护/进水压力低 Power reverse phase/Power lack phase/water pump overcurrent/heater overtemperature/abnormal media temperature/temperature probe disconnected/machine load protection/control loop protection/low water inlet pressure																				
机箱颜色 Case color		SPCC白色烤漆 (RAL7047)、SPCC蓝色烤漆 (RAL5012)、SUS SPCC white baking paint (RAL7047), SPCC blue baking paint (RAL5012), SUS																				
产品净重 Product net weight (kg)		50	70	90	75	100	105	125	90	125	140	180										

注2：冷却能力：冷却进水大于出水0.1Mpa，冷却水温10℃，△t=60℃ Note 2: Cooling capacity: cooling inlet greater than outlet 0.1Mpa, cooling temperature 10℃, △t=60℃

配置表 Configuration Table

型号 Model	TTWP-1210	TTWP-1220	TTWP-122024	TTWP-1230	TTWP-123024	TTWP-1250	TTWP-125036	TTWP-1210D	TTWP-1220D	TTWP-1230D	TTWP-123024D
3P 380V 50HZ											
3P 380V 60HZ	○	○	○	○	○	○	○	○	○	○	○
3P 415V 50HZ	○	○	○	○	○	○	○	○	○	○	○
3P 440V 60HZ	○	○	○	○	○	○	○	○	○	○	○
3P 480V 60HZ	○	○	○	○	○	○	○	○	○	○	○
清模功能 Mold cleaning function	○	○	○	○	○	○	○	○	○	○	○
漏电保护 Leakage protection	○	○	○	○	○	○	○	○	○	○	○
精密水质过滤器 Precision water filter	○	○	○	○	○	○	○	○	○	○	○
屏幕防护罩 Screen protection cover	○	○	○	○	○	○	○	○	○	○	○
分流器1进1出 Diverter 1 in and 1 out	○	○	○	○	○	●	●	○	○	○	○
分流器4进4出 Diverter 4 in and 4 out	●	●	●	—	—	—	—	●	●	—	—
分流器6进6出 Diverter 6 in and 6 out	○	○	○	●	●	—	—	○	○	●	●
分流器8进8出 Diverter 8 in and 8 out	—	○	○	○	○	○	○	—	○	○	○

注3：标配功能“●”、选配功能“○”和“—”表示无。 Note 3: Standard function "●", optional function "○" and "—" indicates none.

TTWP series
间接加热标准版
Indirect Heating Standard Edition



外型尺寸图 Dimensions

单位/Unit : mm



型号 Model	W	D1	D2	H
TTWP-1210N	305	700	945	645
TTWP-1220N	305	835	1080	670
TTWP-122024N	305	835	1100	845
TTWP-1230N	305	835	1080	670
TTWP-123024N	305	835	1100	845

Note 1: The size of the optional mold clearing function will change, and the size of non-standard models will be notified.

**传热媒体（水）
最高使用温度120℃**

Heat transfer media (water)
Maximum use temperature 120°C

更高精度

Higher Precision

- 温度表示单位0.1℃，带PID自调节功能。
- The temperature is in 0.1℃, with PID self-adjustment function.

更智能

More Intelligent

- 7寸触摸屏，显示直观，操作简便；
 - 设备运行状态日志与报警日志；
 - 支持提前一周预约开关机；
 - RS485通讯接口，支持MODBUS RTU通讯协议。
- 7" touch screen with intuitive display and easy operation.
 - Equipment operation status log and alarm log.
 - Support for appointment switching of one week in advance.
 - RS485 communication interface, supporting MODBUS RTU communication protocol.

更安全可靠的性能

More Safe And Reliable Performance

- 系统回路超温脱扣保护，控制回路短路过热保护；
- 泵浦逆相、欠相、过载、超温检测；
- 双回路温度检测，能有效监测模具是否堵塞。
- Over-temperature decoupling protection of the system circuit and short-circuit fuse protection of the control circuit.
- Pump anti-phase, under-phase, overload and over-temperature detection.
- Double-loop temperature detection, which can effectively monitor whether the mold is clogged.

更合理的结构

More Rational Structural Design

- 结构精巧设计，提高空间利用率。
 - 发热元件外置，有效提高元件使用寿命；
 - 加热管道逐级加热，加热速度更快；
 - 巧妙的散热通道设计，有效保护电气元件。
-
- Delicate design of structure to enhance space utilization.
 - Ingenious design of heat dissipation channels to effectively protect electrical components.
 - Modular design and corrosion-resistant material for the whole machine.
 - Clever heat dissipation channel design effectively protects electrical components.

拓星链应用平台

Top Star Chain Application Platform

- 实时远程监控，设备运行数据统计、分析及寿命管理。
- Real-time remote monitoring, centralized equipment management: data statistics, analysis and machine life management are available.

规格 Specification

型号 Model		TTWP-1210N			TTWP-1220N		TTWP-122024N		TTWP-1230N		TTWP-123024N		
传热媒体 Heat transfer media		清水 执行标准: GB1576 (工业锅炉水质) Clear water Implementation standard: GB1576 (industrial boiler water quality)											
使用温度 Operating temperature(℃)		冷却水温度+20℃ ~ 120℃ Cooling water temperature +20℃ ~ 120℃											
控制方式 Control method		7寸触摸屏/PID控制 7 "touch screen /PID control											
冷却能力 (注) Cooling capacity(kW) (Note)		15.3			18.2		18		22.3		22.3		
加热器 Heater	加热功率 Heating power(kW)	8			12		12x2		12		12x2		
	加热方式 Heating method	间接加热 Indirect heat											
	驱动方式 Drive method	SSR控制 SSR control											
媒体泵 Media Pumps	泵浦功率 Pump power(kW)	0.75			1.5				2.8				
	泵浦形式 Pump form	立式机械轴封泵 Vertical mechanical shaft seal pump			卧式机械轴封泵 Horizontal mechanical shaft seal pump								
	最大流量 Maximum flow rate (L/min)	58			85				107				
	最大压力 Max. pressure (Mpa)	0.44			0.69				0.79				
	流量 Flow rate(L/min)	45	30	19	65	42	20	80	53	25			
	全扬程 Full head (m)	10	22	30	17	35	52	21	40	61			
循环系统 Circulation System	出回煤管径 Outlet and return pipe diameter	DN25											
	分流器配置 Diverter configuration	4进4出 3/8" 力古 4 in 4 out 3/8 "Rigo							6进6出 3/8" 力古 6 in 6 out 3/8 "Rigo				
冷却系统 Cooling System	冷却进出水管径 Cooling inlet and outlet pipe diameter	φ 12宝塔水咀 φ 12 pagoda water Tsui											
	冷却方式 Cooling mode	直接冷却 Direct cooling											
	冷却进出水压差 Cooling inlet and outlet pressure difference (Mpa)	≥0.05											
	冷却压力 Cooling pressure (Mpa)	使用小于100℃时, 确保进水压力在0.05~0.5; 使用大于100℃时, 确保进水压力在0.2~0.5 When using less than 100℃, ensure that the inlet pressure is between 0.05 and 0.5; When the temperature is greater than 100 ℃, ensure that the inlet water pressure is between 0.2 and 0.5											
电 Electricity	用电规格 Electricity specification	AC380V 3P/PE 50Hz											
	主断路器容量 Main circuit breaker capacity (A)	32				63				32		63	
	总电气容量 Total electrical capacity (kW)	8.9			13.7		25.7		15		27		
	电源线 Power cord (5m long)	4 × 4.0mm			4 × 6.0mm		4 × 10.0mm		4 × 6.0mm		4 × 10.0mm ²		
	保护功能 Protection function	电源逆相/电源缺相/水泵过电流/加热器超温/媒体温度异常/温度探头断线/整机负荷保护/控制回路保护/进水压力低 Reverse phase of power supply/phase loss of power supply/overcurrent of water pump/overtemperature of heater/abnormal temperature of media/disconnection of temperature probe/ load protection of the whole machine/control circuit protection/low water inlet pressure											
机箱颜色 Case color		SPCC白色烤漆 (RAL7047) 、SPCC蓝色烤漆 (RAL5012) 、SUS SPCC white baking paint (RAL7047), SPCC blue baking paint (RAL5012), SUS											
产品净重 Product net weight (kg)		70			80		100		90		110		

注2: 冷却能力: 冷却进水大于出水0.1Mpa, 冷却水温10℃, $\Delta t=60^{\circ}\text{C}$ Note 2: Cooling capacity: cooling inlet greater than outlet 0.1Mpa, cooling temperature 10℃, $\Delta t=60^{\circ}\text{C}$

配置表 Configuration Table

型号 Model	TTWP-1210N	TTWP-1220N	TTWP-122024N	TTWP-1230N	TTWP-123024N
3P 380V 50HZ	●	●	●	●	●
3P 380V 60HZ	○	○	○	○	○
3P 415V 50HZ	○	○	○	○	○
3P 440V 60HZ	○	○	○	○	○
3P 480V 60HZ	○	○	○	○	○
清模功能 Mold cleaning function	○	○	○	○	○
漏电保护 Leakage protection	○	○	○	○	○
精密水质过滤器 Precision water filter	○	○	○	○	○
屏幕防护罩 Screen protection cover	○	○	○	○	○
分流器1进1出 Diverter 1 in and 1 out	○	○	○	○	○
分流器4进4出 Diverter 4 in and 4 out	●	●	●	—	—
分流器6进6出 Diverter 6 in and 6 out	○	○	○	●	●
分流器8进8出 Diverter 8 in and 8 out	—	○	○	○	○

注3: 标配功能“●”、选配功能“○”和“-”表示无。 Note 3: Standard function "●", optional function "○" and "-" indicates none.


TTWPseries

大流量标准版

Pure water standard version



外型尺寸图 Dimensions 单位/Unit : mm

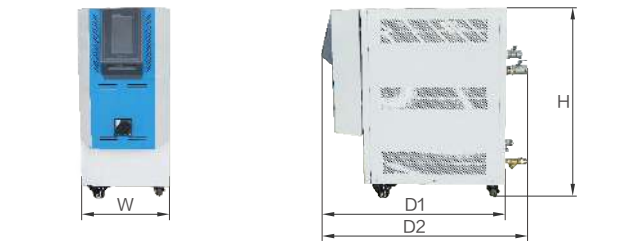

型号 Model	W	D1	D2	H
TTWP-123012F	450	975	1150	840
TTWP-123024F	450	975	1150	910
TTWP-123036F	450	975	1150	910
TTWP-125024F	450	975	1150	1010
TTWP-125036F	450	975	1150	1010
TTWP-125048F	450	1065	1250	1010
TTWP-123024FP	455	1065	1250	1000
TTWP-125036FP	455	1065	1250	1150
TTWP-125048FP	455	1065	1250	1150

注1: 选配清模功能尺寸会变化, 非标机型尺寸另行通知。
Note 1: The size of the optional mold clearing function will change, and the size of non-standard models will be notified.

传热媒体 (水/纯水)
最高使用温度120℃
大流量泵
Heat transfer media (water/pure water)
Maximum use temperature 120℃
Large-flow pump

更高精度

Higher Precision

- 温度表示单位0.1℃，带PID自调节功能。
- The temperature is in 0.1℃, with PID self-adjustment function.

更智能

More Intelligent

- 7寸触摸屏，显示直观，操作简便；
- 设备运行状态日志与报警日志；
- 支持提前一周预约开关机；
- RS485通讯接口，支持MODBUS RTU通讯协议。
- 7" touch screen with intuitive display and easy operation;
- Equipment operation status log and alarm log;
- Support for appointment switching of one week in advance;
- RS485 communication interface, supporting MODBUS RTU communication protocol.

更安全可靠的性能

More Safe And Reliable Performance

- 更大流量、更高压力的多级立式泵浦，更迅速地稳定模具温度。
- 系统回路超温脱扣保护，控制回路短路过热保护；
- 泵浦逆相、欠相、过载检测；
- 双回路温度检测，能有效监测模具是否堵塞。
- Vertical multistage centrifugal pump,large-flow and high-pressure,stabilize the mold temperature more quickly;
- Over-temperature decoupling protection of the system circuit and short-circuitfuse protection of the control circuit;
- Pump anti-phase, under-phase, overload detection;
- Double-loop temperature detection, which can effectively monitor whether the mold is blocked.

更合理的结构


More Rational Structural Design

- 合理的管路设计，提供了更稳定的出水流量和压力；
- 电箱分离结构，有效保护电气元件；
- 模块化结构设计和抗腐蚀材质。
- Rational pipeline design,provides more stable outlet flow and pressure;
- Electric control box separation structure,to effectively protect electrical components;
- Modular design and corrosion-resistant material for the whole machine.

拓星链应用平台

Top Star Chain Application Platform

- 实时远程监控，设备运行数据统计、分析及寿命管理。
- Real-time remote monitoring, centralized equipment management: data statistics, analysis and machine life management are available.

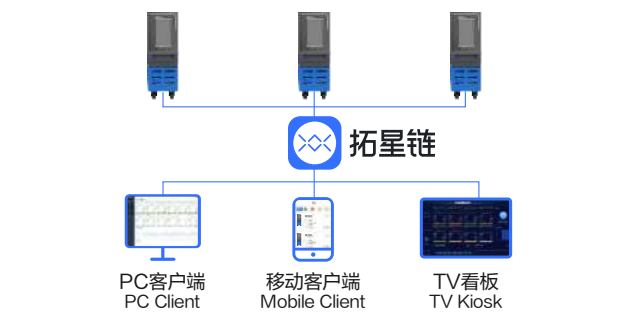

规格 Specification

型号 Model		TTWP-123012F	TTWP-123024F	TTWP-123036F	TTWP-125024F	TTWP-125036F	TTWP-125048F	TTWP-123024FP	TTWP-125036FP	TTWP-125048FP
	传热媒体 Heat transfer media	清水 执行标准：GB1576 (工业锅炉水质) Clear water Implementation standard: GB1576 (industrial boiler water quality)						纯水 pure water		
	使用温度 Operating temperature(℃)	冷却水温度+10℃ ~ 120℃ Cooling water temperature +10℃ ~ 120℃								
	控制方式 Control method	7寸触摸屏/PID控制 7 "touch screen /PID control								
	冷却能力 (注) Cooling capacity(kW) (Note)	20			38.9			24		
加热器 Heater	加热功率 Heating power(kW)	12	12×2	12×3	12×2	12×3	12×3	12×2	12x3	12×3
	驱动方式 Drive method	SSR控制 SSR control								
媒体泵 Media Pumps	泵浦功率 Pump power(kW)	2.2			4			2.2	4	
	泵浦形式 Pump form	轻型立式多级离心泵 Light vertical multistage centrifugal pump								
	最大流量 Maximum flow rate (L/min)	266			366			266	366	
	最大压力 Max. pressure (Mpa)	0.35			0.52			0.35	0.52	
	流量 Flow rate(L/min)	166	200	233	200	250	300	166 200 233	200	250 300
	全扬程 Full head (m)	33	30	26	49	45	40	33 30 26	49	45 40
循环系统 Circulation System	出回煤管径 Outlet and return pipe diameter	DN40								
	分流器配置 Diverter configuration	1进1出 1.5" 力古 1 in 1 out 1.5 "Rigo								
冷却系统 Cooling System	冷却进出水管径 Cooling inlet and outlet pipe diameter	DN20						DN15		
	冷却方式 Cooling mode	直接冷却 Direct cooling						间接冷却 Indirect cooling		
	冷却进出水压差 Cooling inlet and outlet pressure difference (Mpa)	≥0.05								
	冷却压力 Cooling pressure (Mpa)	使用小于100℃时，确保进水压力在0.05~0.5；使用大于100℃时，确保进水压力在0.2~0.5 When using less than 100℃, ensure that the inlet pressure is between 0.05 and 0.5; When the temperature is greater than 100 °C, ensure that the inlet water pressure is between 0.2 and 0.5						0.05~0.5 (进水压力大于出水压力) 0.05~0.5 (inlet pressure greater than outlet pressure)		
电 Electricity	用电规格 Electricity specification	AC380V 3P/PE 50Hz								
	主断路器容量 Main circuit breaker capacity (A)	32	63	100	63	100		63	100	
	总电气容量 Total electrical capacity (kW)	14.4	26.4	38.4	28.2	40.2	52.2	26.4	40.2	52.2
	电源线 Power cord (5m long)	4×6.0mm ²	4×10.0mm ²	4×16.0mm ²	4×10.0mm ²	4×16.0mm ²	4×25.0mm ²	4×10.0mm ²	4×16.0mm ²	4×25.0mm ²
	保护功能 Protection function	电源逆相/电源缺相/水泵过电流/加热器超温/媒体温度异常/温度探头断线/整机负荷保护/控制回路保护/进水压力低 Power reverse phase/Power lack phase/water pump overcurrent/heater overtemperature/abnormal media temperature/temperature probe disconnected/machine load protection/control loop protection/low water inlet pressure								
	机箱颜色 Case color	SPCC白色烤漆 (RAL7047) 、SPCC蓝色烤漆 (RAL5012) SPCC white baking paint (RAL7047), SPCC blue baking paint (RAL5012)								
	产品净重 Product net weight (kg)	120	145	170	180	205	230	170	230	255

注2: 冷却能力: 冷却进水大于出水0.1Mpa, 冷却水温10℃, △t=60℃ Note 2: Cooling capacity: cooling inlet greater than outlet 0.1Mpa, cooling temperature 10℃, △t=60℃

配置表 Configuration Table

型号 Model	TTWP-123012F	TTWP-123024F	TTWP-123036F	TTWP-125024F	TTWP-125036F	TTWP-125048F	TTWP-123024FP	TTWP-125036FP	TTWP-125048FP
3P 380V 50HZ	●	●	●	●	●	●	●	●	●
3P 380V 60HZ	○	○	○	○	○	○	○	○	○
3P 415V 50HZ	○	○	○	○	○	○	○	○	○
3P 440V 60HZ	○	○	○	○	○	○	○	○	○
3P 480V 60HZ	○	○	○	○	○	○	○	○	○
清模功能 Mold cleaning function	○	○	○	○	○	○	○	○	○
漏电保护 Leakage protection	○	○	○	○	○	○	○	○	○
精密水质过滤器 Precision water filter	○	○	○	○	○	○	○	○	○
屏幕防护罩 Screen protection cover	○	○	○	○	○	○	-	-	-
分流器1进1出 Diverter 1 in and 1 out	●	●	●	●	●	●	●	●	●
分流器6进6出 Diverter 6 in and 6 out	○	○	○	○	○	○	○	○	○
分流器8进8出 Diverter 8 in and 8 out	○	○	○	○	○	○	○	○	○

注3: 标配功能 “●”、选配功能 “○” 和 “-” 表示无。 Note 3: Standard function "●", optional function "○" and "-" indicates none.

TTWPseries

标准版Standard Version

传热媒体（水）
最高使用温度160℃
Heat transfer media (water)
Maximum use temperature 160℃

更高精度

Higher Precision

- 温度表示单位0.1℃，带PID自调节功能。
- The temperature is in 0.1℃, with PID self-adjustment function.

更智能

More Intelligent

- 7寸触摸屏，显示直观，操作简便；
- 设备运行状态日志与报警日志；
- 支持提前一周预约开关机；
- RS485通讯接口，支持MODBUS RTU通讯协议。
- 7" touch screen with intuitive display and easy operation;
- Equipment operation status log and alarm log;
- Support for appointment switching of one week in advance;
- RS485 communication interface, supporting MODBUS RTU communication protocol.

更安全可靠的性能

More Safe And Reliable Performance

- 可靠的液位检测方式，适用不同水质工况；
- 系统压力实时监控；
- 系统超温、电气超温保护。
- Reliable liquid level detection method, suitable for different water quality Industrial conditions;
- System pressure real-time monitoring;
- System over-temperature and electrical over-temperature protection.

更合理的结构


More Rational Structural Design

- 结构精巧设计，提升空间利用率；
- 巧妙的散热通道设计，有效保护电气元件；
- 模块化结构设计和抗腐蚀材质。
- Delicate design of structure to enhance space utilization;
- Ingenious design of heat dissipation channels to effectively protect electrical components;
- Modular design and corrosion-resistant material for the whole machine.

拓星链应用平台

Top Star Chain Application Platform

- 实时远程监控，设备运行数据统计、分析及寿命管理。
- Real-time remote monitoring, centralized equipment management: data statistics, analysis and machine life management are available.

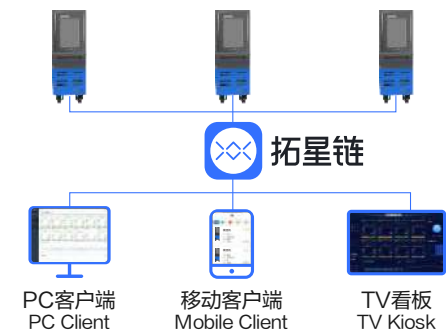


TTWP-1610D

TTWP-1610

外型尺寸图Dimensions

单位/Unit : mm

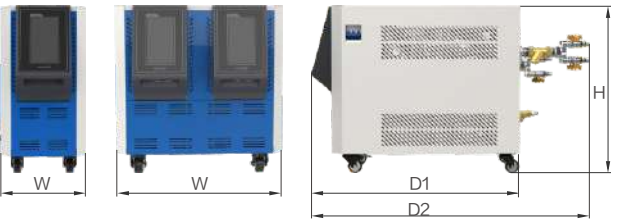

型号 Model	W	D1	D2	H
TTWP-1610	305	725	980	585
TTWP-1620	325	725	980	680
TTWP-162024	325	855	1120	730
TTWP-1630	345	790	1045	680
TTWP-163024	325	855	1120	730
TTWP-1610D	595	725	980	605
TTWP-1620D	595	725	980	680
TTWP-163024D	595	860	1130	740

注1：选配清模功能尺寸会变化，非标机型尺寸另行通知。
Note 1: The size of the optional mold clearing function will change, and the size of non-standard models will be notified.

规格Specification

型号 Model	TTWP-1610			TTWP-1620			TTWP-162024			TTWP-1630			TTWP-163024			TTWP-1610D			TTWP-1620D			TTWP-163024D			
传热媒体 Heat transfer media	清水 执行标准: GB1576 (工业锅炉水质) Clear water Implementation standard: GB1576 (industrial boiler water quality)																								
使用温度 Operating temperature(℃)	冷却水温度+20℃ ~ 160℃ Cooling water temperature +20℃ ~ 160℃																								
控制方式 Control method	7寸触摸屏/PID控制 7 "touch screen /PID control																								
冷却能力 Cooling capacity(kW)(Note 2)	12.7			12.9			12.9			12			12			12.7+12.7			12.9+12.9			12+12			
加热器 Heater	加热功率 Heating power(kW)	8			12			12×2			12			12×2			8+8			12+12			12x2+12x2		
	驱动方式 Drive method	SSR控制 SSR control																							
泵浦功率 Pump power(kW)	0.75			1.5						2.8						0.75+0.75			1.5+1.5			2.8+2.8			
泵浦形式 Pump form	卧式机械轴封泵 Horizontal mechanical shaft seal pump																								
媒体泵 Media Pumps	最大流量 Maximum flow rate (L/min)	55			85						107						55			85			107		
	最大压力 Max. pressure (Mpa)	0.44			0.69						0.79						0.44			0.69			0.79		
	流量 Flow rate(L/min)	45	27	13	65	42	20	80	53	25	45	27	13	65	42	20	80	53	25						
	全扬程 Full head (m)	10	23	35	17	35	52	21	40	61	10	23	35	17	35	52	21	40	61						
循环系统 Circulation System	出回煤管径 Outlet and return pipe diameter	DN25																							
	分流器配置 Diverter configuration	4进4出 3/8" 力古 4 in 4 out 3/8 "Rigo						6进6出 3/8" 力古 6 in 6 out 3/8 "Rigo						4进4出+4进4出 3/8" 力古 4 in 4 out +4 in 4 out 3/8 "Rigo						6进6出+6进6出 3/8"力古 6 in 6 out +6 in 6 out 3/8 "Rigo					
冷却系统 Cooling System	冷却进出水管径 Cooling inlet and outlet pipe diameter	φ 12宝塔水咀 φ 12 pagoda water Tsui																							
	冷却方式 Cooling mode	间接冷却 Indirect cooling																							
	冷却进出水压差 Cooling inlet and outlet pressure difference (Mpa)	≥0.05																							
	冷却压力 Cooling pressure (Mpa)	0.05-0.5 (进水压力大于出水压力) 0.05-0.5 (inlet pressure greater than outlet pressure)																							
电 Electricity	用电规格 Electricity specification	AC380V 3P/PE 50Hz																							
	主断路器容量 Main circuit breaker capacity (A)	32			63			32						63						125					
	总电气容量 Total electrical capacity (kW)	8.9			13.7			25.7			15			27			17.9			27.4			54		
	电源线 Power cord (5m long)	4×4.0mm ²			4×6.0mm ²			4×10.0mm ²			4×6.0mm ²			4×10.0mm ²			4×6.0mm ²			4×10.0mm ²			4×25.0mm ²		
保护功能 Protection function		电源逆相/电源缺相/水泵过电流/加热器超温/媒体温度异常/温度探头断线/整机负荷保护/控制回路保护/ 系统压力低保护/系统压力高保护/系统压力高机械保护/系统液位低保护 Power supply reverse phase/power supply lack phase/water pump overcurrent/heater overtemperature/ media temperature anomaly/temperature probe disconnected/machine load protection/control loop protection / high system pressure protection/high system pressure mechanical protection/low system liquid level protection																							
机箱颜色 Case color		SPCC白色烤漆 (RAL7047)、SPCC蓝色烤漆 (RAL5012)、SUS SPCC white baking paint (RAL7047), SPCC blue baking paint (RAL5012), SUS																							
产品净重 Product net weight (kg)		60			70			90			80			95			120			140			190		

注2：冷却能力：冷却进水大于出水0.1Mpa，冷却水温10℃，△t=60℃ Note 2: Cooling capacity: cooling inlet greater than outlet 0.1Mpa, cooling temperature 10℃, △t=60℃

配置表Configuration Table

型号 Model	TTWP-1610	TTWP-1620	TTWP-162024	TTWP-1630	TTWP-163024	TTWP-1610D	TTWP-1620D	TTWP-163024D
3P 380V 50HZ	●	●	●	●	●	●	●	●
3P 380V 60HZ	○	○	○	○	○	○	○	○
3P 415V 50HZ	○	○	○	○	○	○	○	○
3P 440V 60HZ	○	○	○	○	○	○	○	○
3P 480V 60HZ	○	○	○	○	○	○	○	○
清模功能 Mold cleaning function	○	○	○	○	○	○	○	○
漏电保护 Leakage protection	○	○	○	○	○	○	○	○
精密水质过滤器 Precision water filter	○	○	○	○	○	○	○	○
屏幕防护罩 Screen protection cover	○	○	○	○	○	○	○	○
分流器1进1出 Diverter 1 in and 1 out	○	○	○	○	○	○	○	○
分流器4进4出 Diverter 4 in and 4 out	●	●	●	—	—	●	●	—
分流器6进6出 Diverter 6 in and 6 out	○	○	○	●	●	○	○	●
分流器8进8出 Diverter 8 in and 8 out	—	○	○	○	○	—	○	○

注3：标配功能“●”、选配功能“○”和“—”表示无。 Note 3: Standard function "●", optional function "○" and "—" indicates none.

TTWPseries

纯水标准版

Pure water standard version

传热媒体（纯水）
最高使用温度160℃
Heat transfer media (pure water)
Maximum use temperature 160℃

更高精度

Higher Precision

- 温度表示单位0.1℃，带PID自调节功能。
- The temperature is in 0.1℃, with PID self-adjustment function.

更智能

More Intelligent

- 7寸触摸屏，显示直观，操作简便；
- 设备运行状态日志与报警日志；
- 支持提前一周预约开关机；
- RS485通讯接口，支持MODBUS RTU通讯协议。
- 7" touch screen with intuitive display and easy operation.
- Equipment operation status log and alarm log.
- Support for appointment switching of one week in advance.
- RS485 communication interface, supporting MODBUS RTU communication protocol.

更安全可靠的性能

More Safe And Reliable Performance

- 可靠的液位检测方式，适用不同的水质工况；
- 系统压力实时监控；
- 系统超温、电气超温保护。
- Reliable liquid level detection method, suitable for different water quality conditions.
- Real time monitoring of system pressure.
- System over temperature and electrical over temperature protection.

更合理的结构



More Rational Structural Design

- 结构精巧设计，提高空间利用率；
- 巧妙的散热通道设计，有效保护电气元件；
- 配备纯水水箱，不受外部水质影响，减少模具堵塞及锈蚀；
- 模块化结构设计和抗腐蚀材质。
- Exquisite structural design, improving space utilization.
- Clever heat dissipation channel design effectively protects electrical components.
- Equipped with a pure water tank, unaffected by external water quality, reducing mold blockage and corrosion.
- Modular structural design and corrosion-resistant materials.

拓星链应用平台

Top Star Chain Application Platform

- 实时远程监控，设备运行数据统计、分析及寿命管理。
- Real-time remote monitoring, centralized equipment management: data statistics, analysis and machine life management are available.

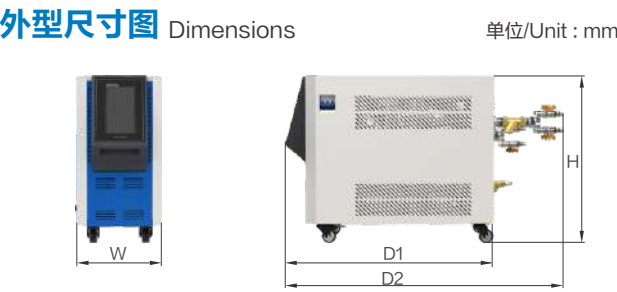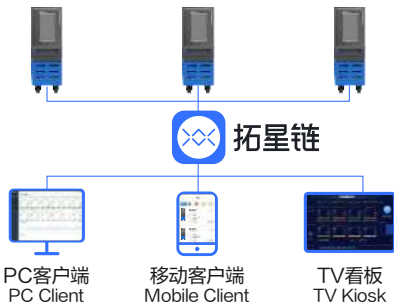

型号 Model	W	D1	D2	H
TTWP-1610P	325	865	1135	810
TTWP-1620P	325	865	1135	810
TTWP-162024P	325	955	1215	870
TTWP-1630P	325	865	1135	810
TTWP-163024P	325	955	1215	870

注1: 选配清模功能尺寸会变化，非标机型尺寸另行通知。
Note 1: The size of the optional mold clearing function will change, and the size of non-standard models will be notified.

规格 Specification

型号 Model		TTWP-1610P			TTWP-1620P			TTWP-162024P			TTWP-1630P			TTWP-163024P		
传热媒体 Heat transfer media		纯水 pure water														
使用温度 Operating temperature(℃)		冷却水温度+20℃ ~ 160℃ Cooling water temperature +20℃ ~ 160℃														
控制方式 Control method		7寸触摸屏/PID控制 7 "touch screen /PID control														
冷却能力（注） Cooling capacity(kW)（Note）		12.7			12.9			12.9			12			12		
加热器 Heater	加热功率 Heating power(kW)	8			12			12×2			12			12x2		
	驱动方式 Drive method	SSR控制 SSR control														
泵浦功率 Pump power(kW)		0.75			1.5						2.8					
泵浦形式 Pump form		卧式机械轴封泵 Horizontal mechanical shaft seal pump														
媒体泵 Media Pumps	最大流量 Maximum flow rate (L/min)	55			85						107					
	最大压力 Max. pressure (Mpa)	0.44			0.69						0.79					
	流量 Flow rate(L/min)	45	27	13	65	42	20	80	53	25						
全扬程 Full head (m)		10	23	35	17	35	52	21	40	61						
循环系统 Circulation System	出回媒管径 Outlet and return pipe diameter	DN25														
	分流器配置 Diverter configuration	4进4出 3/8" 力古 4 in 4 out 3/8 "Rigo						6进6出 3/8" 力古 6 in 6 out 3/8 "Rigo								
冷却系统 Cooling System	冷却进出水管径 Cooling inlet and outlet pipe diameter	φ 12宝塔水咀 φ 12 pagoda water Tsui														
	冷却方式 Cooling mode	间接冷却 Indirect cooling														
	冷却进出水压差 Cooling inlet and outlet pressure difference（Mpa）	≥0.05														
	冷却压力 Cooling pressure (Mpa)	0.05-0.5（进水压力大于出水压力） 0.05-0.5 (inlet pressure greater than outlet pressure)														
电 Electricity	用电规格 Electricity specification	AC380V 3P/PE 50Hz														
	主断路器容量 Main circuit breaker capacity (A)	32						63			32			63		
	总电气容量 Total electrical capacity (kW)	8.9			13.7			25.7			15			27		
	电源线 Power cord (5m long)	4×4.0mm ²			4×6.0mm ²			4×10.0mm ²			4×6.0mm ²			4×10.0mm ²		
保护功能 Protection function		电源逆相/电源缺相/水泵过电流/加热器超温/媒体温度异常/温度探头断线/整机负荷保护/系统压力低保护/系统压力高保护/系统压力高机械保护/系统液位低保护 Power reverse phase/Power lack phase/water pump overcurrent/heater overtemperature/abnormal media temperature/temperature probe disconnected/machine load protection/control loop protection/low water inlet pressure/System pressure low protection/System pressure high protection/System pressure high mechanical protection/System liquid level low protection														
机箱颜色 Case color		SPCC白色烤漆（RAL7047）、SPCC蓝色烤漆（RAL5012）、SUS SPCC white baking paint (RAL7047), SPCC blue baking paint (RAL5012), SUS														
产品净重 Product net weight (kg)		80			90			110			95			120		

注2: 冷却能力：冷却进水大于出水0.1Mpa，冷却水温10℃，△t=60℃ Note 2: Cooling capacity: cooling inlet greater than outlet 0.1Mpa, cooling temperature 10℃, △t=60℃

配置表 Configuration Table

型号 Model	TTWP-1610P	TTWP-1620P	TTWP-162024P	TTWP-1630P	TTWP-163024P
3P 380V 50HZ	●	●	●	●	●
3P 380V 60HZ	○	○	○	○	○
3P 415V 50HZ	○	○	○	○	○
3P 440V 60HZ	○	○	○	○	○
3P 480V 60HZ	○	○	○	○	○
清模功能 Mold cleaning function	○	○	○	○	○
漏电保护 Leakage protection	○	○	○	○	○
精密水质过滤器 Precision water filter	○	○	○	○	○
屏幕防护罩 Screen protection cover	○	○	○	○	○
分流器1进1出 Diverter 1 in and 1 out	○	○	○	○	○
分流器4进4出 Diverter 4 in and 4 out	●	●	●	—	—
分流器6进6出 Diverter 6 in and 6 out	○	○	○	●	●
分流器8进8出 Diverter 8 in and 8 out	—	○	○	○	○

注3: 标配功能“●”、选配功能“○”和“—”表示无。 Note 3: Standard function "●", optional function "○" and "—" indicates none.

TTWP series
间接加热标准版
Indirect Heating Standard Edition



**传热媒体（水）
最高使用温度160℃**

Heat transfer media (water)
Maximum use temperature 160°C

更高精度

Higher Precision

- 温度表示单位0.1℃，带PID自调节功能。
- The temperature is in 0.1℃, with PID self-adjustment function.

更智能

More Intelligent

- 7寸触摸屏，显示直观，操作简便；
 - 设备运行状态日志与报警日志；
 - 支持提前一周预约开关机；
 - RS485通讯接口，支持MODBUS RTU通讯协议。
- 7" touch screen with intuitive display and easy operation.
 - Equipment operation status log and alarm log.
 - Support for appointment switching of one week in advance.
 - RS485 communication interface, supporting MODBUS RTU communication protocol.

更安全可靠的性能

More Safe And Reliable Performance

- 可靠的液位检测方式，适用不同的水质工况；
- 系统压力实时监控；
- 系统超温、电气超温保护。
- Reliable liquid level detection method, suitable for different water quality conditions.
- Real time monitoring of system pressure.
- System over temperature and electrical over temperature protection.

更合理的结构

More Rational Structural Design

- 结构精巧设计，提高空间利用率。
- 发热元件外置，有效提高元件使用寿命；
- 加热管道逐级加热，加热速度更快；
- 巧妙的散热通道设计，有效保护电气元件；
- 模块化结构设计和抗腐蚀材质。

- Delicate design of structure to enhance space utilization.
- Ingenious design of heat dissipation channels to effectively protect electrical components.
- Modular design and corrosion-resistant material for the whole machine.
- Clever heat dissipation channel design effectively protects electrical components.
- Modular structure design and corrosion-resistant materials.

拓星链应用平台

Top Star Chain Application Platform


- 实时远程监控，设备运行数据统计、分析及寿命管理。
- Real-time remote monitoring, centralized equipment management: data statistics, analysis and machine life management are available.

注1: 选配清模功能尺寸会变化, 非标机型尺寸另行通知。

Note 1: The size of the optional mold clearing function will change, and the size of non-standard models will be notified.

外型尺寸图 Dimensions

单位/Unit : mm

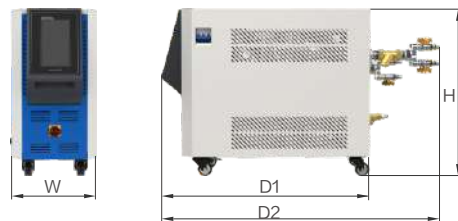

型号 Model	W	D1	D2	H
TTWP-1610N	305	700	945	645
TTWP-1620N	305	835	1080	670
TTWP-162024N	305	835	1100	845
TTWP-1630N	305	835	1080	670
TTWP-163024N	305	835	1100	845

规格 Specification

型号 Model		TTWP-1610N			TTWP-1620N		TTWP-162024N		TTWP-1630N		TTWP-163024N		
传热媒体 Heat transfer media		清水 执行标准: GB1576 (工业锅炉水质) Clear water Implementation standard: GB1576 (industrial boiler water quality)											
使用温度 Operating temperature(℃)		冷却水温度+20℃ ~ 160℃ Cooling water temperature +20℃ ~ 160℃											
控制方式 Control method		7寸触摸屏/PID控制 7 "touch screen /PID control											
冷却能力 (注) Cooling capacity(kW) (Note)		12.7			12.9		12.9		12		12		
加热器 Heater	加热功率 Heating power(kW)	8			12		12×2		12		12x2		
	加热方式 Heating method	间接加热 Indirect heat											
	驱动方式 Drive method	SSR控制 SSR control											
泵浦功率 Pump power(kW)		0.75			1.5				2.8				
泵浦形式 Pump form		卧式机械轴封泵 Horizontal mechanical shaft seal pump											
媒体泵 Media Pumps	最大流量 Maximum flow rate (L/min)	55			85				107				
	最大压力 Max. pressure (Mpa)	0.44			0.69				0.79				
	流量 Flow rate(L/min)	45	27	13	65	42	20	80	53	25			
全扬程 Full head (m)		10	23	35	17	35	52	21	40	61			
循环系统 Circulation System	出回媒管径 Outlet and return pipe diameter	DN25											
	分流器配置 Diverter configuration	4进4出 3/8" 力古 4 in 4 out 3/8 "Rigo							6进6出 3/8" 力古 6 in 6 out 3/8 "Rigo				
冷却系统 Cooling System	冷却进出水管径 Cooling inlet and outlet pipe diameter	φ 12宝塔水咀 φ12 pagoda water Tsui											
	冷却方式 Cooling mode	间接冷却 Indirect cooling											
	冷却进出水压差 Cooling inlet and outlet pressure difference (Mpa)	≥0.05											
	冷却压力 Cooling pressure (Mpa)	0.05-0.5 (进水压力大于出水压力) 0.05-0.5 (inlet pressure greater than outlet pressure)											
电 Electricity	用电规格 Electricity specification	AC380V 3P/PE 50Hz											
	主断路器容量 Main circuit breaker capacity (A)	32				63				32		63	
	总电气容量 Total electrical capacity (kW)	8.9			13.7		25.7		15		27		
	电源线 Power cord (5m long)	4 × 4.0mm ²			4 × 6.0mm ²		4 × 10.0mm ²		4 × 6.0mm ²		4 × 10.0mm ²		
保护功能 Protection function		电源逆相/电源缺相/水泵过电流/加热器超温/媒体温度异常/温度探头断线/整机负荷保护/系统压力低保护/系统压力高保护/系统压力高机械保护/系统液位低保护 Power reverse phase/Power lack phase/water pump overcurrent/heater overtemperature/abnormal media temperature/temperature probe disconnected/machine load protection/ control loop protection/low water inlet pressure/System pressure low protection/System pressure high protection/System pressure high mechanical protection/System liquid level low protection											
机箱颜色 Case color		SPCC白色烤漆 (RAL7047) 、SPCC蓝色烤漆 (RAL5012) 、SUS SPCC white baking paint (RAL7047), SPCC blue baking paint (RAL5012), SUS											
产品净重 Product net weight (kg)		70			80		105		90		110		

注2: 冷却能力: 冷却进水大于出水0.1Mpa, 冷却水温10℃, $\Delta t=60^{\circ}\text{C}$ Note 2: Cooling capacity: cooling inlet greater than outlet 0.1Mpa, cooling temperature 10℃, $\Delta t=60^{\circ}\text{C}$

配置表 Configuration Table

型号 Model	TTWP-1610N	TTWP-1620N	TTWP-162024N	TTWP-1630N	TTWP-163024N
3P 380V 50HZ	●	●	●	●	●
3P 380V 60HZ	○	○	○	○	○
3P 415V 50HZ	○	○	○	○	○
3P 440V 60HZ	○	○	○	○	○
3P 480V 60HZ	○	○	○	○	○
清模功能 Mold cleaning function	○	○	○	○	○
漏电保护 Leakage protection	○	○	○	○	○
精密水质过滤器 Precision water filter	○	○	○	○	○
屏幕防护罩 Screen protection cover	○	○	○	○	○
分流器1进1出 Diverter 1 in and 1 out	○	○	○	○	○
分流器4进4出 Diverter 4 in and 4 out	●	●	●	—	—
分流器6进6出 Diverter 6 in and 6 out	○	○	○	●	●
分流器8进8出 Diverter 8 in and 8 out	—	○	○	○	○

注3: 标配功能“●”、选配功能“○”和“-”表示无。 Note 3: Standard function "●", optional function "○" and "-" indicates none.

TTWBseries

领航版 Ultimate Version

传热媒体（水）
最高使用温度160℃
Heat transfer media (water)
Maximum use temperature 160℃




TTWB-1610

TTWB-1610D

外型尺寸图 Dimensions

单位/Unit : mm

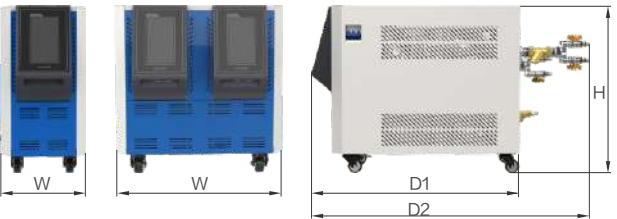

型号 Model	W	D1	D2	H
TTWB-1610	305	725	975	585
TTWB-1620	325	725	975	650
TTWB-162024	325	855	1105	730
TTWB-163024	325	855	1105	730
TTWB-1610D	595	725	975	605
TTWB-1620D	595	725	975	670

注1：选配清模功能尺寸会变化，非标机型尺寸另行通知。
Note 1: The size of the optional mold clearing function will change, and the size of non-standard models will be notified.

更高精度

Higher Precision

- 温度表示单位0.1℃，带PID自调节功能。
- The temperature is in 0.1℃, with PID self-adjustment function.

更智能

More Intelligent

- 7寸触摸屏，显示直观，操作简便；
- 设备运行状态日志与报警日志；
- 支持提前一周预约开关机；
- RS485通讯接口，支持MODBUS RTU通讯协议。
- 7" touch screen with intuitive display and easy operation.
- Equipment operation status log and alarm log.
- Support for appointment switching of one week in advance.
- RS485 communication interface, supporting MODBUS RTU communication protocol.

更安全可靠的性能

More Safe And Reliable Performance

- 高精度超声波流量计,确保温度及流量稳定；
- 防管路、模具堵塞或泄漏检测；
- 系统压力实时监控；
- 系统超温、电气超温保护。
- High-precision ultrasonic flow meter to ensure stable temperature and flow.
- Prevent pipelines, mold blockage or leak detection.
- System pressure real-time monitoring.
- System over-temperature and electrical over-temperature protection.

更合理的结构


More Rational Structural Design

- 结构精巧设计，提升空间利用率；
- 巧妙的散热通道设计，有效保护电气元件；
- 模块化结构设计和抗腐蚀材质。
- Delicate design of structure to enhance space utilization.
- Ingenious design of heat dissipation channels to effectively protect electrical components.
- Modular design and corrosion-resistant material for the whole machine.

拓星链应用平台

Top Star Chain Application Platform

- 实时远程监控，设备运行数据统计、分析及寿命管理。
- Real-time remote monitoring, centralized equipment management: data statistics, analysis and machine life management are available.

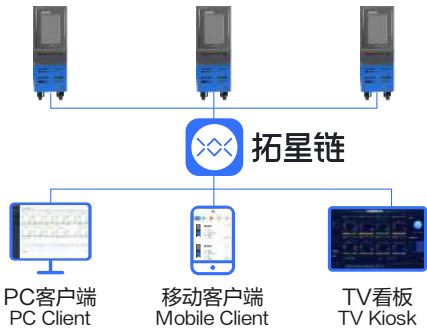

规格 Specification

型号 Model		TTWB-1610			TTWB-1620		TTWB-162024			TTWB-163024			TTWB-1610D			TTWB-1620D		
传热媒体 Heat transfer media		清水 执行标准：GB1576（工业锅炉水质） Clear water Implementation standard: GB1576 (industrial boiler water quality)																
使用温度 Operating temperature(℃)		冷却水温度+20℃ ~ 160℃ Cooling water temperature +20℃ ~ 160℃																
控制方式 Control method		7寸触摸屏/PID控制 7 "touch screen /PID control																
加热器 Heater	冷却能力 Cooling capacity(kW)(Note 2)	12.7			12.9		12.9			12			12.7+12.7			12.9+12.9		
	加热功率 Heating power(kW)	8			12		12×2			12×2			8+8			12+12		
	驱动方式 Drive method	SSR控制 SSR control																
媒体泵 Media Pumps	泵浦功率 Pump power(kW)	0.75			1.5			2.8			0.75+0.75			1.5+1.5				
	泵浦形式 Pump form	卧式机械轴封泵 Horizontal mechanical shaft seal pump																
	最大流量 Maximum flow rate (L/min)	55			85			107			55			85				
	最大压力 Max. pressure (Mpa)	0.44			0.69			0.79			0.44			0.69				
	流量 Flow rate(L/min)	45	27	13	65	42	20	80	53	25	45	27	13	65	42	20		
	全扬程 Full head (m)	10	23	35	17	35	52	21	40	61	10	23	35	17	35	52		
循环系统 Circulation System	出回媒管径 Outlet and return pipe diameter	DN25																
	分流器配置 Diverter configuration	4进4出 3/8" 力古 4 in 4 out 3/8 "Rigo						6进6出 3/8" 力古 6 in 6 out 3/8 "Rigo			4进4出+4进4出 3/8" 力古 4 in 4 out +4 in 4 out 3/8 "Rigo							
冷却系统 Cooling System	冷却进出水管径 Cooling inlet and outlet pipe diameter	φ 12宝塔水咀 φ 12 pagoda water Tsui																
	冷却方式 Cooling mode	间接冷却 Indirect cooling																
	冷却进出水压差 Cooling inlet and outlet pressure difference (Mpa)	≥0.05																
	冷却压力 Cooling pressure (Mpa)	0.05~0.5（进水压力大于出水压力） 0.05~0.5 (inlet pressure greater than outlet pressure)																
电 Electricity	用电规格 Electricity specification	AC380V 3P/PE 50Hz																
	主断路器容量 Main circuit breaker capacity (A)	32						63										
	总电气容量 Total electrical capacity (kW)	8.9			13.7		25.7			27			17.9			27.4		
	电源线 Power cord (5m long)	4×4.0mm ²			4×6.0mm ²		4×10.0mm ²						4×6.0mm ²			4×10.0mm ²		
保护功能 Protection function		电源逆相/电源缺相/水泵过电流/加热器超温/媒体温度异常/温度探头断线/整机负荷保护/ 控制回路保护/系统压力低保护/系统压力高保护/系统压力高机械保护/系统液位低保护 Power reverse phase/power lack phase/water pump overcurrent/heater overtemperature/media temperature anomaly/ temperature probe disconnected/machine load protection/control loop protection/low system pressure protection/ high system pressure protection/high system pressure																
机箱颜色 Case color		SPCC白色烤漆（RAL7047）、SPCC蓝色烤漆（RAL5012）、SUS SPCC white baking paint (RAL7047), SPCC blue baking paint (RAL5012), SUS																
产品净重 Product net weight (kg)		70			80		100			110			130			150		

注2：冷却能力：冷却进水大于出水0.1Mpa，冷却水温10℃，△t=60℃ Note 2: Cooling capacity: cooling inlet greater than outlet 0.1Mpa, cooling temperature 10℃, △t=60℃

配置表 Configuration Table

型号 Model	TTWB-1610	TTWB-1620	TTWB-162024	TTWB-163024	TTWB-1610D	TTWB-1620D
3P 380V 50HZ	●	●	●	●	●	●
3P 380V 60HZ	○	○	○	○	○	○
3P 415V 50HZ	○	○	○	○	○	○
3P 440V 60HZ	○	○	○	○	○	○
3P 480V 60HZ	○	○	○	○	○	○
清模功能 Mold cleaning function	○	○	○	○	○	○
漏电保护 Leakage protection	○	○	○	○	○	○
精密水质过滤器 Precision water filter	○	○	○	○	○	○
屏幕防护罩 Screen protection cover	○	○	○	○	○	○
分流器1进1出 Diverter 1 in and 1 out	○	○	○	○	○	○
分流器4进4出 Diverter 4 in and 4 out	●	●	●	-	●	●
分流器6进6出 Diverter 6 in and 6 out	○	○	○	●	○	○
分流器8进8出 Diverter 8 in and 8 out	-	○	○	○	-	○

注3：标配功能“●”、选配功能“○”和“-”表示无。 Note 3: Standard function "●", optional function "○" and "-" indicates none.

TTWBseries
间接加热领航版
Indirect Heating Ultimate Version



外型尺寸图 Dimensions 单位/Unit : mm



型号 Model	W	D1	D2	H
TTWB-1610N	305	700	945	645
TTWB-1620N	305	835	1080	670
TTWB-162024N	305	835	1100	845
TTWB-163024N	305	835	1100	845

注1: 选配清模功能尺寸会变化，非标机型尺寸另行通知。
Note 1: The size of the optional mold clearing function will change, and the size of non-standard models will be notified.

传热媒体（水）
最高使用温度160℃

Heat transfer media (water)
Maximum use temperature 160℃

更高精度

Higher Precision

- 温度表示单位0.1℃，带PID自调节功能。
- The temperature is in 0.1℃, with PID self-adjustment function.

更智能

More Intelligent

- 7寸触摸屏，显示直观，操作简便；
- 设备运行状态日志与报警日志；
- 支持提前一周预约开关机；
- RS485通讯接口，支持MODBUS RTU通讯协议。
- 7" touch screen with intuitive display and easy operation.
- Equipment operation status log and alarm log.
- Support for appointment switching of one week in advance.
- RS485 communication interface, supporting MODBUS RTU communication protocol.

更安全可靠的性能

More Safe And Reliable Performance

- 高精度超声波流量计,确保温度及流量稳定；
- 防管路、模具堵塞或泄漏检测；
- 系统压力实时监控；
- 系统超温、电气超温保护。
- High -precision ultrasonic flow meter to ensure stable temperature and flow.
- Prevent pipelines, mold blockage or leak detection.
- Real-time system pressure monitoring.
- System over-temperature and electrical over-temperature protection.

更合理的结构

More Rational Structural Design

- 结构精巧设计，提高空间利用率。
- 发热元件外置，有效提高元件使用寿命；
- 加热管道逐级加热，加热速度更快；
- 巧妙的散热通道设计，有效保护电气元件；
- 模块化结构设计和抗腐蚀材质。

- Delicate design of structure to enhance space utilization.
- Ingenious design of heat dissipation channels to effectively protect electrical components.
- Modular design and corrosion-resistant material for the whole machine.
- Clever heat dissipation channel design effectively protects electrical components.
- Modular structure design and corrosion-resistant materials.

拓星链应用平台

Top Star Chain Application Platform

- 实时远程监控，设备运行数据统计、分析及寿命管理。
- Real-time remote monitoring, centralized equipment management: data statistics, analysis and machine life management are available.

规格 Specification

型号 Model		TTWB-1610N			TTWB-1620N		TTWB-162024N			TTWB-163024N		
传热媒体 Heat transfer media		清水 执行标准: GB1576 (工业锅炉水质) Clear water Implementation standard: GB1576 (industrial boiler water quality)										
使用温度 Operating temperature(℃)		冷却水温度+20℃ ~ 160℃ Cooling water temperature +20℃ ~ 160℃										
控制方式 Control method		7寸触摸屏/PID控制 7 "touch screen /PID control										
冷却能力（注） Cooling capacity(kW) (Note)		12.7			12.9		12.9			12		
加热器 Heater	加热功率 Heating power(kW)	8			12		12x2			12x2		
	加热方式 Heating method	间接加热 Indirect heat										
	驱动方式 Drive method	SSR控制 SSR control										
媒体泵 Media Pumps	泵浦功率 Pump power(kW)	0.75			1.5			2.8				
	泵浦形式 Pump form	卧式机械轴封泵 Horizontal mechanical shaft seal pump										
	最大流量 Maximum flow rate (L/min)	55			85			107				
	最大压力 Max. pressure (Mpa)	0.44			0.69			0.79				
	流量 Flow rate(L/min)	45	27	13	65	42	20	82	53	23		
	全扬程 Full head (m)	10	23	35	17	35	52	21	40	60		
循环系统 Circulation System	出回媒管径 Outlet and return pipe diameter				DN25							
	分流器配置 Diverter configuration				4进4出 3/8" 力古 4 in 4 out 3/8 "Rigo			6进6出 3/8" 力古 6 in 6 out 3/8 "Rigo				
冷却系统 Cooling System	冷却进出水管径 Cooling inlet and outlet pipe diameter				φ 12宝塔水咀 φ 12 pagoda water Tsui							
	冷却方式 Cooling mode				间接冷却 Indirect cooling							
	冷却进出水压差 Cooling inlet and outlet pressure difference (Mpa)				≥0.05							
	冷却压力 Cooling pressure (Mpa)				0.05-0.5 (进水压力大于出水压力) 0.05-0.5 (inlet pressure greater than outlet pressure)							
电 Electricity	用电规格 Electricity specification	AC380V 3P/PE 50Hz										
	主断路器容量 Main circuit breaker capacity (A)	32			63							
	总电气容量 Total electrical capacity (kW)	8.9			13.7		25.7			27		
	电源线 Power cord (5m long)	4×4.0mm²			4×6.0mm²		4×10.0mm²			4×10.0mm²		
保护功能 Protection function		电源逆相/电源缺相/水泵过电流/加热器超温/媒体温度异常/温度探头断线/整机负荷保护/控制回路保护/系统压力低保护/系统压力高保护/系统压力高机械保护/系统液位低保护 Power reverse phase/power lack phase/water pump overcurrent/heater overtemperature/media temperature anomaly/temperature probe disconnected/machine load protection/control loop protection/low system pressure protection/high system pressure protection/high system pressure										
机箱颜色 Case color		SPCC白色烤漆 (RAL7047) 、 SPCC蓝色烤漆 (RAL5012) 、 SUS SPCC white baking paint (RAL7047), SPCC blue baking paint (RAL5012), SUS										
产品净重 Product net weight (kg)		70			80		100			110		

注2: 冷却能力：冷却进水大于出水0.1Mpa，冷却水温10℃，△t=60℃ Note 2: Cooling capacity: cooling inlet greater than outlet 0.1Mpa, cooling temperature 10℃, △t=60℃

配置表 Configuration Table

型号 Model	TTWB-1610N	TTWB-1620N	TTWB-162024N	TTWB-163024N
3P 380V 50HZ	●	●	●	●
3P 380V 60HZ	○	○	○	○
3P 415V 50HZ	○	○	○	○
3P 440V 60HZ	○	○	○	○
3P 480V 60HZ	○	○	○	○
清模功能 Mold cleaning function	○	○	○	○
漏电保护 Leakage protection	○	○	○	○
精密水质过滤器 Precision water filter	○	○	○	○
屏幕防护罩 Screen protection cover	○	○	○	○
分流器1进1出 Diverter 1 in and 1 out	○	○	○	○
分流器4进4出 Diverter 4 in and 4 out	●	●	●	—
分流器6进6出 Diverter 6 in and 6 out	○	○	○	●
分流器8进8出 Diverter 8 in and 8 out	—	○	○	○

注3: 标配功能“●”、选配功能“○”和“—”表示无。 Note 3: Standard function "●", optional function "○" and "-" indicates none.

TTWPseries

标准版Standard Version

传热媒体（水）
最高使用温度180℃
Heat transfer media (water)
Maximum use temperature 180℃

更高精度

- Higher Precision
- 温度表示单位0.1℃，带PID自调节功能。
 - The temperature is in 0.1℃, with PID self-adjustment function.

更智能

- More Intelligent
- 7寸触摸屏，显示直观，操作简便；
 - 设备运行状态日志与报警日志；
 - 支持提前一周预约开关机；
 - RS485通讯接口，支持MODBUS RTU通讯协议。
 - 7" touch screen with intuitive display and easy operation;
 - Equipment operation status log and alarm log;
 - Support for appointment switching of one week in advance;
 - RS485 communication interface, supporting MODBUS RTU communication protocol.

更安全可靠的性能

- More Safe And Reliable Performance
- 无轴封磁力泵，运行更稳定；
 - 可靠的液位检测方式，适用不同水质工况；
 - 系统压力实时监控；
 - 系统超温、电气超温保护。
 - Sealless magnetic drive pump for more stable operation.
 - Reliable liquid level detection, suitable for different water quality conditions.
 - Real-time system pressure monitoring.
 - System over temperature and electrical over temperature protection.


更合理的结构

- More Rational Structural Design
- 结构精巧设计，提升空间利用率；
 - 巧妙的散热通道设计，有效保护电气元件；
 - 模块化结构设计和抗腐蚀材质。
 - Delicate design of structure to enhance space utilization;
 - Ingenious design of heat dissipation channels to effectively protect electrical components;
 - Modular design and corrosion-resistant material for the whole machine.

拓星链应用平台

Top Star Chain Application Platform

- 实时远程监控，设备运行数据统计、分析及寿命管理。
- Real-time remote monitoring, centralized equipment management: data statistics, analysis and machine life management are available.

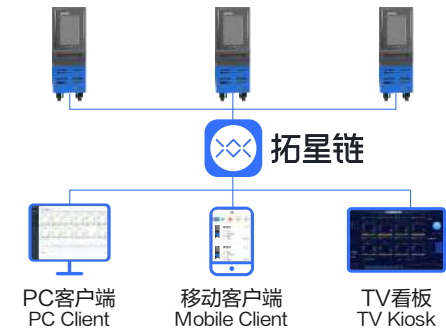

TTWP-1810D

TTWP-1810

外型尺寸图Dimensions

单位/Unit : mm



型号 Model	W	D1	D2	H
TTWP-1810	305	725	980	585
TTWP-1820	325	725	980	680
TTWP-182024	325	855	1120	730
TTWP-1830	345	790	1045	680
TTWP-183024	325	855	1120	730
TTWP-1810D	595	725	980	605
TTWP-1820D	595	725	980	680
TTWP-183024D	595	860	1130	740

注1：选配清模功能尺寸会变化，非标机型尺寸另行通知。
Note 1: The size of the optional mold clearing function will change, and the size of non-standard models will be notified.

规格Specification

型号 Model		TTWP-1810			TTWP-1820			TTWP-182024			TTWP-1830			TTWP-183024			TTWP-1810D			TTWP-1820D			TTWP-183024D				
传热媒体 Heat transfer media		清水 执行标准：GB1576（工业锅炉水质） Clear water Implementation standard: GB1576 (industrial boiler water quality)																									
使用温度 Operating temperature(℃)		冷却水温度+20℃ ~ 180℃ Cooling water temperature +20℃ ~ 180℃																									
控制方式 Control method		7寸触摸屏/PID控制 7 "touch screen /PID control																									
冷却能力 Cooling capacity(kw)(Note 2)		10.8			10.3			10.3			10.4			10.4			10.8+10.8			10.3+10.3			10.4+10.4				
加热器 Heater	加热功率 Heating power(kVV)	8			12			12×2			12			12×2			8+8			12+12			12x2+12x2				
	驱动方式 Drive method	SSR控制 SSR control																									
泵浦功率 Pump power(kw)		1.1			1.5						2.2						1.1+1.1			1.5+1.5			2.2				
泵浦形式 Pump form		卧式磁力泵（无轴封） Horizontal magnetic pump (without shaft seal)																									
媒体泵 Media Pumps	最大流量 Maximum fow rate(L/min)	54			73						90						54			73			90				
	最大压力 Max. pressure(Mpa)	0.5			0.51						0.55						0.5			0.51			0.55				
	流量 Flow rate(L/min)	43	27	13	55	36	15	65	40	20	43	27	13	55	36	15	65	40	20								
	全扬程 Full head(m)	10	23	37	13	27	38	15	35	53	10	23	37	13	27	38	15	35	52								
循环系统 Circulation System	出回媒管径 Outlet and return pipe diameter	DN25																									
	分流器配置 Diverter configuration	4进4出 3/8" 力古 4 in 4 out 3/8 "Rigo									6进6出 3/8" 力古 6 in 6 out 3/8 "Rigo						4进4出+4进4出 3/8" 力古 4 in 4 out +4 in 4 out 3/8 "Rigo						6进6出+6进6出 3/8" 力古 6 in 6 out +6 in 6 out 3/8 "Rigo				
冷却系统 Cooling System	冷却进出水管径 Cooling inlet and outlet pipe diameter	φ 12宝塔水咀 φ 12 pagoda water Tsui																									
	冷却方式 Cooling mode	间接冷却 Indirect cooling																									
	冷却进出水压差 Cooling inlet and outlet pressure difference (Mpa)	≥0.05																									
	冷却压力 Cooling pressure(Mpa)	0.05-0.5（进水压力大于出水压力） 0.05-0.5 (inlet pressure greater than outlet pressure)																									
电 Electricity	用电规格 Electricity specification	AC380V 3P/PE 50Hz																									
	主断路器容量 Main circuit breaker capacity(A)	32						63			32						63			125							
	总电气容量 Total electrical capacity(kW)	9.3			13.7			25.7			14.4			26.4			18.6			27.4			52.8				
	电源线 Power cord(5m long)	4×4.0mm ²			4×6.0mm ²			4×10.0mm ²			4×6.0mm ²			4×10.0mm ²			4×6.0mm ²			4×10.0mm ²			4×25.0mm ²				
保护功能 Protection function		电源逆相/电源缺相/水泵过电流/加热器超温/媒体温度异常/温度探头断线/整机负荷保护/控制回路保护/ 系统压力低保护/系统压力高保护/系统压力高机械保护/系统液位低保护 Power supply reverse phase/power supply lack phase/water pump overcurrent/heater overtemperature/ media temperature anomaly/temperature probe disconnected/machine load protection/control loop protection /low system pressure protection/ high system pressure protection/high system pressure mechanical protection/low system liquid level protection																									
机箱颜色 Case color		SPCC白色烤漆（RAL7047）、SPCC蓝色烤漆（RAL5012）、SUS SPCC white baking paint (RAL7047), SPCC blue baking paint (RAL5012), SUS																									
产品净重 Product net weight (kg)		70			75			80			80			90			130			140			165				

注2：冷却能力：冷却进水大于出水0.1Mpa，冷却水温10℃，△t=60℃ Note 2: Cooling capacity: cooling inlet greater than outlet 0.1Mpa, cooling temperature 10℃, △t=60℃

配置表 Configuration Table

型号 Model	TTWP-1810	TTWP-1820	TTWP-182024	TTWP-1830	TTWP-183024	TTWP-1810D	TTWP-1820D	TTWP-183024D
3P 380V 50HZ	●	●	●	●	●	●	●	●
3P 380V 60HZ	○	○	○	○	○	○	○	○
3P 415V 50HZ	○	○	○	○	○	○	○	○
3P 440V 60HZ	○	○	○	○	○	○	○	○
3P 480V 60HZ	○	○	○	○	○	○	○	○
清模功能 Mold cleaning function	○	○	○	○	○	○	○	○
漏电保护 Leakage protection	○	○	○	○	○	○	○	○
精密水质过滤器 Precision water filter	○	○	○	○	○	○	○	○
屏幕防护罩 Screen protection cover	○	○	○	○	○	○	○	○
分流器1进1出 Diverter 1 in and 1 out	○	○	○	○	○	○	○	○
分流器4进4出 Diverter 4 in and 4 out	●	●	●	—	—	●	●	—
分流器6进6出 Diverter 6 in and 6 out	○	○	○	●	●	○	○	●
分流器8进8出 Diverter 8 in and 8 out	—	○	○	○	○	—	○	○

注3：标配功能“●”、选配功能“○”和“—”表示无。 Note 3: Standard function "●", optional function "○" and "—" indicates none.

TTWPseries

纯水标准版

Pure water standard version

传热媒体（纯水）
最高使用温度180℃
Heat transfer media (pure water)
Maximum use temperature 180℃

更高精度

Higher Precision

- 温度表示单位0.1℃，带PID自调节功能。
- The temperature is in 0.1℃, with PID self-adjustment function.

更智能

More Intelligent

- 7寸触摸屏，显示直观，操作简便；
- 设备运行状态日志与报警日志；
- 支持提前一周预约开关机；
- RS485通讯接口，支持MODBUS RTU通讯协议。
- 7" touch screen with intuitive display and easy operation.
- Equipment operation status log and alarm log.
- Support for appointment switching of one week in advance.
- RS485 communication interface, supporting MODBUS RTU communication protocol.

更安全可靠的性能

More Safe And Reliable Performance

- 无轴封磁力泵，运行更稳定；
- 可靠的液位检测方式，适用不同的水质工况；
- 系统压力实时监控；
- 系统超温、电气超温保护。
- Sealless magnetic drive pump for more stable operation.
- Reliable liquid level detection, suitable for different water quality conditions.
- Real-time system pressure monitoring.
- System over temperature and electrical over temperature protection.

更合理的结构


More Rational Structural Design

- 结构精巧设计，提高空间利用率；
- 巧妙的散热通道设计，有效保护电气元件；
- 配备纯水水箱，不受外部水质影响，减少模具堵塞及锈蚀；
- 模块化结构设计和抗腐蚀材质。
- Exquisite structural design, improving space utilization.
- Clever heat dissipation channel design effectively protects electrical components.
- Equipped with a pure water tank, unaffected by external water quality, reducing mold blockage and corrosion.
- Modular structural design and corrosion-resistant materials.

拓星链应用平台

Top Star Chain Application Platform

- 实时远程监控，设备运行数据统计、分析及寿命管理。
- Real-time remote monitoring, centralized equipment management: data statistics, analysis and machine life management are available.

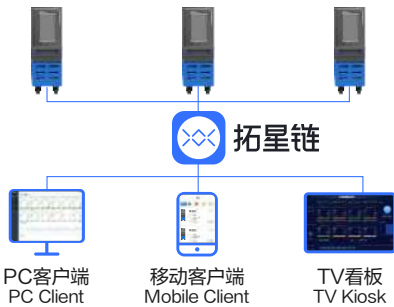

规格 Specification

型号 Model		TTWP-1810P			TTWP-1820P		TTWP-182024P		TTWP-1830P		TTWP-183024P	
传热媒体 Heat transfer media		纯水 pure water										
使用温度 Operating temperature(℃)		冷却水温度+20℃ ~ 180℃ Cooling water temperature +20℃ ~ 180℃										
控制方式 Control method		7寸触摸屏/PID控制 7 "touch screen /PID control										
冷却能力（注） Cooling capacity(kW) (Note)		10.8			10.3		12.3		10.4		10.4	
加热器 Heater	加热功率 Heating power(kW)	8			12		12×2		12		12x2	
	驱动方式 Drive method	SSR控制 SSR control										
媒体泵 Media Pumps	泵浦功率 Pump power(kW)	1.1			1.5				2.2			
	泵浦形式 Pump form	卧式磁力泵（无轴封） Horizontal magnetic pump (without shaft seal)										
	最大流量 Maximum flow rate (L/min)	54			73				90			
	最大压力 Max. pressure (Mpa)	0.5			0.51				0.55			
	流量 Flow rate(L/min)	45	27	13	55	36	15	65	40	20		
	全扬程 Full head (m)	10	23	35	13	27	38	15	35	53		
循环系统 Circulation System	出回媒管径 Outlet and return pipe diameter	DN25										
	分流器配置 Diverter configuration	4进4出 3/8" 力古 4 in 4 out 3/8 "Rigo						6进6出 3/8" 力古 6 in 6 out 3/8 "Rigo				
冷却系统 Cooling System	冷却进出水管径 Cooling inlet and outlet pipe diameter	φ 12宝塔水咀 φ 12 pagoda water Tsui										
	冷却方式 Cooling mode	间接冷却 Indirect cooling										
	冷却进出水压差 Cooling inlet and outlet pressure difference (Mpa)	≥0.05										
	冷却压力 Cooling pressure (Mpa)	0.05-0.5（进水压力大于出水压力） 0.05-0.5 (inlet pressure greater than outlet pressure)										
电 Electricity	用电规格 Electricity specification	AC380V 3P/PE 50Hz										
	主断路器容量 Main circuit breaker capacity (A)	32				63			32		63	
	总电气容量 Total electrical capacity (kW)	9.3			13.7		25.7		14.4		26.4	
	电源线 Power cord (5m long)	4×4.0mm ²			4×6.0mm ²		4×10.0mm ²		4×6.0mm ²		4×10.0mm ²	
保护功能 Protection function		电源逆相/电源缺相/水泵过电流/加热器超温/媒体温度异常/温度探头断线/整机负荷保护/系统压力低保护/系统压力高保护/系统压力高机械保护/系统液位低保护 Power reverse phase/Power lack phase/water pump overcurrent/heater overtemperature/abnormal media temperature/temperature probe disconnected/machine load protection/ control loop protection/low water inlet pressure/System pressure low protection/System pressure high protection/System pressure high mechanical protection/System liquid level low protection										
机箱颜色 Case color		SPCC白色烤漆（RAL7047）、SPCC蓝色烤漆（RAL5012）、SUS SPCC white baking paint (RAL7047), SPCC blue baking paint (RAL5012), SUS										
产品净重 Product net weight (kg)		80			90		110		90		120	

注2：冷却能力：冷却进水大于出水0.1Mpa，冷却水温10℃，△t=60℃ Note 2: Cooling capacity: cooling inlet greater than outlet 0.1Mpa, cooling temperature 10℃, △t=60℃

配置表 Configuration Table

型号 Model	TTWP-1810P		TTWP-1820P		TTWP-182024P		TTWP-1830P		TTWP-183024P	
3P 380V 50HZ	●		●		●		●		●	
3P 380V 60HZ	○		○		○		○		○	
3P 415V 50HZ	○		○		○		○		○	
3P 440V 60HZ	○		○		○		○		○	
3P 480V 60HZ	○		○		○		○		○	
清模功能 Mold cleaning function	○		○		○		○		○	
漏电保护 Leakage protection	○		○		○		○		○	
精密水质过滤器 Precision water filter	○		○		○		○		○	
屏幕防护罩 Screen protection cover	○		○		○		○		○	
分流器1进1出 Diverter 1 in and 1 out	○		○		○		○		○	
分流器4进4出 Diverter 4 in and 4 out	●		●		●		—		—	
分流器6进6出 Diverter 6 in and 6 out	○		○		○		●		●	
分流器8进8出 Diverter 8 in and 8 out	—		○		○		○		○	

注3：标配功能“●”、选配功能“○”和“—”表示无。 Note 3: Standard function "●", optional function "○" and "—" indicates none.

外型尺寸图 Dimensions

单位/Unit : mm



型号 Model	W	D1	D2	H
TTWP-1810P	325	865	1135	810
TTWP-1820P	325	865	1135	810
TTWP-182024P	325	955	1215	870
TTWP-1830P	325	865	1135	810
TTWP-183024P	325	955	1215	870

注1：选配清模功能尺寸会变化，非标机型尺寸另行通知。
Note 1: The size of the optional mold clearing function will change, and the size of non-standard models will be notified.

TTWP series
间接加热标准版
Indirect Heating Standard Edition



**传热媒体（水）
最高使用温度180℃**

Heat transfer media (water)
Maximum use temperature 180°C

更高精度

Higher Precision

- 温度表示单位0.1℃，带PID自调节功能。
- The temperature is in 0.1℃, with PID self-adjustment function.

更智能

More Intelligent

- 7寸触摸屏，显示直观，操作简便；
 - 设备运行状态日志与报警日志；
 - 支持提前一周预约开关机；
 - RS485通讯接口，支持MODBUS RTU通讯协议。
- 7" touch screen with intuitive display and easy operation;
 - Equipment operation status log and alarm log;
 - Support for appointment switching of one week in advance;
 - RS485 communication interface, supporting MODBUS RTU communication protocol.

更安全可靠的性能

More Safe And Reliable Performance

- 无轴封磁力泵，运行更稳定；
 - 可靠的液位检测方式，适用不同的水质工况；
 - 系统压力实时监控；
 - 系统超温、电气超温保护。
- Sealless magnetic drive pump for more stable operation.
 - Reliable liquid level detection, suitable for different water quality conditions.
 - Real-time system pressure monitoring.
 - System over temperature and electrical over temperature protection.

更合理的结构

More Rational Structural Design

- 结构精巧设计，提高空间利用率。
- 发热元件外置，有效提高元件使用寿命；
- 加热管道逐级加热，加热速度更快；
- 巧妙的散热通道设计，有效保护电气元件；
- 模块化结构设计和抗腐蚀材质。

- Delicate design of structure to enhance space utilization.
- Ingenious design of heat dissipation channels to effectively protect electrical components.
- Modular design and corrosion-resistant material for the whole machine.
- Clever heat dissipation channel design effectively protects electrical components.
- Modular structure design and corrosion-resistant materials.

拓星链应用平台

Top Star Chain Application Platform


- 实时远程监控，设备运行数据统计、分析及寿命管理。
- Real-time remote monitoring, centralized equipment management: data statistics, analysis and machine life management are available.

注1: 选配清模功能尺寸会变化, 非标机型尺寸另行通知。

Note 1: The size of the optional mold clearing function will change, and the size of non-standard models will be notified.

外型尺寸图 Dimensions

单位/Unit : mm

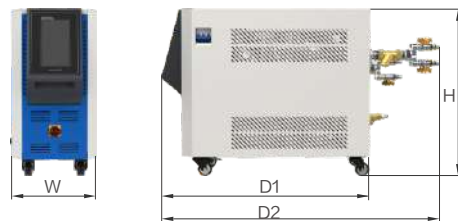

型号 Model	W	D1	D2	H
TTWP-1810N	305	700	945	645
TTWP-1820N	305	835	1080	670
TTWP-182024N	305	835	1100	845
TTWP-1830N	305	835	1080	670
TTWP-183024N	305	835	1100	845

规格 Specification

型号 Model		TTWP-1810N			TTWP-1820N		TTWP-182024N		TTWP-1830N		TTWP-183024N		
传热媒体 Heat transfer media		清水 执行标准: GB1576 (工业锅炉水质) Clear water Implementation standard: GB1576 (industrial boiler water quality)											
使用温度 Operating temperature(℃)		冷却水温度+20℃ ~ 180℃ Cooling water temperature +20℃ ~ 180℃											
控制方式 Control method		7寸触摸屏/PID控制 7 "touch screen /PID control											
冷却能力(注) Cooling capacity(kW) (Note)		10.8			10.3		10.3		10.4		10.4		
加热器 Heater	加热功率 Heating power(kW)	8			12		12×2		12		12x2		
	加热方式 Heating method	间接加热 Indirect heat											
	驱动方式 Drive method	SSR控制 SSR control											
媒体泵 Media Pumps	泵浦功率 Pump power(kW)	1.1			1.5				2.2				
	泵浦形式 Pump form	卧式磁力泵 (无轴封) Horizontal magnetic pump (without shaft seal)											
	最大流量 Maximum flow rate (L/min)	54			73				90				
	最大压力 Max. pressure (Mpa)	0.5			0.51				0.55				
	流量 Flow rate(L/min)	43	27	13	55	36	15	65	40	20			
	全扬程 Full head (m)	10	23	37	13	27	38	15	35	53			
循环系统 Circulation System	出回媒管径 Outlet and return pipe diameter	DN25											
	分流器配置 Diverter configuration	4进4出 3/8" 力古 4 in 4 out 3/8 "Rigo						6进6出 3/8" 力古 6 in 6 out 3/8 "Rigo					
冷却系统 Cooling System	冷却进出水管径 Cooling inlet and outlet pipe diameter	φ 12宝塔水咀 φ 12 pagoda water Tsui											
	冷却方式 Cooling mode	间接冷却 Indirect cooling											
	冷却进出水压差 Cooling inlet and outlet pressure difference (Mpa)	≥0.05											
电 Electricity	冷却压力 Cooling pressure (Mpa)	0.05-0.5 (进水压力大于出水压力) 0.05-0.5 (inlet pressure greater than outlet pressure)											
	用电规格 Electricity specification	AC380V 3P/PE 50Hz											
	主断路器容量 Main circuit breaker capacity (A)	32				63				32		63	
	总电气容量 Total electrical capacity (kW)	9.3			13.7		25.7		14.4		26.4		
	电源线 Power cord (5m long)	4 × 4.0mm ²			4 × 6.0mm ²		4 × 10.0mm ²		4 × 6.0mm ²		4 × 10.0mm ²		
保护功能 Protection function		电源逆相/电源缺相/水泵过电流/加热器超温/媒体温度异常/温度探头断线/整机负荷保护/系统压力低保护/系统压力高保护/系统压力高机械保护/系统液位低保护 Power reverse phase/Power lack phase/water pump overcurrent/heater overtemperature/abnormal media temperature/temperature probe disconnected/machine load protection/ control loop protection/low water inlet pressure/System pressure low protection/System pressure high protection/System pressure high mechanical protection/System liquid level low protection											
机箱颜色 Case color		SPCC白色烤漆 (RAL7047) 、 SPCC蓝色烤漆 (RAL5012) 、 SUS SPCC white baking paint (RAL7047), SPCC blue baking paint (RAL5012), SUS											
产品净重 Product net weight (kg)		70			85		100		90		110		

注2: 冷却能力: 冷却进水大于出水0.1Mpa, 冷却水温10℃, $\Delta t=60^{\circ}\text{C}$ Note 2: Cooling capacity: cooling inlet greater than outlet 0.1Mpa, cooling temperature 10℃, $\Delta t=60^{\circ}\text{C}$

配置表 Configuration Table

型号 Model	TTWP-1810N	TTWP-1820N	TTWP-182024N	TTWP-1830N	TTWP-183024N
3P 380V 50HZ	●	●	●	●	●
3P 380V 60HZ	○	○	○	○	○
3P 415V 50HZ	○	○	○	○	○
3P 440V 60HZ	○	○	○	○	○
3P 480V 60HZ	○	○	○	○	○
清模功能 Mold cleaning function	○	○	○	○	○
漏电保护 Leakage protection	○	○	○	○	○
精密水质过滤器 Precision water filter	○	○	○	○	○
屏幕防护罩 Screen protection cover	○	○	○	○	○
分流器1进1出 Diverter 1 in and 1 out	○	○	○	○	○
分流器4进4出 Diverter 4 in and 4 out	●	●	●	—	—
分流器6进6出 Diverter 6 in and 6 out	○	○	○	●	●
分流器8进8出 Diverter 8 in and 8 out	—	○	○	○	○

注3: 标配功能“●”、选配功能“○”和“-”表示无。 Note 3: Standard function "●", optional function "○" and "-" indicates none.

TTWBseries

领航版Ultimate Version

传热媒体（水）
最高使用温度180℃
Heat transfer media (water)
Maximum use temperature 180℃




TTWB-1810D

TTWB-1810

外型尺寸图Dimensions

单位/Unit：mm

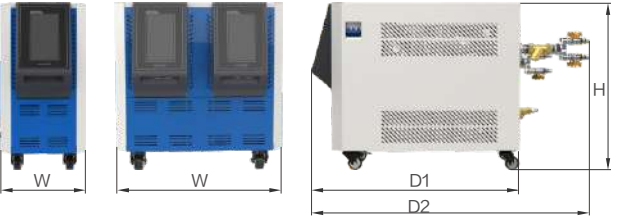

型号 Model	W	D1	D2	H
TTWB-1810	305	725	975	585
TTWB-1820	325	725	975	650
TTWB-182024	325	855	1105	730
TTWB-183024	325	855	1105	730
TTWB-1810D	595	725	975	605
TTWB-1820D	595	725	975	670

注1：选配清模功能尺寸会变化，非标机型尺寸另行通知。
Note 1: The size of the optional mold clearing function will change, and the size of non-standard models will be notified.

更高精度

Higher Precision

- 温度表示单位0.1℃，带PID自调节功能。
- The temperature is in 0.1℃, with PID self-adjustment function.

更智能

More Intelligent

- 7寸触摸屏，显示直观，操作简便；
- 设备运行状态日志与报警日志；
- 支持提前一周预约开关机；
- RS485通讯接口，支持MODBUS RTU通讯协议。
- 7" touch screen with intuitive display and easy operation.
- Equipment operation status log and alarm log.
- Support for appointment switching of one week in advance.
- RS485 communication interface, supporting MODBUS RTU communication protocol.

更安全可靠的性能

More Safe And Reliable Performance

- 无轴封磁力泵，运行更稳定；
- 高精度超声波流量计,确保温度及流量稳定；
- 防管路、模具堵塞或泄漏检测；
- 系统压力实时监控；
- 系统超温、电气超温保护。
- Sealless magnetic drive pump for more stable operation.
- High-precision ultrasonic flow meter to ensure stable temperature and flow;
- Prevent pipelines, mold blockage or leak detection.
- Real-time system pressure monitoring.
- System over-temperature and electrical over-temperature protection.

更合理的结构


More Rational Structural Design

- 结构精巧设计，提升空间利用率；
- 巧妙的散热通道设计，有效保护电气元件；
- 模块化结构设计和抗腐蚀材质。
- Delicate design of structure to enhance space utilization.
- Ingenious design of heat dissipation channels to effectively protect electrical components.
- Modular design and corrosion-resistant material for the whole machine.

拓星链应用平台

Top Star Chain Application Platform

- 实时远程监控，设备运行数据统计、分析及寿命管理。
- Real-time remote monitoring, centralized equipment management: data statistics, analysis and machine life management are available.

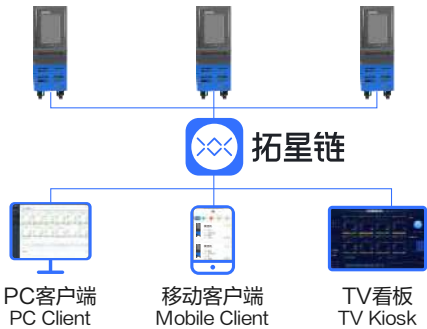

规格 Specification

型号 Model		TTWB-1810			TTWB-1820		TTWB-182024			TTWB-183024			TTWB-1810D			TTWB-1820D		
传热媒体 Heat transfer media		清水 执行标准: GB1576 (工业锅炉水质) Clear water Implementation standard: GB1576 (industrial boiler water quality)																
使用温度 Operating temperature(℃)		冷却水温度+20℃ ~ 180℃ Cooling water temperature +20℃ ~ 180℃																
控制方式 Control method		7寸触摸屏/PID控制 7 "touch screen /PID control																
加热器 Heater	冷却能力 Cooling capacity(kW)(Note 2)	10.8			10.3		10.3		10.4		10.8+10.8			10.3+10.3				
	加热功率 Heating power(kW)	8			12		12×2		12×2		8+8			12+12				
	驱动方式 Drive method	SSR控制 SSR control																
媒体泵 Media Pumps	泵浦功率 Pump power(kW)	1.1			1.5				2.2		1.1+1.1			1.5+1.5				
	泵浦形式 Pump form	卧式磁力泵（无轴封） Horizontal magnetic pump (without shaft seal)																
	最大流量 Maximum flow rate (L/min)	54					73		90		54			73				
	最大压力 Max. pressure (Mpa)	0.5					0.51		0.55		0.5			0.51				
	流量 Flow rate(L/min)	45	27	13	55	36	15	65	40	20	45	27	13	55	36	15		
循环系统 Circulation System	全扬程 Full head (m)	10	23	37	13	27	38	15	35	53	10	23	37	13	27	38		
	出回媒管径 Outlet and return pipe diameter	DN25																
	分流器配置 Diverter configuration	4进4出 3/8" 力古 4 in 4 out 3/8 "Rigo						6进6出 3/8" 力古 6 in 6 out 3/8 "Rigo			4进4出+4进4出 3/8" 力古 4 in 4 out +4 in 4 out 3/8 "Rigo							
	冷却进出水管径 Cooling inlet and outlet pipe diameter	φ 12宝塔水咀 φ 12 pagoda water Tsui																
冷却系统 Cooling System	冷却方式 Cooling mode	间接冷却 Indirect cooling																
	冷却进出水压差 Cooling inlet and outlet pressure difference (Mpa)	≥0.05																
	冷却压力 Cooling pressure (Mpa)	0.05-0.5（ 进水压力大于出水压力 ） 0.05-0.5 (inlet pressure greater than outlet pressure)																
电 Electricity	用电规格 Electricity specification	AC380V 3P/PE 50Hz																
	主断路器容量 Main circuit breaker capacity (A)	32					63											
	总电气容量 Total electrical capacity (kW)	9.3			13.7		25.7		26.4		18.6			27.4				
	电源线 Power cord (5m long)	4×4.0mm ²			4×6.0mm ²		4×10.0mm ²					4×6.0mm ²			4×10.0mm ²			
保护功能 Protection function		电源逆相/电源缺相/水泵过电流/加热器超温/媒体温度异常/温度探头断线/整机负荷保护/ 控制回路保护/系统压力低保护/系统压力高保护/系统压力高机械保护/系统液位低保护 Power reverse phase/power lack phase/water pump overcurrent/heater overtemperature/media temperature anomaly/ temperature probe disconnected/machine load protection/control loop protection/low system pressure protection/ high system pressure protection/high system pressure																
机箱颜色 Case color		SPCC白色烤漆（RAL7047）、SPCC蓝色烤漆（RAL5012）、SUS SPCC white baking paint (RAL7047), SPCC blue baking paint (RAL5012), SUS																
产品净重 Product net weight (kg)		70			80		100		110		140			155				

注2：冷却能力：冷却进水大于出水0.1Mpa，冷却水温10℃，△t=60℃ Note 2: Cooling capacity: cooling inlet greater than outlet 0.1Mpa, cooling temperature 10℃, △t=60℃

配置表 Configuration Table

型号 Model	TTWB-1810	TTWB-1820	TTWB-182024	TTWB-183024	TTWB-1810D	TTWB-1820D
3P 380V 50HZ	●	●	●	●	●	●
3P 380V 60HZ	○	○	○	○	○	○
3P 415V 50HZ	○	○	○	○	○	○
3P 440V 60HZ	○	○	○	○	○	○
3P 480V 60HZ	○	○	○	○	○	○
清模功能 Mold cleaning function	○	○	○	○	○	○
漏电保护 Leakage protection	○	○	○	○	○	○
精密水质过滤器 Precision water filter	○	○	○	○	○	○
屏幕防护罩 Screen protection cover	○	○	○	○	○	○
分流器1进1出 Diverter 1 in and 1 out	○	○	○	○	○	○
分流器4进4出 Diverter 4 in and 4 out	●	●	●	-	●	●
分流器6进6出 Diverter 6 in and 6 out	○	○	○	●	○	○
分流器8进8出 Diverter 8 in and 8 out	-	○	○	○	-	○

注3：标配功能“●”、选配功能“○”和“-”表示无。 Note 3: Standard function "●", optional function "○" and "-" indicates none.


TTWBseries

间接加热领航版

Indirect Heating Ultimate Version



外型尺寸图 Dimensions 单位/Unit : mm

				
型号 Model	W	D1	D2	H
TTWB-1810N	305	700	945	645
TTWB-1820N	305	835	1080	670
TTWB-182024N	305	835	1100	845
TTWB-183024N	305	835	1100	845

注1: 选配清模功能尺寸会变化, 非标机型尺寸另行通知。
Note 1: The size of the optional mold clearing function will change, and the size of non-standard models will be notified.

传热媒体（水）

最高使用温度180℃

Heat transfer media (water)
Maximum use temperature 180℃

更高精度

Higher Precision

- 温度表示单位0.1℃，带PID自调节功能。
- The temperature is in 0.1℃, with PID self-adjustment function.

更智能

More Intelligent

- 7寸触摸屏，显示直观，操作简便；
- 设备运行状态日志与报警日志；
- 支持提前一周预约开关机；
- RS485通讯接口，支持MODBUS RTU通讯协议。
- 7" touch screen with intuitive display and easy operation.
- Equipment operation status log and alarm log.
- Support for appointment switching of one week in advance.
- RS485 communication interface, supporting MODBUS RTU communication protocol.

更安全可靠的性能

More Safe And Reliable Performance

- 无轴封磁力泵，运行更稳定；
- 高精度超声波流量计,确保温度及流量稳定；
- 防管路、模具堵塞或泄漏检测；
- 系统压力实时监控；
- 系统超温、电气超温保护。
- Sealless magnetic drive pump for more stable operation.
- High-precision ultrasonic flow meter to ensure stable temperature and flow;
- Prevent pipelines, mold blockage or leak detection.
- Real-time system pressure monitoring.
- System over temperature and electrical over temperature protection.

更合理的结构

More Rational Structural Design

- 结构精巧设计，提高空间利用率。
- 发热元件外置，有效提高元件使用寿命；
- 加热管道逐级加热，加热速度更快；
- 巧妙的散热通道设计，有效保护电气元件。
- 模块化结构设计和抗腐蚀材质。

- Delicate design of structure to enhance space utilization.
- Ingenious design of heat dissipation channels to effectively protect electrical components.
- Modular design and corrosion-resistant material for the whole machine.
- Clever heat dissipation channel design effectively protects electrical components.
- Modular structure design and corrosion-resistant materials.

拓星链应用平台

Top Star Chain Application Platform

- 实时远程监控，设备运行数据统计、分析及寿命管理。
- Real-time remote monitoring, centralized equipment management: data statistics, analysis and machine life management are available.

规格 Specification

型号 Model		TTWB-1810N			TTWB-1820N		TTWB-182024N			TTWB-183024N		
传热媒体 Heat transfer media		清水 执行标准: GB1576 (工业锅炉水质) Clear water Implementation standard: GB1576 (industrial boiler water quality)										
使用温度 Operating temperature(℃)		冷却水温度+20℃ ~ 180℃ Cooling water temperature +20℃ ~ 180℃										
控制方式 Control method		7寸触摸屏/PID控制 7 "touch screen /PID control										
冷却能力（注） Cooling capacity(kW) (Note)		10.8			10.3		10.3			10.4		
加热器 Heater	加热功率 Heating power(kW)	8			12		12x2			12x2		
	加热方式 Heating method	间接加热 Indirect heat										
	驱动方式 Drive method	SSR控制 SSR control										
媒体泵 Media Pumps	泵浦功率 Pump power(kW)	1.1			1.5				2.2			
	泵浦形式 Pump form	卧式磁力泵（无轴封） Horizontal magnetic pump (without shaft seal)										
	最大流量 Maximum flow rate (L/min)	54			73				90			
	最大压力 Max. pressure (Mpa)	0.5			0.51				0.55			
	流量 Flow rate(L/min)	45	27	13	55	36	15	65	40	20		
	全扬程 Full head (m)	10	23	35	13	27	38	15	35	53		
循环系统 Circulation System	出回媒管径 Outlet and return pipe diameter				DN25							
	分流器配置 Diverter configuration				4进4出 3/8" 力古 4 in 4 out 3/8 "Rigo				6进6出 3/8" 力古 6 in 6 out 3/8 "Rigo			
冷却系统 Cooling System	冷却进出水管径 Cooling inlet and outlet pipe diameter				φ 12宝塔水咀 φ 12 pagoda water Tsui							
	冷却方式 Cooling mode				间接冷却 Indirect cooling							
	冷却进出水压差 Cooling inlet and outlet pressure difference (Mpa)				≥0.05							
	冷却压力 Cooling pressure (Mpa)				0.05-0.5（进水压力大于出水压力） 0.05-0.5 (inlet pressure greater than outlet pressure)							
电 Electricity	用电规格 Electricity specification	AC380V 3P/PE 50Hz										
	主断路器容量 Main circuit breaker capacity (A)	32							63			
	总电气容量 Total electrical capacity (kW)	9.3			13.7		25.7			26.4		
	电源线 Power cord (5m long)	4×4.0mm ²			4×6.0mm ²		4×10.0mm ²			4×10.0mm ²		
保护功能 Protection function		电源逆相/电源缺相/水泵过电流/加热器超温/媒体温度异常/温度探头断线/整机负荷保护/控制回路保护/系统压力低保护/系统压力高保护/系统压力高机械保护/系统液位低保护 Power reverse phase/power lack phase/water pump overcurrent/heater overtemperature/media temperature anomaly/temperature probe disconnected/machine load protection/control loop protection/low system pressure protection/high system pressure protection/high system pressure										
机箱颜色 Case color		SPCC白色烤漆（RAL7047）、SPCC蓝色烤漆（RAL5012）、SUS SPCC white baking paint (RAL7047), SPCC blue baking paint (RAL5012), SUS										
产品净重 Product net weight (kg)		70			85		100			110		

注2: 冷却能力: 冷却进水大于出水0.1Mpa, 冷却水温10℃, △t=60℃ Note 2: Cooling capacity: cooling inlet greater than outlet 0.1Mpa, cooling temperature 10℃, △t=60℃

配置表 Configuration Table

型号 Model	TTWB-1810N	TTWB-1820N	TTWB-182024N	TTWB-183024N
3P 380V 50HZ	●	●	●	●
3P 380V 60HZ	○	○	○	○
3P 415V 50HZ	○	○	○	○
3P 440V 60HZ	○	○	○	○
3P 480V 60HZ	○	○	○	○
清模功能 Mold cleaning function	○	○	○	○
漏电保护 Leakage protection	○	○	○	○
精密水质过滤器 Precision water filter	○	○	○	○
屏幕防护罩 Screen protection cover	○	○	○	○
分流器1进1出 Diverter 1 in and 1 out	○	○	○	○
分流器4进4出 Diverter 4 in and 4 out	●	●	●	—
分流器6进6出 Diverter 6 in and 6 out	○	○	○	●
分流器8进8出 Diverter 8 in and 8 out	—	○	○	○

注3: 标配功能 “●”、选配功能 “○” 和 “—” 表示无。 Note 3: Standard function "●", optional function "○" and "-" indicates none.

TTOPseries

标准版Standard Version

传热媒体（油）
最高使用温度200℃
Heat transfer media (Oil)
Maximum use temperature 200℃



TTOP-2010D

TTOP-2010

外型尺寸图Dimensions

单位/Unit : mm



型号 Model	W	D1	D2	H
TTOP-2010	305	775	1025	645
TTOP-2020	325	840	1105	710
TTOP-202024	325	860	1100	860
TTOP-2030	325	840	1105	710
TTOP-203024	325	860	1100	860
TTOP-2010D	595	775	1025	665
TTOP-2020D	595	855	1100	730
TTOP-203024D	595	860	1100	875

注1：选配清模功能尺寸会变化，非标机型尺寸另行通知。
Note 1: The size of the optional mold clearing function will change, and the size of non-standard models will be notified.

更高精度

Higher Precision

- 温度表示单位0.1℃，带PID自调节功能。
- The temperature is in 0.1℃, with PID self-adjustment function.

更智能

More Intelligent

- 7寸触摸屏，显示直观，操作简便；
- 设备运行状态日志与报警日志；
- 支持提前一周预约开关机；
- RS485通讯接口，支持MODBUS RTU通讯协议。
- 7" touch screen with intuitive display and easy operation.
- Equipment operation status log and alarm log.
- Support for appointment switching of one week in advance.
- RS485 communication interface, supporting MODBUS RTU communication protocol.

更安全可靠的性能

More Safe And Reliable Performance

- 系统回路超温脱扣保护，控制回路短路过热保护；
- 油箱液位检测和缺油报警保护；
- 泵浦逆相、欠相、过载检测；
- 双回路温度检测，能有效监测模具是否堵塞。
- System circuit over-temperature decoupling protection and control circuit short-circuit fuse protection.
- Oil tank level detection and oil shortage alarm protection.
- Pump anti-phase, under-phase, overload detection.
- Double-loop temperature detection, which can effectively monitor whether the mold is blocked.

更合理的结构


More Rational Structural Design

- 结构精巧设计，提升空间利用率；
- 巧妙的散热通道设计，有效保护电气元件；
- 模块化结构设计。
- Delicate design of structure to enhance space utilization.
- Ingenious design of heat dissipation channels to effectively protect electrical components.
- Modular design .

拓星链应用平台

Top Star Chain Application Platform

- 实时远程监控，设备运行数据统计、分析及寿命管理。
- Real-time remote monitoring, centralized equipment management: data statistics, analysis and machine life management are available.

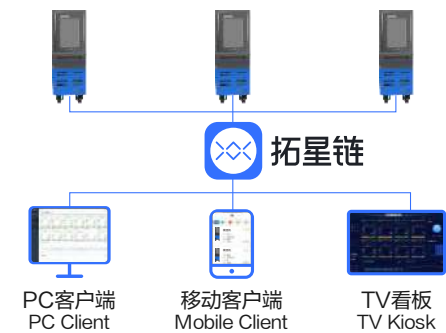

规格 Specification

型号 Model	TTOP-2010			TTOP-2020			TTOP-202024			TTOP-2030			TTOP-203024			TTOP-2010D			TTOP-2020D			TTOP-203024D		
传热媒体 Heat transfer media	导热油（200℃以上） Heat conducting oil (above 200℃)																							
使用温度 Operating temperature(℃)	冷却水温度+20℃ ~ 200℃ Cooling water temperature +20℃ ~ 200℃																							
控制方式 Control method	7寸触摸屏/PID控制 7 "touch screen /PID control																							
冷却能力 Cooling capacity(kW)(Note 2)	7.4										7.4+7.4													
加热器 Heater	8			12			12×2			12			12×2			8+8			12+12			12×2+12×2		
驱动方式 Drive method	SSR控制 SSR control																							
泵浦功率 Pump power(kW)	0.75			1.5						2.8						0.75+0.75			1.5+1.5			2.8+2.8		
泵浦形式 Pump form	立式机械轴封泵 Vertical mechanical shaft seal pump			卧式机械轴封泵 Horizontal mechanical shaft seal pump												立式机械轴封泵 Vertical mechanical shaft seal pump			卧式机械轴封泵 Horizontal mechanical shaft seal pump					
最大流量 Maximum flow rate (L/min)	58			85						107						58			85			107		
最大压力 Max. pressure (Mpa)	0.44			0.69						0.79						0.44			0.69			0.79		
流量 Flow rate(L/min)	45	30	19	65	42	20	80	53	25	45	30	19	65	42	20	80	53	25						
全扬程 Full head (m)	10	22	30	17	35	52	21	40	61	10	22	30	17	35	52	21	40	61						
循环系统 Circulation System	出回媒管径 Outlet and return pipe diameter			DN25																				
分流器配置 Diverter configuration				4进4出 3/8" 力古 4 in 4 out 3/8 "Rigo						6进6出 3/8" 力古 6 in 6 out 3/8 "Rigo						4进4出+4进4出 3/8" 力古 4 in 4 out +4 in 4 out 3/8 "Rigo						6进6出 3/8" 力古 6 in 6 out 3/8 "Rigo		
冷却系统 Cooling System	冷却进出水管径 Cooling inlet and outlet pipe diameter			φ 12宝塔水咀 φ12 pagoda water Tsui																				
冷却方式 Cooling mode	间接冷却 Indirect cooling																							
冷却进出水压差 Cooling inlet and outlet pressure difference (Mpa)	≥0.05																							
冷却压力 Cooling pressure (Mpa)	0.1~0.5（ 进水压力大于出水压力 ） 0.1~0.5 (inlet pressure greater than outlet pressure)																							
电 Electricity	用电规格 Electricity specification AC380V 3P/PE 50Hz																							
主断路器容量 Main circuit breaker capacity (A)	32						63			32			63						125					
总电气容量 Total electrical capacity (kW)	8.9			13.7			25.7			15			27			17.9			27.4			54		
电源线 Power cord (5m long)	4×4.0mm ²			4×6.0mm ²			4×10.0mm ²			4×6.0mm ²			4×10.0mm ²			4×6.0mm ²			4×10.0mm ²			4×25.0mm ²		
保护功能 Protection function	电源逆相/电源缺相/油泵过电流/加热器超温/媒体温度异常/温度探头断线/ Reverse phase of power supply/lack of phase of power supply/over-current of oil pump/over-temperature of heater/ 整机负荷保护/控制回路保护/低液位警报 abnormal media temperature/disconnection of temperature probe/load protection of whole machine/protection of control loop/low level alarm																							
机箱颜色 Case color	SPCC白色烤漆（ RAL7047 ）、SPCC蓝色烤漆（ RAL5012 ）、SUS SPCC white baking paint (RAL7047), SPCC blue baking paint (RAL5012), SUS																							
产品净重 Product net weight (kg)	60			80			100			90			110			110			150			210		

注2：冷却能力：冷却进水大于出水0.1Mpa，冷却水温10℃，△t=60℃ Note 2: Cooling capacity: cooling inlet greater than outlet 0.1Mpa, cooling temperature 10℃, △t=60℃

配置表 Configuration Table


型号 Model	TTOP-2010	TTOP-2020	TTOP-202024	TTOP-2030	TTOP-203024	TTOP-2010D	TTOP-2020D	TTOP-203024D
3P 380V 50HZ	●	●	●	●	●	●	●	●
3P 380V 60HZ	○	○	○	○	○	○	○	○
3P 415V 50HZ	○	○	○	○	○	○	○	○
3P 440V 60HZ	○	○	○	○	○	○	○	○
3P 480V 60HZ	○	○	○	○	○	○	○	○
清模功能 Mold cleaning function	○	○	○	○	○	○	○	○
漏电保护 Leakage protection	○	○	○	○	○	○	○	○
屏幕防护罩 Screen protection cover	○	○	○	○	○	○	○	○
分流器1进1出 Diverter 1 in and 1 out	○	○	○	○	○	○	○	○
分流器4进4出 Diverter 4 in and 4 out	●	●	●	—	—	●	●	—
分流器6进6出 Diverter 6 in and 6 out	○	○	○	●	●	○	○	●
分流器8进8出 Diverter 8 in and 8 out	—	○	○	○	○	—	○	○

注3：标配功能“●”、选配功能“○”和“—”表示无。 Note 3: Standard function "●", optional function "○" and "—" indicates none.

TTOP series

标准版Standard Version

传热媒体（油）
最高使用温度320℃
Heat transfer media (Oil)
Maximum use temperature 320℃

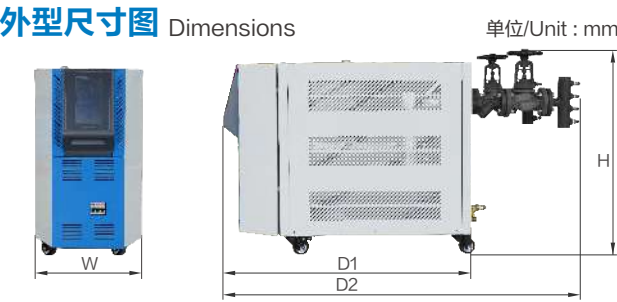

型号 Model	W	D1	D2	H
TTOP-3210	420	980	1400	885
TTOP-321024	420	980	1400	1040
TTOP-3220	420	980	1400	885
TTOP-322024	420	980	1400	1040
TTOP-324040	450	1080	1510	1250

注1：选配清模功能尺寸会变化，非标机型尺寸另行通知。
Note 1: The size of the optional mold clearing function will change, and the size of non-standard models will be notified.

更高精度

- Higher Precision
- 温度表示单位0.1℃，带PID自调节功能。
 - The temperature is in 0.1℃, with PID self-adjustment function.

更智能

- More Intelligent
- 7寸触摸屏，显示直观，操作简便；
 - 设备运行状态日志与报警日志；
 - 支持提前一周预约开关机；
 - RS485通讯接口，支持MODBUS RTU通讯协议。
 - 7" touch screen with intuitive display and easy operation.
 - Equipment operation status log and alarm log.
 - Support for appointment switching of one week in advance.
 - RS485 communication interface, supporting MODBUS RTU communication protocol.

更安全可靠的性能

- More Safe And Reliable Performance
- 无轴封磁力泵，运行更稳定；
 - 系统回路超温脱扣保护，控制回路短路过热保护；
 - 油箱液位检测和缺油报警保护；
 - 泵浦逆相、欠相、过载检测；
 - 油泵反转清模。
 - Sealless magnetic drive pump for more stable operation.
 - System circuit over-temperature decoupling protection and control circuit short-circuit fuse protection.
 - Oil tank level detection and oil shortage alarm protection.
 - Pump anti-phase, under-phase, overload detection.
 - Oil pump reverses for clean mold.


更合理的结构

- More Rational Structural Design
- 结构精巧设计，提升空间利用率；
 - 巧妙的散热通道设计和电箱分离结构，有效保护电气元件；
 - 模块化结构设计。
 - Delicate design of structure to enhance space utilization.
 - Ingenious design of heat dissipation channels and electric control box separation structure, to effectively protect electrical components.
 - Modular design.

拓星链应用平台

Top Star Chain Application Platform

- 实时远程监控，设备运行数据统计、分析及寿命管理。
- Real-time remote monitoring, centralized equipment management: data statistics, analysis and machine life management are available.

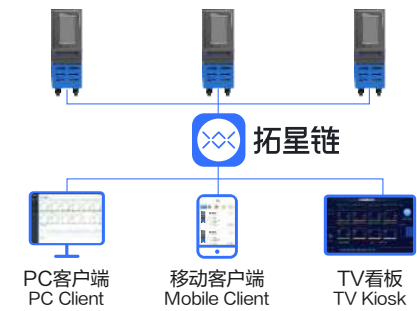

规格 Specification

型号 Model		TTOP-3210		TTOP-321024		TTOP-3220		TTOP-322024			TTOP-324040		
传热媒体 Heat transfer media		导热油（320℃以上） Heat conducting oil (above 320℃)											
使用温度 Operating temperature(℃)		冷却水温度+20℃ ~ 320℃ Cooling water temperature +20℃ ~ 320℃											
控制方式 Control method		7寸触摸屏/PID控制 7 "touch screen /PID control											
冷却能力（注） Cooling capacity(kW) (Note)		9.7								18			
加热器 Heater	加热功率 Heating power(kW)	12		12×2		12		12×2			20x2		
	驱动方式 Drive method	SSR控制 SSR control											
泵浦功率 Pump power(kW)		1.1				1.5				3			
泵浦形式 Pump form		卧式磁力泵（无轴封） Horizontal magnetic pump (without shaft seal)											
媒体泵 Media Pumps	最大流量 Maximum flow rate (L/min)	54				73				120			
	最大压力 Max. pressure (Mpa)	0.5				0.51				0.7			
流量 Flow rate(L/min)		45	27	13	55	36	15	82	54	23			
全扬程 Full head (m)		10	23	37	13	27	38	20	40	60			
出回媒管径 Outlet and return pipe diameter		DN25											
分流器配置 Diverter configuration		4进4出 3/8" 力古 4 in 4 out 3/8 "Rigo							6进6出 3/8" 力古 6 in 6 out 3/8 "Rigo				
冷却进出水管径 Cooling inlet and outlet pipe diameter		φ 12宝塔水咀 φ 12 pagoda water Tsui											
冷却系统 Cooling System	冷却方式 Cooling mode	间接冷却 Indirect cooling											
	冷却进出水压差 Cooling inlet and outlet pressure difference (Mpa)	≥0.05											
	冷却压力 Cooling pressure (Mpa)	0.1~0.5（进水压力大于出水压力） 0.1~0.5 (inlet pressure greater than outlet pressure)											
用电规格 Electricity specification		AC380V 3P/PE 50Hz											
电 Electricity	主断路器容量 Main circuit breaker capacity (A)	32		63		32		63			100		
	总电气容量 Total electrical capacity (kW)	13.3		25.3		13.7		25.7			43.2		
电源线 Power cord (5m long)		4×6.0mm ²		4×10.0mm ²		4×6.0mm ²		4×10.0mm ²			4×25.0mm ²		
保护功能 Protection function		电源逆相/电源缺相/油泵过电流/加热器超温/媒体温度异常/温度探头断线/整机负荷保护/控制回路保护/低液位警报 Reverse phase of power supply/lack of phase of power supply/over-current of oil pump/over-temperature of heater/ abnormal media temperature/disconnection of temperature probe/load protection of whole machine/protection of control loop/low level alarm											
机箱颜色 Case color		SPCC白色烤漆（RAL7047）、SPCC蓝色烤漆（RAL5012） SPCC white baking paint (RAL7047), SPCC blue baking paint (RAL5012)											
产品净重 Product net weight (kg)		140		150		140		160			230		

注2：冷却能力：冷却进水大于出水0.1Mpa，冷却水温10℃，△t=60℃ Note 2: Cooling capacity: cooling inlet greater than outlet 0.1Mpa, cooling temperature 10℃, △t=60℃

配置表 Configuration Table

型号 Model	TTOP-3210	TTOP-321024	TTOP-3220	TTOP-322024	TTOP-324040
3P 380V 50HZ	●	●	●	●	●
3P 380V 60HZ	○	○	○	○	○
3P 415V 50HZ	○	○	○	○	○
3P 440V 60HZ	○	○	○	○	○
3P 480V 60HZ	○	○	○	○	○
漏电保护 Leakage protection	○	○	○	○	○
屏幕防护罩 Screen protection cover	○	○	○	○	○
分流器1进1出 Diverter 1 in and 1 out	○	○	○	○	○
分流器4进4出 Diverter 4 in and 4 out	●	●	●	●	○
分流器6进6出 Diverter 6 in and 6 out	○	○	○	○	●
分流器8进8出 Diverter 8 in and 8 out	—	—	○	○	○

注3：标配功能“●”、选配功能“○”和“—”表示无。 Note 3: Standard function "●", optional function "○" and "—" indicates none.

TTWE series
经济版 Economic version

传热媒体（水）
最高使用温度120℃
Heat transfer media (water)
Maximum operating temperature 120℃

高精度

Higher Precision

- 温度显示精度能达到±0.1℃。
- Temperature accuracy can display in ±0.1℃.

便捷的操作

Convenient Operation

- 简单易用的按键操作模式；
- 醒目的报警代码提示；
- 实时运行状态灯，显示简洁。
- Simple and easy –to –use key operation mode.
- Eye-catching alarm code prompts.
- Real-time running status light,displaying concise.

安全可靠的性能

Safe And Reliable Performance

- 系统回路超温脱扣保护，控制回路短路过热保护；
- 泵浦逆相、欠相、过载检测；
- 浮球液位检测方式，适用不同水质工况。
- System circuit ultra –temperature removal protection, controlling circuit short circuit overheating protection.
- Pump anti-phase, under-phase,and overload detection.
- Floating liquid level detection method is suitable for different water quality working conditions.

合理的设计

Rational Structural Design


- 简约化管路设计，提升空间利用率；
- 巧妙的散热通道设计，有效保护电气元件；
- 立式泵浦设计，提供更大的出水压力。
- Simplified pipeline design to improve space utilization.
- Ingenious design of heat dissipation channels to effectively protect electrical components;
- Vertical pump design,provides larger water outlet pressure.

型号 Model	W	D1	D2	H
TTWE-1210	205	515	670	530
TTWE-1220	240	525	670	640
TTWE-1210D	410	515	670	550
TTWE-1220D	470	525	670	670

注1：选配清模功能尺寸会变化，非标机型尺寸另行通知。
Note 1: The size of the optional mold clearing function will change, and the size of non-standard models will be notified.

外型尺寸图 Dimensions

单位/Unit : mm

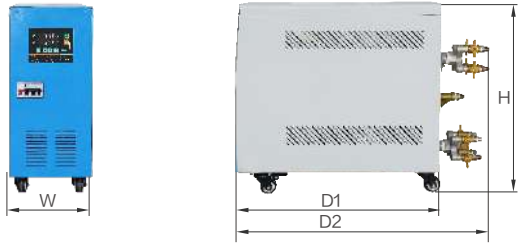

规格 Specification

型号 Model		TTWE-1210				TTWE-1220			TTWE-1210D			TTWE-1220D		
传热媒体 Heat transfer media		水 执行标准: GB1576 (工业锅炉水质) Clear water Implementation standard: GB1576 (industrial boiler water quality)												
使用温度 Operating temperature(℃)		冷却水温度+20℃ ~ 120℃ Cooling water temperature +20℃ ~ 120℃												
控制方式 Control method		按键屏 Button screen												
加热器 Heater	冷却能力（注） Cooling capacity(kW) (Note)	15.3				18.2			15.3+15.3			18.2+18.2		
	加热功率 Heating power(kW)	8				12			8+8			12+12		
	泵浦功率 Pump power(kW)	0.75				1.5			0.75+0.75			1.5+1.5		
媒体泵 Media Pumps	泵浦形式 Pump form	立式机械轴封泵 Vertical mechanical shaft seal pump												
	最大流量 Maximum flow rate (L/min)	58				85			58			85		
	最大压力 Max. pressure (Mpa)	0.44				0.69			0.44			0.69		
	流量 Flow rate(L/min)	45	30	19	65	42	20	45	30	19	65	42	20	
	全扬程 Full head (m)	10	22	30	17	35	52	10	22	30	17	35	52	
循环系统 Circulation System	出回媒管径 Outlet and return pipe diameter	DN25												
	分流器配置 Diverter configuration	4进4出 3/8” 力古 4 in 4 out 3/8 "Rigo												
冷却系统 Cooling System	冷却进出水管径 Cooling inlet and outlet pipe diameter	φ 12宝塔水咀 φ 12 pagoda water Tsui												
	冷却方式 Cooling mode	直接冷却 Direct cooling												
	冷却进出水压差 Cooling inlet and outlet pressure difference (Mpa)	≥0.05												
	冷却压力 Cooling pressure (Mpa)	使用小于100℃时，确保进水压力在0.05-0.5；使用大于100℃时，确保进水压力在0.2-0.5 When using less than 100℃, ensure that the inlet pressure is between 0.05 and 0.5; When the temperature is greater than 100 ° C, ensure that the inlet water pressure is between 0.2 and 0.5												
电 Electricity	用电规格 Electricity specification	AC380V 3P/PE 50Hz												
	主断路器容量 Main circuit breaker capacity (A)	32						63						
	总电气容量 Total electrical capacity (kW)	8.9				13.7			17.9			27.4		
	电源线 Power cord (5m long)	4 × 4.0mm				4 × 6.0mm ²			4 × 6.0mm ²			4 × 10.0mm ²		
保护功能 Protection function		电源逆相/电源缺相/水泵过电流/加热器超温媒体温度异常/温度探头断线/整机负荷保护/控制回路保护/进水压力低 Reverse phase of power supply/lack of phase of power supply/over-current of oil pump/over-temperature of heater/ abnormal media temperature/disconnection of temperature probe/load protection of whole machine/protection of control loop/low level alarm												
机箱颜色 Case color		SPCC白色烤漆 (RAL7047) 、 SPCC蓝色烤漆 (RAL5012) SPCC white baking paint (RAL7047), SPCC blue baking paint (RAL5012)												
产品净重 Product net weight (kg)		40				60			80			120		

注2：冷却能力：冷却进水大于出水0.1Mpa，冷却水温10℃，△t=60℃ Note 2: Cooling capacity: cooling inlet greater than outlet 0.1Mpa, cooling temperature 10℃, △t=60℃

配置表 Configuration Table

型号 Model	TTWE-1210	TTWE-1220	TTWE-1210	TTWE-1220
3P 380V 50HZ	●	●	●	●
3P 380V 60HZ	○	○	○	○
3P 415V 50HZ	○	○	○	○
3P 440V 60HZ	○	○	○	○
3P 480V 60HZ	○	○	○	○
分流器1进1出 Diverter 1 in and 1 out	○	○	○	○
分流器4进4出 Diverter 4 in and 4 out	●	●	●	●
分流器6进6出 Diverter 6 in and 6 out	○	○	○	○
分流器8进8出 Diverter 8 in and 8 out	—	○	—	○

注3：标配功能“●”、选配功能“○”和“—”表示无。 Note 3: Standard function "●", optional function "○" and "—" indicates none.

TCAseries

标准版Standard Version

冷凝方式（风）
使用温度范围5~30℃
Condensation method (wind)
Service temperature range5~30℃



更智能

More Intelligent

- 7寸触摸屏，显示直观，操作简便；
- 设备运行状态日志与报警日志；
- 支持预约开关机；
- RS485通讯接口，支持MODBUS RTU通讯协议。
- 7" touch screen with intuitive display and easy operation.
- Equipment operation status log and alarm log.
- Support reservation for power on/off.
- RS485 communication interface, supporting MODBUS RTU communication protocol.


更安全可靠的性能

More Safe And Reliable Performance

- 不需要搭配冷却水塔使用；
- 压缩机冷媒高低压保护；
- 压缩机过载保护；
- 风机过载保护
- 系统防冻保护；
- 泵浦逆相、欠相、过载检测；
- 搭载高效蒸发器。
- No need to use it with a cooling water tower.
- Compressor refrigerant high and low pressure protection.
- Compressor overload protection.
- Fan overload protection.
- System antifreeze protection.
- Pump reverse phase, under phase, overload detection.
- Equipped with an efficient evaporator.

外型尺寸图Dimensions

单位/Unit : mm

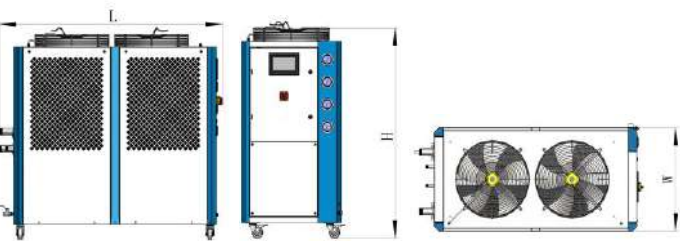

型号 Model	TCA-2	TCA-5	TCA-10	TCA-15	TCA-20	TCA-5T	TCA-10T	TCA-15T	TCA-20T	TCA-30T
L	770	1450	1600	2090	2220	1450	1600	2090	2220	2690
W	600	600	700	830	910	600	700	830	910	1160
H	935	1030	1400	1620	1830	1030	1400	1620	1830	2105
包装体积(m³)	0.43	0.90	1.70	2.80	3.70	0.90	1.70	2.80	3.70	7.00
包装尺寸(cm)	77*60*93.5	145*60*103	160*70*140	209*83*162	222*91*183	145*60*103	160*70*140	209*83*162	222*91*183	270*120*215

注1: 选配清模功能尺寸会变化，非标机型尺寸另行通知。
Note 1: The size of the optional mold clearing function will change, and the size of non-standard models will be notified.

规格Specification

型号 Model		TCA-2	TCA-5	TCA-10	TCA-15	TCA-20	TCA-5T	TCA-10T	TCA-15T	TCA-20T	TCA-30T
用电规格 Power supply		3ph-380v/50hz									
总电气容量 (kw) Total power capacity (kw)		2.6	4.8	10.0	14.1	19.0	5.0	9.4	14.2	19.1	30.3
控制方式 Control method		PID控制									
制冷剂 Refrigerant	名称 Name	R22/R407C/R410A									
制冷量 Refrigerating capacity	Kcal/h	4300	12470	24940	37410	49880	12470	24940	37410	49880	74390
	kw	5	14.5	29	43.5	58	14.5	29	43.5	58	86.5
压缩机 Compressor	类型 Type	全封闭涡旋式									
	匹数 (HP) Power (HP)	2	5	5*2	5*3	5*4	5	5*2	5*3	5*4	12*2+5
	数量 Number	1	1	2	3	4	1	2	3	4	3
冷凝器 Condenser	类型 type	微通道式									
	散热环境温度 Cooling environment temperature	≤35℃									
风机 Fan	功率 (W) Power (W)	180	180	414	550	800	180	414	550	800	1900
	数量 Number	1	2	2	2	2	2	2	2	2	3
蒸发器 Evaporator	类型 Type	水箱盘管式					壳管式				
	水箱容量(L) Water tank capacity (L)	33	50	140	170	220	30	90	130	160	240
	水箱材质 Water tank material	SUS304	PP		SUS304						
	冷冻进出水管 Chilled water inlet and outlet pipes	DN25	DN25	DN40	DN50	DN50	DN25	DN40	DN50	DN50	DN65
	冷冻水流量(m³/h) Chilled water flow (m³/h)	0.86	2.49	4.99	7.48	9.98	2.49	4.99	7.48	9.98	14.88
媒体泵 Medium Pump	功率(KW) Power (kW)	0.55	0.55	1.50	1.5/2.2	2.20	0.55	1.50	1.5/2.2	2.20	4.00
	最大流量(L/min) Maximum flow(L/min)	66	66	132	132/200	200	66	132	132/200	200	467
	最大扬程(m) Maximum lift (m)	23	23	35	35/35	35	23	35	35/35	35	39.5
保护功能 Protection function		高低压保护、过载保护、压缩机延时启动、液位过低报警、防冻保护（选配）、流量开关（选配）、热气旁通阀（选配） High and low pressure protection, overload protection, compressor delayed start, low liquid level alarm, antifreeze protection (optional), flow switch (optional), hot gas bypass valve (optional)									
产品颜色 Product Color		SPCC白色烤漆（RAL7047）、SPCC蓝色烤漆（RAL5012） SPCC white paint (RAL7047), SPCC blue paint (RAL5012)									
产品净重 (kg) Product net weight (kg)		150	175	315	460	550	165	380	450	550	750

注2: 参数为15℃出水时的设备制冷量，设备使用时冷却水温度不超过38℃且冷却水进出水压力差≥1.5Bar
Note 2: The parameter is the cooling capacity of the equipment when the water is discharged at 15 °C, Cooling water not exceeding 38 °C,cooling inlet greater than outlet ≥1.5Bar.

配置表Configuration Table

型号 Model	TCA-2	TCA-5	TCA-10	TCA-15	TCA-20	TCA-5T	TCA-10T	TCA-15T	TCA-20T	TCA-30T
3P 380V 50HZ	●	●	●	●	●	●	●	●	●	●
3P 415V 50HZ	○	○	○	○	○	○	○	○	○	○
3P 220V 50HZ	○	○	○	○	○	○	○	○	○	○
R22冷媒 R22 refrigerant	●	●	●	●	●	●	●	●	●	●
R407C冷媒 R407C refrigerant	○	○	○	○	○	○	○	○	○	○
镀锌管材质管路 Galvanized pipe material pipeline	●	●	●	●	●	●	●	●	●	●
不锈钢管材质管路 Stainless steel pipe material pipeline	○	○	○	○	○	○	○	○	○	○
漏电保护 Leakage protection	○	○	○	○	○	○	○	○	○	○
分流器1进1出	●	●	●	●	●	●	●	●	●	●
分流器4进4出 Diverter 1 in and 1 out	○	○	○	○	○	○	○	○	○	○
分流器6进6出 Diverter 4 in and 4 out	○	○	○	○	○	○	○	○	○	○
分流器8进8出 Diverter 6 in and 6 out	—	—	○	○	○	○	○	○	○	○

注3: 标配功能“●”，选配功能“○”和“—”表示无。
Note 3: Standard function "●", optional function "○" and "-" indicates none.

TCW series

标准版 Standard Version

冷凝方式（水）
使用温度范围5~30℃

Condensation method (water)
Service temperature range5~30℃

更智能

More Intelligent

- 7寸触摸屏，显示直观，操作简便；
- 设备运行状态日志与报警日志；
- 支持预约开关机；
- RS485通讯接口，支持MODBUS RTU通讯协议。
- 7" touch screen with intuitive display and easy operation.
- Equipment operation status log and alarm log.
- Support reservation for power on/off.
- RS485 communication interface, supporting MODBUS RTU communication protocol.

更安全可靠的性能

More Safe And Reliable Performance

- 压缩机冷媒高低压保护；
- 压缩机过载保护；
- 系统防冻保护；
- 泵浦逆相、欠相、过载检测；
- 搭载高效蒸发器。
- Compressor refrigerant high and low pressure protection.
- Compressor overload protection.
- System antifreeze protection.
- Pump reverse phase, under phase, and overload detection.
- Equipped with an efficient evaporator.


拓星链应用平台

Top Star Chain Application Platform

- 实时远程监控，设备运行数据统计、分析及寿命管理。
- Real-time remote monitoring, centralized equipment management: data statistics, analysis and machine life management are available.

外型尺寸图 Dimensions

单位/Unit : mm

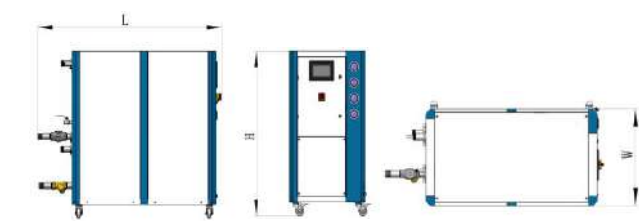

型号 Model	TCW-2	TCW-5	TCW-10	TCW-15	TCW-20	TCW-5T	TCW-10T	TCW-15T	TCW-20T	TCW-25T	TCW-30T
L	700	1100	1470	1820	2070	1250	1470	1820	2070	1530	2175
W	570	500	650	650	650	500	650	650	650	800	850
H	910	1150	1270	1270	1270	1150	1270	1270	1270	1750	1356.5
包装体积(m³)	0.36	0.6	1.2	1.5	1.7	0.6	1.2	1.5	1.7	2.2	2.77
包装尺寸(cm)	70*57*91	125*50*93.5	147*65*127	182*65*127	207*65*127	125*50*93.5	147*65*127	182*65*127	207*65*127	153*80*175	220*90*140

注1: 选配清模功能尺寸会变化，非标机型尺寸另行通知。
Note 1: The size of the optional mold clearing function will change, and the size of non-standard models will be notified.

规格 Specification

型号 Model		TCW-2	TCW-5	TCW-10	TCW-15	TCW-20	TCW-5T	TCW-10T	TCW-15T	TCW-20T	TCW-25T	TCW-30T
用电规格 Power supply		3ph-380v/50hz										
总电气容量 (kw) Total power capacity (kw)		2.5	4.5	9.4	13.7	17.5	4.7	8.5	13.0	17.5	21.2	26.5
控制方式 Control method		PID控制										
制冷剂 Refrigerant	名称 Name	R22/R407C/R410A										
	Kcal/h Kcal/h	4300	12470	24940	37410	49880	12470	24940	37410	49880	62092	74390
制冷量 Refrigerating capacity	kw kw	5	14.5	29	43.5	58	14.5	29	43.5	58	72.2	86.5
	类型 Type	全封闭涡旋式										
压缩机 Compressor	匹数 (HP) Power (HP)	2	5	5*2	5*3	5*4	5	5*2	5*3	5*4	12*2	12*2+5
	数量 Number	1	1	2	3	4	1	2	3	4	2	3
冷凝器 Condenser	类型 type	壳管式										
	散热水管径(inch) Radiation water pipe diameter(inch)	DN25	DN25	DN40	DN50	DN50	DN25	DN40	DN50	DN50	DN65	DN65
	散热水进出水压差 (Bar) Water pressure difference between inlet and outlet of radiating water	≥1.5										
	散热水流量(m³/h) Dissipation water flow(m³/h)	3.12	3.12	6.24	9.35	12.47	3.12	6.24	9.35	12.47	15.52	18.60
蒸发器 Evaporator	类型 Type	水箱盘管式					壳管式					
	水箱容量(L) Water tank capacity (L)	33	50	140	170	220	30	90	130	160	130	150
	水箱材质 Water tank material	SUS304	PP		SUS304							
	冷冻进出水管 Chilled water inlet and outlet pipes	DN25	DN25	DN40	DN50	DN50	DN25	DN40	DN50	DN50	DN65	DN65
媒体泵 Medium Pump	冷冻水流量(m³/h) Chilled water flow (m³/h)	0.86	2.49	4.99	7.48	9.98	2.49	4.99	7.48	9.98	12.42	14.88
	功率(KW) Power (kW)	0.55	0.55	1.5	1.5/2.2	2.20	0.55	1.5	1.5/2.2	2.20	4.00	4.00
	最大流量(L/min) Maximum flow(L/min)	66	66	132	132/200	200	66	132	132/200	200	467	467
	最大扬程(m) Maximum lift (m)	23	23	35	35/35	35	23	35	35/35	35	41.2	39.5
保护功能 Protection function		高低压保护、过载保护、压缩机延时启动、液位过低报警、防冻保护（选配）、流量开关（选配）、热气旁通阀（选配） High and low pressure protection, overload protection, compressor delayed start, low liquid level alarm, antifreeze protection (optional), flow switch (optional), hot gas bypass valve (optional)										
产品颜色 Product Color		SPCC白色烤漆（RAL7047）、SPCC蓝色烤漆（RAL5012） SPCC white paint (RAL7047), SPCC blue paint (RAL5012)										
产品净重 (kg) Product net weight (kg)		110	150	280	410	520	160	280	380	480	580	680

注2: 参数为15℃出水时的设备制冷量，设备使用时冷却水温度不超过38℃且冷却水进出水压力差≥1.5Bar
Note 2: The parameter is the cooling capacity of the equipment when the water is discharged at 15 °C, Cooling water not exceeding 38 °C,cooling inlet greater than outlet ≥1.5Bar.

配置表 Configuration Table

型号 Model	TCW-2	TCW-5	TCW-10	TCW-15	TCW-20	TCW-5T	TCW-10T	TCW-15T	TCW-20T	TCW-25T	TCW-30T
3P 380V 50HZ	●	●	●	●	●	●	●	●	●	●	●
3P 415V 50HZ	○	○	○	○	○	○	○	○	○	○	○
3P 220V 50HZ	○	○	○	○	○	○	○	○	○	○	○
R22冷媒 R22 refrigerant	●	●	●	●	●	●	●	●	●	●	●
R407C冷媒 R407C refrigerant	○	○	○	○	○	○	○	○	○	○	○
镀锌管材质管路 Galvanized pipe material pipeline	●	●	●	●	●	●	●	●	●	●	●
不锈钢管材质管路 Stainless steel pipe material pipeline	○	○	○	○	○	○	○	○	○	○	○
漏电保护 Leakage protection	○	○	○	○	○	○	○	○	○	○	○
分流器1进1出	●	●	●	●	●	●	●	●	●	●	●
分流器4进4出 Diverter 1 in and 1 out	○	○	○	○	○	○	○	○	○	○	○
分流器6进6出 Diverter 4 in and 4 out	○	○	○	○	○	○	○	○	○	○	○
分流器8进8出 Diverter 6 in and 6 out	-	-	○	○	○	○	○	○	○	○	○

注3: 标配功能“●”，选配功能“○”和“-”表示无。 Note 3: Standard function "●", optional function "○" and "-" indicates none.

AFTER-SALE SERVICE

售后服务



快速响应

快速响应客户的需求，收集客户的现场信息并记录故障，给出保养合理化建议；

Fast Response
Quickly respond to customer needs, collect customer site information and record the failure, give reasonable maintenance Suggestions;



快速到达

快速到达客户现场，进行设备维修；

Fast Arrival
Quickly arrive at customer site for equipment maintenance;



快速处理

快速处理，帮助客户第一时间将设备调整到最佳状态；

Fast Processing
Quickly processing to help customers adjust the equipment to the best state in the first time;



快速验收

快速完成服务项目验收。

Fast Acceptance
Quickly complete the service project acceptance.