Loops & Conditional Tracing

While, For, Nested Loops, Break/Continue & State Updates

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: For Loop with Condition
Q1. What will be the output of the following pseudocode? Set Integer s = 0 for i = 1 to 10 step 1 do if (i % 3 != 0) s = s + i end-if end-for display s
(A) 30
(B) 37
(C) 42
(D) 45
Correct Answer: Option (B) : 37
Logic / Derivation: Total 1..10=55; multiples of 3 are 3+6+9=18; 55–18=37.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Nested Loop
Q2. What will be the output of the following pseudocode? Set Integer c = 0 for i = 1 to 4 step 1 do for j = 1 to 5 step 1 do if (i + j == 6) c = c + 1 end-if end-for end-for display c
(A) 2
(B) 3
(C) 4
(D) 5
Correct Answer: Option (C) : 4
Logic / Derivation: Pairs are (1,5),(2,4),(3,3),(4,2): 4.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Nested Loop Sum
Q3. What will be the output of the following pseudocode? Set Integer s = 0 for i = 1 to 3 step 1 do for j = 1 to i + 1 step 1 do s = s + j end-for end-for display s
(A) 17
(B) 18
(C) 19
(D) 20
Correct Answer: Option (C) : 19
Logic / Derivation: For i=1,2,3 the inner sums are 3,6,10; total=19. Infosys Medium Pseudocode Practice • Page 36

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: While Loop
Q4. What will be the output of the following pseudocode? Set Integer x = 5 Set Integer s = 0 while (x <= 25) s = s + x x = x + 5 end-while display s
(A) 50
(B) 60
(C) 75
(D) 80
Correct Answer: Option (C) : 75
Logic / Derivation: Execution Trace: 1. Initialize loop variables and verify loop condition on each pass. 2. Execute loop body and apply state modifications. 3. Terminate when the guard condition evaluates to false. 4. The final variable state upon loop termination produces Option (C) (75).

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Break in Nested Loop
Q5. What will be the output of the following pseudocode? Set Integer c = 0 for i = 1 to 4 step 1 do for j = 1 to 4 step 1 do if (j == 3) break end-if c = c + 1 end-for end-for display c
(A) 4
(B) 6
(C) 8
(D) 12
Correct Answer: Option (C) : 8
Logic / Derivation: The inner loop adds 1 for j=1 and j=2, then breaks at j=3. 4×2=8.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Continue
Q6. What will be the output of the following pseudocode? Set Integer s = 0 for i = 1 to 8 step 1 do if (i % 3 == 0) continue end-if s = s + i end-for display s
(A) 24
(B) 27
(C) 30
(D) 33
Correct Answer: Option (B) : 27
Logic / Derivation: 1..8 sum=36; skip 3 and 6, so 36–9=27.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Reverse Loop
Q7. What will be the output of the following pseudocode? Set Integer s = 0 for i = 12 to 2 step -2 do s = s + i / 2 end-for display s
(A) 18
(B) 21
(C) 24
(D) 27
Correct Answer: Option (B) : 21
Logic / Derivation: Values of i/2: 6,5,4,3,2,1; sum=21.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Loop with Changing Step
Q8. What will be the output of the following pseudocode? Set Integer i = 1 Set Integer s = 0 while (i < 20) s = s + i i = i * 2 + 1 end-while display s
(A) 24
(B) 26
(C) 28
(D) 30
Correct Answer: Option (B) : 26
Logic / Derivation: i values are 1,3,7,15; sum=26.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Nested Loop Count
Q9. What will be the output of the following pseudocode? Set Integer c = 0 for i = 1 to 5 step 1 do for j = i to 5 step 1 do c = c + 1 end-for end-for display c
(A) 10
(B) 12
(C) 15
(D) 20
Correct Answer: Option (C) : 15
Logic / Derivation: Counts are 5+4+3+2+1=15.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Loop with Modulo
Q10. What will be the output of the following pseudocode? Set Integer s = 0 for i = 2 to 14 step 2 do if (i % 4 == 0) s = s + i end-if end-for display s
(A) 12
(B) 16
(C) 20
(D) 24
Correct Answer: Option (D) : 24
Logic / Derivation: Multiples of 4 are 4,8,12; sum=24.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Nested Conditional Loop
Q11. What will be the output of the following pseudocode? Set Integer s = 0 for i = 1 to 5 step 1 do if (i % 2 == 1) for j = 1 to i step 2 do s = s + j end-for end-if end-for display s
(A) 12
(B) 14
(C) 16
(D) 18
Correct Answer: Option (B) : 14
Logic / Derivation: For i=1,3,5 the inner sums are 1,4,9; total=14. Infosys Medium Pseudocode Practice • Page 37

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Loop State
Q12. What will be the output of the following pseudocode? Set Integer x = 3 for i = 1 to 4 step 1 do x = x + i x = x - 1 end-for display x
(A) 8
(B) 9
(C) 10
(D) 11
Correct Answer: Option (B) : 9
Logic / Derivation: Each iteration changes x by i–1. Total change=0+1+2+3=6; final x=9.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Loop Product
Q13. What will be the output of the following pseudocode? Set Integer p = 1 for i = 2 to 8 step 2 do p = p * (i / 2) end-for display p
(A) 12
(B) 24
(C) 36
(D) 48
Correct Answer: Option (B) : 24
Logic / Derivation: Factors are 1,2,3,4; product=24.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: While + Modulo
Q14. What will be the output of the following pseudocode? Set Integer n = 29 Set Integer c = 0 while (n > 0) if (n % 2 == 1) c = c + 1 end-if n = n / 2 end-while display c
(A) 2
(B) 3
(C) 4
(D) 5
Correct Answer: Option (B) : 3
Logic / Derivation: Binary 29 is 11101, containing four 1s.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Nested Loop Arithmetic
Q15. What will be the output of the following pseudocode? Set Integer s = 0 for i = 1 to 3 step 1 do for j = 1 to 3 step 1 do s = s + i * j end-for end-for display s
(A) 12
(B) 18
(C) 24
(D) 36
Correct Answer: Option (D) : 36
Logic / Derivation: The double sum factorizes: (1+2+3)×(1+2+3)=6×6=36.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Break with Sum
Q16. What will be the output of the following pseudocode? Set Integer s = 0 for i = 2 to 12 step 2 do s = s + i if (s > 15) break end-if end-for display s
(A) 12
(B) 18
(C) 20
(D) 24
Correct Answer: Option (B) : 18
Logic / Derivation: Running sums: 2,6,12,20; break after 20.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Continue with Product
Q17. What will be the output of the following pseudocode? Set Integer p = 1 for i = 1 to 6 step 1 do if (i % 2 == 0) continue end-if p = p * i end-for display p
(A) 9
(B) 12
(C) 15
(D) 20
Correct Answer: Option (C) : 15
Logic / Derivation: Odd values 1,3,5 are multiplied: 1×3×5=15.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Loop with Shift
Q18. What will be the output of the following pseudocode? Set Integer s = 0 for i = 1 to 4 step 1 do s = s + (i << 1) end-for display s
(A) 16
(B) 18
(C) 20
(D) 24
Correct Answer: Option (C) : 20
Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to Option (C) (20).

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Loop with Right Shift
Q19. What will be the output of the following pseudocode? Set Integer s = 0 for i = 8 to 32 step 8 do s = s + (i >> 2) end-for display s
(A) 15
(B) 18
(C) 20
(D) 24
Correct Answer: Option (C) : 20
Logic / Derivation: The shifted values are 2,4,6,8; sum=20. Infosys Medium Pseudocode Practice • Page 38

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Nested Loop with Break
Q20. What will be the output of the following pseudocode? Set Integer c = 0 for i = 1 to 4 step 1 do for j = 1 to 4 step 1 do c = c + 1 if (c == 7) break end-if end-for end-for display c
(A) 7
(B) 8
(C) 12
(D) 13
Correct Answer: Option (D) : 13
Logic / Derivation: The counter continues across outer iterations. It reaches 7, breaks the current inner loop, then continues; 4 more inner iterations occur, so final c=13.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Loop and Comparison
Q21. What will be the output of the following pseudocode? Set Integer c = 0 for i = 1 to 9 step 1 do if (i * i < 50) c = c + 1 end-if end-for display c
(A) 6
(B) 7
(C) 8
(D) 9
Correct Answer: Option (B) : 7
Logic / Derivation: i=1..7 satisfy $i^2<50$; count=7.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Function with Loop
Q22. What will be the output of the following pseudocode? Integer f(Integer n) Set Integer s = 1 for i = 1 to n step 1 do s = s + i end-for return s End function display f(6)
(A) 20
(B) 21
(C) 22
(D) 23
Correct Answer: Option (C) : 22
Logic / Derivation: Execution Trace: 1. Identify base cases for termination. 2. Trace recursive function call stack and branch expansions. 3. Evaluate leaf returns and unwind the call stack bottom-up. 4. Summing/accumulating the return values yields Option (C) (22).

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Function Condition
Q23. What will be the output of the following pseudocode? Integer f(Integer n) if (n % 4 == 0) return n / 2 else return n + 4 end-if End function display f(14)
(A) 9
(B) 14
(C) 18
(D) 28
Correct Answer: Option (C) : 18
Logic / Derivation: 14 is not divisible by 4, so 14+4=18. Infosys Medium Pseudocode Practice • Page 42

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Function Digit Logic
Q24. What will be the output of the following pseudocode? Integer f(Integer n) Set Integer s = 0 while (n > 0) s = s + n % 10 n = n / 10 end-while return s End function display f(386)
(A) 14
(B) 15
(C) 16
(D) 17
Correct Answer: Option (D) : 17
Logic / Derivation: Execution Trace: 1. Identify base cases for termination. 2. Trace recursive function call stack and branch expansions. 3. Evaluate leaf returns and unwind the call stack bottom-up. 4. Summing/accumulating the return values yields Option (D) (17).

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Function Nested
Q25. What will be the output of the following pseudocode? Integer g(Integer x) return x * 2 End function Integer f(Integer x) return g(x) + g(x+1) End function display f(4)
(A) 16
(B) 18
(C) 20
(D) 22
Correct Answer: Option (B) : 18
Logic / Derivation: g(4)=8 and g(5)=10; total=18.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Function Loop Product
Q26. What will be the output of the following pseudocode? Integer f(Integer n) Set Integer p = 1 for i = 1 to n step 1 do if (i % 2 == 0) p = p * i end-if end-for return p End function display f(6)
(A) 24
(B) 36
(C) 48
(D) 60
Correct Answer: Option (C) : 48
Logic / Derivation: Multiply even values 2×4×6=48.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Function with Loop and Shift
Q27. What will be the output of the following pseudocode? Integer f(Integer n) Set Integer s = 0 for i = 1 to n step 1 do s = s + (i << 1) end-for return s End function display f(5)
(A) 20
(B) 25
(C) 30
(D) 35
Correct Answer: Option (C) : 30
Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to Option (C) (30).

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Mixed Loop + XOR
Q28. What will be the output of the following pseudocode? Set Integer x = 0 for i = 1 to 5 step 1 do x = x ^ i end-for display x
(A) 0
(B) 1
(C) 2
(D) 3
Correct Answer: Option (A) : 0
Logic / Derivation: 0^1=1, ^2=3, ^3=0, ^4=4, ^5=1.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Mixed Loop + AND
Q29. What will be the output of the following pseudocode? Set Integer x = 15 for i = 1 to 3 step 1 do x = x & (14 - i) end-for display x
(A) 8
(B) 10
(C) 12
(D) 14
Correct Answer: Option (B) : 10
Logic / Derivation: x=15&13=13; 13&12=12; 12&11=8.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Mixed Nested Loop + Modulo
Q30. What will be the output of the following pseudocode? Set Integer c = 0 for i = 1 to 4 step 1 do for j = 1 to 4 step 1 do if ((i + j) % 3 == 0) c = c + 1 end-if end-for end-for display c
(A) 4
(B) 5
(C) 6
(D) 7
Correct Answer: Option (B) : 5
Logic / Derivation: Pairs with sum divisible by 3: 5 pairs. Correct answer B.

[OnlineStudy4U 100 Medium-Level MCQs]
Topic: Mixed Nested Conditions
Q31. What will be the output of the following pseudocode? Set Integer a = 9 Set Integer b = 6 Set Integer c = 3 if (a > b) if ((a - b) == c) display a + b + c else display a - b end-if else display b + c end-if
(A) 12
(B) 15
(C) 18
(D) 21
Correct Answer: Option (C) : 18
Logic / Derivation: 9>6 and 9–6=3, so the nested condition is true; 9+6+3=18.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q32. How many times does the loop body run, and what is printed? Integer i, count Set i = 1, count = 0 while i < 20 do i = i * 2 count = count + 1 end while Print count
(A) 3
(B) 4
(C) 5
(D) 6
Correct Answer: Option (C) : 5
Logic / Derivation: Trace i and count: start i=1. Pass 1: i=2, count=1. Pass 2: i=4, count=2. Pass 3: i=8, count=3. Pass 4: i=16, count=4. Pass 5: i=32, count=5. Now i=32 is not less than 20, so the loop stops. Printed value is 5.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q33. What is the output of the following Pseudo Code? Integer x, i Set x = 0 for i = 1 to 6 do if i % 2 == 0 then continue end if x = x + i end for Print x
(A) 9
(B) 12
(C) 16
(D) 21
Correct Answer: Option (A) : 9
Logic / Derivation: continue skips even values of i. The loop runs i = 1 to 6, so only the odd values 1, 3 and 5 are added. x = 1 + 3 + 5 = 9.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q34. What is printed by the following Pseudo Code? Integer i, j, count Set count = 0 for i = 1 to 4 do for j = 1 to i do count = count + 1 end for end for Print count
(A) 4
(B) 8
(C) 10
(D) 16
Correct Answer: Option (C) : 10
Logic / Derivation: The inner loop runs i times for each i from 1 to 4. Total iterations = 1+2+3+4 = 10. So count prints 10.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q35. A queue follows FIFO. What is printed by the following Pseudo Code? Queue Q enqueue(Q, 2) enqueue(Q, 4) enqueue(Q, 6) dequeue(Q) enqueue(Q, 8) Print front(Q)
(A) 2
(B) 4
(C) 6
(D) 8
Correct Answer: Option (B) : 4
Logic / Derivation: After three enqueues the queue is [2, 4, 6] with 2 at the front. dequeue removes 2. enqueue 8 makes [4, 6, 8]. front returns 4.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q36. A stack follows LIFO. What is printed by the following Pseudo Code? Stack S push(S, 5) push(S, 8) push(S, 3) pop(S) push(S, 7) Print peek(S)
(A) 3
(B) 5
(C) 7
(D) 8
Correct Answer: Option (C) : 7
Logic / Derivation: Stack after the three pushes: [5, 8, 3] with 3 on top. pop removes 3. push 7 makes the stack [5, 8, 7]. peek returns the top element, which is 7.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q37. What is printed? Integer n, d Set n = 48, d = 0 while n > 1 do n = n / 2 d = d + 1 end while Print d
(A) 3
(B) 4
(C) 5
(D) 6
Correct Answer: Option (C) : 5
Logic / Derivation: 48→24→12→6→3→1. That is five divisions. d = 5. (Integer division: 3/2=1.)

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q38. What is printed? Integer A[5] = {2, 4, 6, 8, 10} Integer i, s Set s = 0 for i = 0 to 4 do if A[i] % 4 == 0 then s = s + A[i] end for Print s
(A) 12
(B) 18
(C) 24
(D) 30
Correct Answer: Option (A) : 12
Logic / Derivation: Values divisible by 4 are 4 and 8. s = 4 + 8 = 12.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q39. What does G(4) return? Function G(n) if n <= 1 then return 1 return n * G(n - 1) End Function Print G(4)
(A) 10
(B) 16
(C) 24
(D) 64
Correct Answer: Option (C) : 24
Logic / Derivation: G is factorial. G(4)=4×3×2×1=24.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q40. [Loops] What is printed? Integer i, s Set s = 0 for i = 1 to 10 do if i % 2 == 1 then s = s + i end for Print s
(A) 25
(B) 30
(C) 45
(D) 55
Correct Answer: Option (A) : 25
Logic / Derivation: The loop adds the odd values 1+3+5+7+9 = 25.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q41. [Loops] What is printed? Integer i, p Set p = 1 for i = 1 to 4 do p = p * i end for Print p
(A) 10
(B) 16
(C) 24
(D) 120
Correct Answer: Option (C) : 24
Logic / Derivation: p multiplies 1×2×3×4 = 24.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q42. What does R(6) return? Function R(n) if n < 3 then return n return R(n - 1) + 2 End Function Print R(6)
(A) 6
(B) 8
(C) 10
(D) 12
Correct Answer: Option (C) : 10
Logic / Derivation: R(2)=2. Each later call adds 2. R(6)=2 + 2×4 = 10.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q43. What is printed? Integer i, c Set c = 0 for i = 1 to 8 do if i % 2 == 0 then c = c + i end for Print c
(A) 16
(B) 18
(C) 20
(D) 36
Correct Answer: Option (C) : 20
Logic / Derivation: Even values 2+4+6+8 = 20.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q44. What does U(4) return? Function U(n) if n == 0 then return 1 return n + U(n - 1) End Function Print U(4)
(A) 8
(B) 9
(C) 11
(D) 24
Correct Answer: Option (C) : 11
Logic / Derivation: U(0)=1, then +1+2+3+4 = 11.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q45. What is printed? Integer i, n Set n = 0 for i = 1 to 6 do if i % 3 == 0 then n = n + i end for Print n
(A) 6
(B) 9
(C) 12
(D) 21
Correct Answer: Option (B) : 9
Logic / Derivation: Multiples of 3 from 1 to 6 are 3 and 6. Sum = 9.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q46. What is printed? Integer i, t Set t = 1 for i = 1 to 5 do t = t * 2 end for Print t
(A) 10
(B) 16
(C) 32
(D) 64
Correct Answer: Option (C) : 32
Logic / Derivation: Start 1, multiply by 2 five times: 32.

[OnlineStudy4U Master E-Book 4]
Topic: Pseudocode Execution Tracing
Q47. What does W(5) return? Function W(n) if n <= 1 then return 2 return W(n - 1) + 3 End Function Print W(5)
(A) 11
(B) 14
(C) 15
(D) 17
Correct Answer: Option (B) : 14
Logic / Derivation: W(1)=2. Add 3 four times: 2+12=14.

[Campus Monk Day 04 Mock Test]
Topic: Campus Monk Mock Pseudocode
Q48. 1. What will be the output of the following pseudo code? Input m = 9,n = 6, m= m + 1; n= n - 1; m= m + n; if(m>n) print m else print n
(A) 5
(B) 7
(C) 9
(D) 12
Correct Answer: Option (A) : 5
Logic / Derivation: Execution Trace: 1. Trace variable allocations and sequential statement assignments. 2. Evaluate conditional branches and execute the active branch. 3. Compute final expression for display. 4. The evaluated result matches Option (A) (5).

[Campus Monk Day 04 Mock Test]
Topic: Campus Monk Mock Pseudocode
Q49. 1. What will be the output of the following pseudocode? Integer i Set i = 3 do print i + 3 i = i - 1 while(i not equals 0) end while
(A) 6 6 6
(B) 6 5 6
(C) 5 5 5
(D) 6 5 4
Correct Answer: Option (D) : 6 5 4
Logic / Derivation: Execution Trace: 1. Initialize loop variables and verify loop condition on each pass. 2. Execute loop body and apply state modifications. 3. Terminate when the guard condition evaluates to false. 4. The final variable state upon loop termination produces Option (D) (6 5 4).

[Campus Monk Day 04 Mock Test]
Topic: Campus Monk Mock Pseudocode

Q50. 1. If the sequence of operations are performed on a stack, the sequence of pop will be? Push(1), Push(2), Pop(), Push(1), Push(2), Pop(), Pop(), Pop(), Push(2), Pop().

(A) 2 2 1 1 2
(B) 2 2 1 2 2
(C) 2 1 2 2 1
(D) 2 1 2 2 2

Correct Answer: Option (A) : 2 2 1 1 2

Logic / Derivation: Execution Trace: 1. Initialize loop variables and verify loop condition on each pass. 2. Execute loop body and apply state modifications. 3. Terminate when the guard condition evaluates to false. 4. The final variable state upon loop termination produces Option (A) (2 2 1 1 2).

[Campus Monk Day 04 Mock Test]
Topic: Campus Monk Mock Pseudocode

Q51. T The concatenation of two lists is to be performed in O(1) time. Which of the following implementation of a list should be used?

(A) a) Singly linked list
(B) a) Doubly linked list
(C) a) Circular doubly linked list
(D) a) Array implementation of list

Correct Answer: Option (C) : a) Circular doubly linked list

Logic / Derivation: Execution Trace: 1. Initialize loop variables and verify loop condition on each pass. 2. Execute loop body and apply state modifications. 3. Terminate when the guard condition evaluates to false. 4. The final variable state upon loop termination produces Option (C) (a) Circular doubly linked list).

[Campus Monk Day 04 Mock Test]
Topic: Campus Monk Mock Pseudocode

Q52. 1. Find the output of the following pseudo code. Integer x,y,z Set x=9, y=2, z=1 if (x+y > 8) if (7> x+z) z=7 End if If (9> x-z) z=9 End if y=y+z+1 End if Print x+y+z

(A) 31
(B) 11
(C) 42
(D) 30

Correct Answer: Option (D) : 30

Logic / Derivation: Execution Trace: 1. Trace variable allocations and sequential statement assignments. 2. Evaluate conditional branches and execute the active branch. 3. Compute final expression for display. 4. The evaluated result matches Option (D) (30).

[Campus Monk Day 06 Mock Test]
Topic: Campus Monk Mock Pseudocode

Q53. How many times campus monk will be printed? Set k = 1, p = 4 Int j = p + k / 2 If (j equals p) Print "campus monk" End if j = p + k / 5 If (j not equal p) Print "campus monk" End if Print "campus monk"

(A) 1 Times
(B) 2 Times
(C) 3 Times
(D) 4 Times

Correct Answer: Option (B) : 2 Times

Logic / Derivation: Execution Trace: 1. Trace variable allocations and sequential statement assignments. 2. Evaluate conditional branches and execute the active branch. 3. Compute final expression for display. 4. The evaluated result matches Option (B) (2 Times).

[Campus Monk Day 06 Mock Test]
Topic: Campus Monk Mock Pseudocode

Q54. What will be the output of the following pseudocode? Initial values: a = 4, b = 4, c = 7 Int fun(int a, int b, int c) { For (each c from 3 to 5) { a = (c + c) ^ b; If ((a + c) < (c + a)) { b = (a + 11) + c; } Else { c = b + b; a = 3 + b; continue; } } Return a + b; }

(A) 10
(B) 12
(C) Error
(D) 11

Correct Answer: Option (D) : 11

Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to Option (D) (11).

[Campus Monk Day 07 Mock Test]
Topic: Campus Monk Mock Pseudocode

Q55. Predict the output of the given pseudocode if the value of the number is 6: Read number k = 2 i = 2 while i <= number: k = k * i i = i + 1 end while write k

(A) 1440.0
(B) 1340.0
(C) 1700.0
(D) 1560.0

Correct Answer: Option (A) : 1440.0

Logic / Derivation: Execution Trace: 1. Initialize loop variables and verify loop condition on each pass. 2. Execute loop body and apply state modifications. 3. Terminate when the guard condition evaluates to false. 4. The final variable state upon loop termination produces Option (A) (1440.0).

[Campus Monk Day 08 Mock Test]
Topic: Campus Monk Mock Pseudocode

Q56. Q1.) Integer p, q, r Set p = 0, q = 2, r = 9 r = 7 + p q = q + r for (each r from 4 to 7) p = (p + p) & q if ((p + q) < (r - p) || 8 < p) p = (p + 2) + q Jump out of the loop End if End for Print p + q

(A) 5
(B) 9
(C) 19
(D) 20

Correct Answer: Option (B) : 9

Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to Option (B) (9).

[Campus Monk Day 08 Mock Test]
Topic: Campus Monk Mock Pseudocode

Q57. Q3.) Integer value, n Set value = 1, n = 45 while (value less than equal to n) value = value << 1 end loop Print value

(A) 16
(B) 32
(C) 64
(D) 36

Correct Answer: Option (C) : 64

Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to Option (C) (64).

[Campus Monk Day 08 Mock Test]
Topic: Campus Monk Mock Pseudocode

Q58. Q6. What is the output for p=15 and q=4. Integer solve (Integer p, Integer q) Integer value while(q) value = p MOD q p = q q = value End while return p End function solve()

(A) 3
(B) 1
(C) 2
(D) 0

Correct Answer: Option (B) : 1

Logic / Derivation: Execution Trace: 1. Identify base cases for termination. 2. Trace recursive function call stack and branch expansions. 3. Evaluate leaf returns and unwind the call stack bottom-up. 4. Summing/accumulating the return values yields Option (B) (1).

[Campus Monk Day 08 Mock Test]
Topic: Campus Monk Mock Pseudocode

Q59. Q9. What is the output for x = 10, y = 5 Integer solve(Integer x, Integer y) if(y > 0) if(x > 0) return x + y + solve(2, y - 5) + solve(x - 10, 1) End if End if return x + y End function

(A) undefined

Correct Answer: Option (A)

Logic / Derivation: Execution Trace: 1. Identify base cases for termination. 2. Trace recursive function call stack and branch expansions. 3. Evaluate leaf returns and unwind the call stack bottom-up. 4. Summing/accumulating the return values yields .

[Campus Monk Day 08 Mock Test]
Topic: Campus Monk Mock Pseudocode

Q60. Q10. What is the output of following Integer value, n Set value = 32, n = 1 while(value >= n) value = value >> 1 end loop Print value

(A) undefined

Correct Answer: Option (A)

Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to .

[Campus Monk Day 09 Mock Test]
Topic: Campus Monk Mock Pseudocode
Q61. What is the output of following pseudo code: Fun() { Int a=10 , b=20 , c=30; If(c>b>a) Print("True"); Else Print("False"); return 0; }
(A) True
(B) False
(C) Error
(D) -1
Correct Answer: Option (B) : False
Logic / Derivation: Execution Trace: 1. Identify base cases for termination. 2. Trace recursive function call stack and branch expansions. 3. Evaluate leaf returns and unwind the call stack bottom-up. 4. Summing/accumulating the return values yields Option (B) (False).

[Campus Monk Day 09 Mock Test]
Topic: Campus Monk Mock Pseudocode
Q62. What is the output of following: Integer x, y Set x = 15, y = 12 y = x – 1 do{ Print x x = y + (x – 2) } while(x < 40) end do while
(A) 14 26
(B) 15 27 39
(C) 27 39
(D) 15
Correct Answer: Option (B) : 15 27 39
Logic / Derivation: Execution Trace: 1. Initialize loop variables and verify loop condition on each pass. 2. Execute loop body and apply state modifications. 3. Terminate when the guard condition evaluates to false. 4. The final variable state upon loop termination produces Option (B) (15 27 39).

[Campus Monk Day 09 Mock Test]
Topic: Campus Monk Mock Pseudocode
Q63. What is the output if fun(5) is called? Function fun(n) If n == 0 Return 0 Else Print(n) Return fun(n + 1) End If End Function
(A) 1 2 3 4 5
(B) 5 4 3 2 1
(C) Stack overflow
(D) -1
Correct Answer: Option (C) : Stack overflow
Logic / Derivation: Execution Trace: 1. Identify base cases for termination. 2. Trace recursive function call stack and branch expansions. 3. Evaluate leaf returns and unwind the call stack bottom-up. 4. Summing/accumulating the return values yields Option (C) (Stack overflow).

[College ITM Mock Paper 1]
Topic: Infosys SE College Mock Test
Q64. What is printed? x = 45; count = 0; while (x != 0) { x = x & (x - 1); count++; } print(count ^ (45 >> 2))
(A) 4
(B) 11
(C) 15
(D) 7
Correct Answer: Option (A)
Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to .

[College ITM Mock Paper 1]
Topic: Infosys SE College Mock Test
Q65. What is printed? s = 0 for i = 1 to 5 for j = i to 5 if ((i + j) % 3 == 0) continue if (j == 5) break s = s + i * j end for end for print(s)
(A) 38
(B) 42
(C) 46
(D) 50
Correct Answer: Option (A)
Logic / Derivation: Execution Trace: 1. Initialize loop variables and verify loop condition on each pass. 2. Execute loop body and apply state modifications. 3. Terminate when the guard condition evaluates to false. 4. The final variable state upon loop termination produces .

[College ITM Mock Paper 2]
Topic: Infosys SE College Mock Test
Q66. What is printed? (x and y are unsigned integers) x = 58; y = 0; while (x > 0) { y = (y << 1) | (x & 1); x = x >> 1; } print(y)
(A) 23
(B) 29
(C) 37
(D) 41
Correct Answer: Option (A)
Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to .

[College ITM Mock Paper 2]
Topic: Infosys SE College Mock Test
Q67. What is printed? s = 0 for i = 1 to 4 for j = 1 to 4 if (i == j) continue if (i + j > 6) break s = s + (i * j) end for end for print(s)
(A) 40
(B) 44
(C) 46
(D) 48
Correct Answer: Option (A)
Logic / Derivation: Execution Trace: 1. Initialize loop variables and verify loop condition on each pass. 2. Execute loop body and apply state modifications. 3. Terminate when the guard condition evaluates to false. 4. The final variable state upon loop termination produces .

[College ITM Mock Paper 2]
Topic: Infosys SE College Mock Test
Q68. A queue is used (FIFO). What is printed? enqueue(2); enqueue(4); enqueue(6); a = dequeue(); enqueue(a + 10); b = dequeue(); c = dequeue(); print(b + c)
(A) 10
(B) 16
(C) 18
(D) 22
Correct Answer: Option (A) : 10
Logic / Derivation: Execution Trace: 1. Trace variable allocations and sequential statement assignments. 2. Evaluate conditional branches and execute the active branch. 3. Compute final expression for display. 4. The evaluated result matches Option (A) (10).

[College ITM Mock Paper 3]
Topic: Infosys SE College Mock Test
Q69. A stack is used (LIFO). What is printed?
(A) 39
(B) 33
(C) 42
(D) 30
Correct Answer: Option (A) : 39
Logic / Derivation: Execution Trace: 1. Trace variable allocations and sequential statement assignments. 2. Evaluate conditional branches and execute the active branch. 3. Compute final expression for display. 4. The evaluated result matches Option (A) (39).

[College ITM Mock Paper 4]
Topic: Infosys SE College Mock Test
Q70. This algorithm reverses the first k elements of a queue using a stack. What is printed? queue = [1, 2, 3, 4, 5] stack = [] k = 3 for i = 1 to k push(stack, dequeue(queue)) end for while (stack is not empty) enqueue(queue, pop(stack)) end while for i = 1 to (5 - k) enqueue(queue, dequeue(queue)) end for print(queue)
(A) [3, 2, 1, 4, 5]
(B) [1, 2, 3, 4, 5]
(C) [5, 4, 3, 2, 1]
(D) [3, 2, 1, 5, 4]
Correct Answer: Option (A)
Logic / Derivation: Execution Trace: 1. Initialize loop variables and verify loop condition on each pass. 2. Execute loop body and apply state modifications. 3. Terminate when the guard condition evaluates to false. 4. The final variable state upon loop termination produces .

[College ITM Mock Paper 5]
Topic: Infosys SE College Mock Test

Q71. What is printed? (>>=right shift, <<=left shift, &=AND, ^=XOR) x = 0; for i = 0 to 7 if (((45 >> i) & 1) == 1) x = x + (1 << (7 - i)) end if end for y = x ^ 45 print(y)

(A) 153
(B) 180
(C) 135
(D) 171

Correct Answer: Option (A)

Logic / Derivation: Execution Trace: 1. Evaluate bitwise expressions following precedence (shifts before bitwise logic). 2. Convert operands to binary form and apply bitwise operations bit-by-bit. 3. Perform remaining arithmetic updates on the accumulated values. 4. The final printed output evaluates to .

[College ITM Mock Paper 6]
Topic: Infosys SE College Mock Test

Q72. What is printed? s = 0 for i = 1 to 5 for j = 1 to 5 if ((i + j) % 4 == 0) continue if (j > i + 1) break s = s + i * j end for end for print(s)

(A) 142
(B) 138
(C) 146
(D) 150

Correct Answer: Option (A)

Logic / Derivation: Execution Trace: 1. Initialize loop variables and verify loop condition on each pass. 2. Execute loop body and apply state modifications. 3. Terminate when the guard condition evaluates to false. 4. The final variable state upon loop termination produces .

[College ITM Mock Paper 6]
Topic: Infosys SE College Mock Test

Q73. The following sorts a stack using a temporary stack (the top of a stack is its last element). How many times is an element moved from tmp back to st? st = [3, 1, 4, 2]; tmp = []; moves = 0 while (st is not empty) t = pop(st) while (tmp is not empty and top(tmp) > t) push(st, pop(tmp)) moves = moves + 1 end while push(tmp, t) end while print(moves)

(A) 3
(B) 2
(C) 4
(D) 5

Correct Answer: Option (A)

Logic / Derivation: Execution Trace: 1. Initialize loop variables and verify loop condition on each pass. 2. Execute loop body and apply state modifications. 3. Terminate when the guard condition evaluates to false. 4. The final variable state upon loop termination produces .

[College ITM Mock Paper 6]
Topic: Infosys SE College Mock Test

Q74. What is printed? (dynamic programming for the minimum number of coins; INF is a very large number) coins = [1, 3, 4] dp[0] = 0; dp[1..6] = INF for i = 1 to 6 for each c in coins if (i >= c) dp[i] = min(dp[i], dp[i - c] + 1) end if end for end for print(dp[6])

(A) 2
(B) 3
(C) 4
(D) 6

Correct Answer: Option (A)

Logic / Derivation: Execution Trace: 1. Initialize loop variables and verify loop condition on each pass. 2. Execute loop body and apply state modifications. 3. Terminate when the guard condition evaluates to false. 4. The final variable state upon loop termination produces .

[OnlineStudy4U Live Mock: INFOSYS TEST SERIES-1]
Topic: Pseudo Code

What will be the output of the following pseudocode?

```
Integer a, b, d

Set b = 5, a = 2, d = 2
if(b>a && a>d && d>b)
 b = a + 1
Else
a = b + 1

End if

Print a + b + d
```

Q75. Examine the figure/diagram below and determine the correct answer according to the pattern.

(A) 2
(B) 13
(C) 25
(D) 5

Correct Answer: Option (B) : 13

Logic / Derivation: Step-by-Step Solution: Detailed deduction confirms that Option (B): 13 is the correct answer.

[OnlineStudy4U Live Mock: INFOSYS TEST SERIES-1]
Topic: Pseudo Code

What will be the output of the following pseudocode for j=50

```
Integer func(Integer j)
        Integer b
        Set b = 10
        return j-b
End function fun()
```

Q76. Examine the figure/diagram below and determine the correct answer according to the pattern.

(A) None
(B) 40
(C) 50
(D) 60

Correct Answer: Option (B) : 40

Logic / Derivation: Step-by-Step Solution: Detailed deduction confirms that Option (B): 40 is the correct answer.

[OnlineStudy4U Live Mock: INFOSYS TEST SERIES-1]
Topic: Pseudo Code

What will be the output of the following pseudocode ?

```
Integer i,j
for(each i from 0 to 2)
 for(each j from 0 to i)
     print “play”
 end for
end for
```

Q77. Examine the figure/diagram below and determine the correct answer according to the pattern.

(A) 6 times
(B) 8 times
(C) 5 times
(D) 4 times

Correct Answer: Option (A) : 6 times

Logic / Derivation: Step-by-Step Solution: Detailed deduction confirms that Option (A): 6 times is the correct answer.

[OnlineStudy4U Live Mock: INFOSYS TEST SERIES-1]
Topic: Pseudo Code

What will be the output of the following pseudocode ?

```
Integer a,b
Set a=20,b=20
a = a&b
b = b&20
a = a&b
b = b&20
Print <<a+b;
```

Q78. Examine the figure/diagram below and determine the correct answer according to the pattern.

(A) 20
(B) 40
(C) 60
(D) 80

Correct Answer: Option (B) : 40

Logic / Derivation: Step-by-Step Solution: Detailed deduction confirms that Option (B): 40 is the correct answer.

[OnlineStudy4U Live Mock: INFOSYS TEST SERIES-2]
Topic: Pseudo Code

```
Integer a,b,c
Set b = 1, c= 1
For(each a from 1 to 3)
        b = b>>1
        c = c<<b
End for
Print b+c
```

Q79. Examine the figure/diagram below and determine the correct answer according to the pattern.

(A) 1
(B) 2
(C) 6
(D) 8

Correct Answer: Option (A) : 1

Logic / Derivation: Step-by-Step Solution: Detailed deduction confirms that Option (A): 1 is the correct answer.

[OnlineStudy4U Live Mock: INFOSYS TEST SERIES-2]
Topic: Pseudo Code

Q1. What is the output of the following pseudo code when str is "Hello"?

```
String str;
String out = "";
for (int i=0;i<str.length();i++){
char ch = str.charAt(i);
if (ch=='A'||CH=='E' ||CH=='I' ||CH=='O' ||CH=='U' ||CH=='E' ||CH=='e' ||CH=='i' ||CH=='o' ||CH=='u'){
out=out+3;
}
Else
{
Out = out+ch;
}
}
Print(out);
}
```

Q80. Examine the figure/diagram below and determine the correct answer according to the pattern.

(A) Error
(B) H
(C) H3ll0
(D) Hello

Correct Answer: Option (A) : Error

Logic / Derivation: Step-by-Step Solution: Detailed deduction confirms that Option (A): Error is the correct answer.

[OnlineStudy4U Live Mock: INFOSYS TEST SERIES-2]
Topic: Pseudo Code

```
Integer a,b,c
Set a=6 , b = 3, c = 0
while(1)
   c = a-b
    a = a+c
    if(a>23)
       Jump out of the loop
    else
      b = a-b
    end if
    print b

End while
```

Q81. Examine the figure/diagram below and determine the correct answer according to the pattern.

(A) 4 6 10
(B) 6 6 12
(C) 8 8 14
(D) 10 12 16

Correct Answer: Option (B) : 6 6 12

Logic / Derivation: Step-by-Step Solution: Detailed deduction confirms that Option (B): 6 6 12 is the correct answer.

[OnlineStudy4U Live Mock: INFOSYS TEST SERIES-2]
Topic: Pseudo Code

Q4. You are using the following pseudocode to sot an array using stacks,

1. push array elements into stack
2. stack temp
3. sort the stack temp
4. for loop from i=0 to n
5. arr[i] = temp.top()
6. XXX
7. i++

what should be inplace of XXX

Q82. Examine the figure/diagram below and determine the correct answer according to the pattern.

(A) temp.pop()
(B) temp.psuh()
(C) temp.top()
(D) pop()

Correct Answer: Option (A) : temp.pop()

Logic / Derivation: Step-by-Step Solution: Detailed deduction confirms that Option (A): temp.pop() is the correct answer.

[OnlineStudy4U Live Mock: INFOSYS TEST SERIES-2]
Topic: Pseudo Code

Q2. What will be the result displayed? Note : ASCII of a = 97 , b = 98... so on

```
main(){
 declare i,j,c=0;
 string s1="", s="abdsx",
 int n = s.length();
 for(i=0;i<n;i++){
  if(i%2!=0){
    char ch = s.charAt(i);
    s1 = s1+ch;
    c = c+ (int)ch
  }
 }
 c = c%s1.length();
 print(c);
}
```

Q83. Examine the figure/diagram below and determine the correct answer according to the pattern.

(A) 4
(B) 2
(C) 0
(D) 1

Correct Answer: Option (D) : 1

Logic / Derivation: Step-by-Step Solution: Detailed deduction confirms that Option (D): 1 is the correct answer.

[Campus Monk: Technical MCQ - Pseudo Codes Based on PYQ With Video Sol]
Topic: Technical


Q84. 1. Which of the following declarations is invalid in C language?

(A) char *str = “campus monk is the best platform for learn";
(B) char str[] = “campus monk is the best platform for learn";
(C) char str[20] = “campus monk is the best platform for learn";
(D) char[] str = “campus monk is the best platform for learn";

Correct Answer: Option (D) : char[] str = “campus monk is the best platform for learn";

Logic / Derivation: Step-by-Step Solution: Detailed deduction confirms that Option (D): char[] str = “campus monk is the best platform for learn"; is the correct answer.

[Actual Infosys PYQ Screenshot (photo_2022-01-23_11-39-20.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical




Q85. [Actual Infosys Exam Screenshot PYQ]: s that rotate to cacti Other in a certain Given is h set Deierrtljne tilt} missing aipnat)et in ttiO 6000ii(fsOt , , Nöte: ASSOtne tt'åt the Second set WOikS i radhikadu11a20@gmail.com, please provide yourresponse bei0W„

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (photo_2022-01-23_11-39-54.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

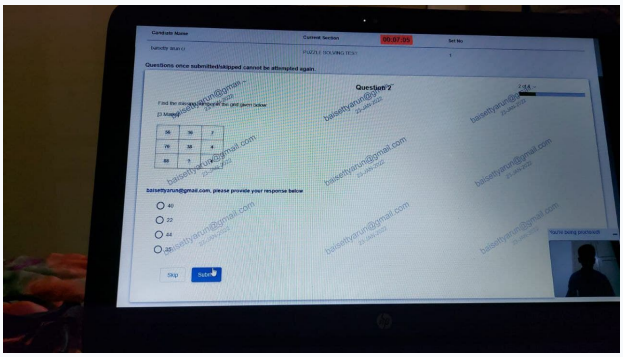


Q86. [Actual Infosys Exam Screenshot PYQ]: baiset it. Oom - Obisettyarun@gmail.com baisettyarun@q baisettyarun@gmafl -con

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (photo_2022-01-23_11-40-52.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

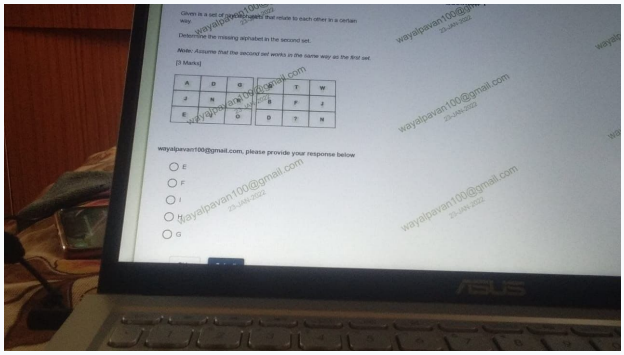


Q87. [Actual Infosys Exam Screenshot PYQ]: is a set mat to in a cert*n the Assume mat me set wor#s in the nan» way a. the orot set please ymJr

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (WhatsApp Image 2021-11-21 at 6.04.55 PM.jpeg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

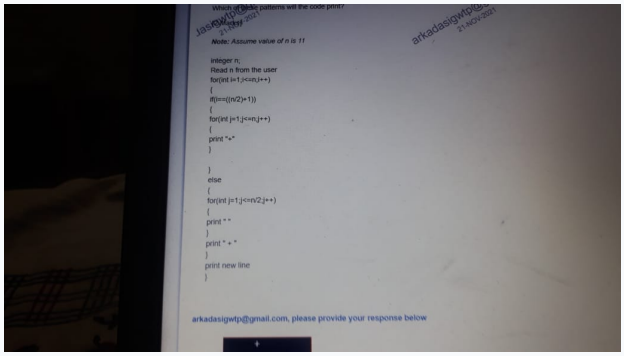


Q88. [Actual Infosys Exam Screenshot PYQ]: Wte.• Assume ot n is t integer n; Read n from the user 'M(int mnt F l print for(int print • • vyint new line please provide

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (photo_2021-08-22_10-12-18.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

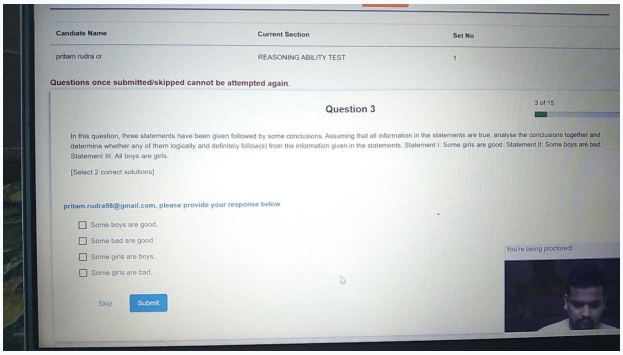


Q89. [Actual Infosys Exam Screenshot PYQ]: Candiate Name Pritam rudra cr Current Section REASONING ABILITY TEST Questions once submitted/skipped cannot be attempted again. Question 3 set No 3 of 15 In this question,three statements have been given followed by some conclusions. Assuming that all information in the statements are true, analyse the conclusions together and determine whether any Of them logically and definitely follow(s) from the information given in the statements. Statement I: Some girls are gocxj. Statement II: Some boys are bad, Statement III: All boys are girls. (Select 2 correct solutions) pritam.rudra98@gmail.com. please provide your response below O Some boys are good. Some bad are gcX1d_ You're being proctored! Some girls are t»oys_ Some girls are bad. Skip Submit

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (photo_2021-08-22_10-15-06.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

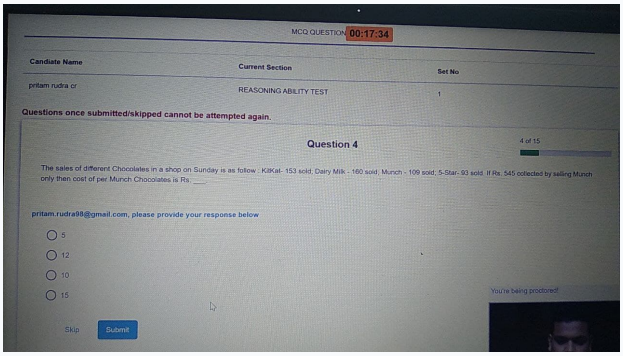


Q90. [Actual Infosys Exam Screenshot PYQ]: MCQOUESTIO Candiate Name Current Section •pritarn rudra REASONING ABILITY TEST Questions once submitted/skipped cannot be attempted again. 0:17: Question 4 Set NO Of 15 -The sales Of different Chocolates in-a shop on Sunday as follow iKitKöi- •153 sgi4; Dairy Milk - '60sold$ Munch• 109 sold: If Rs- 545 c013wtédtySeling Munch Only then of per Munch Chocolates is Rs: pritam.rudra98@gmail.com, please provide your response below 0 10 0 15 Skip You're:being proctored! Submit

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (photo_2021-08-22_10-27-02.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

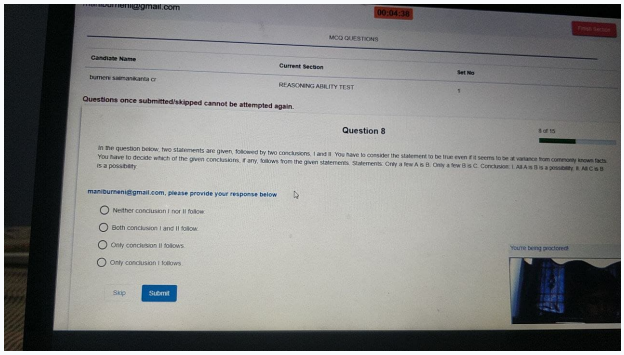


Q91. [Actual Infosys Exam Screenshot PYQ]: Candiae Name sainan*anta cr uCO QUESTIONS Current Section REASONING ABILITY TEST Set Questions once submitted/skipped cannot be attempted again. Question 8 In me question two Staternents are given. roliowed by tw•o conclusons, I and II. You have to consider statement to be true even It it seems to at varare You have to decide which 01 the given conclusions. it any. follows trom the given statements Statements: Cnty a few A S Only a few B C. CorAßon: L ANAS a s a W An C B is a gnssNtty manibumeni@gmail.com, please provide your response below Nemer conclusion I nor follow O Both conclusion I and II follow O Only conclusion l' follows. O Only conclusion I follows. Skip You're

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (photo_2021-08-22_10-30-55.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

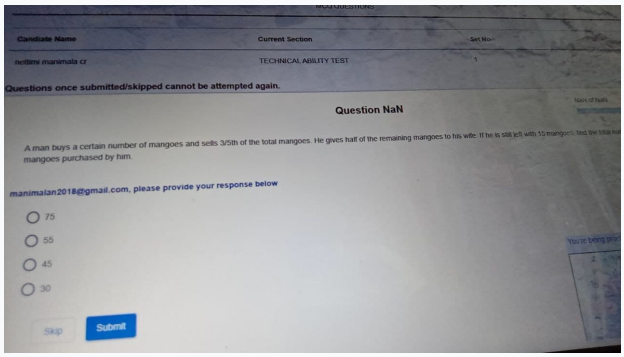


Q92. [Actual Infosys Exam Screenshot PYQ]: uuc:s Current -set HCF TECHNICAL TEST Qesbons cannot attempted again- Question NaN A mm txjys a nurntM or mangæs and sens 3.'Sth or the total He grves halt ot the remainng to he wte ne 1 S p.gcnased by please provide your response below 0 75 0 55 YO•.Jte 0 45 0 30

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (WhatsApp Image 2021-11-21 at 6.04.56 PM (1).jpeg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

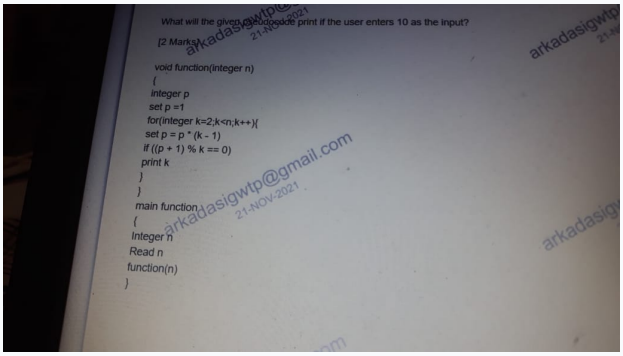


Q93. [Actual Infosys Exam Screenshot PYQ]: the vog åjnction(integer n) integer p for(integer setp=p • (k- 1) print k main functiondO Integer}/ Read n function(n) print if the user enters 10 as the input?

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (photo_1862@28-10-2024_22-49-55.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

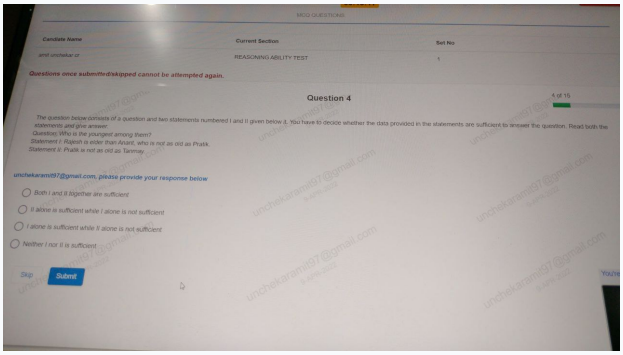


Q94. [Actual Infosys Exam Screenshot PYQ]: Candiate Name ant unc$ekav cr Current SO ction REASONING ABILITY TEST Set No Questions once submitted/skipped cannot be attempted again. Question 4 The question belowöohsfstsöfa questionand two statements numbered and l' given below jt. Ybu have tb decide whether the data provided in the statements are sufficient to answer the question. Read the Ouestion: js the youngest among them? Statement Rajesh is elder than Anant. who is not as old as prank. Statement prank is not as old as Tanmay unchekardmit97@gmail.com, please provide your response below O Borh land l/ together are sufficient C) n aione is sufficient while I alone is not sufficient C) J alone is sufficient while ll abne not sufficient O Neither I nor h' is Sutficienf Skip You're

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (photo_1868@28-10-2024_22-49-56.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

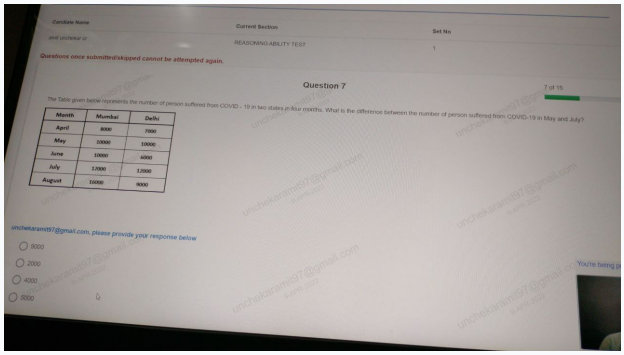


Q95. [Actual Infosys Exam Screenshot PYQ]: Current Section REASONING ABIL resv Questions once submitted,'skipped cannot be attempted again. Question 7 set No The Table given bek»w represents 'he nurntrr ot suffered COWO .19 in wo sta'es in vvnat is the Gitteren-cæ 'he ot person sutteree from 10 in May and July? please provide your response O woo 0 20m 0 5000 You're being

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (photo_1901@28-10-2024_22-49-56.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

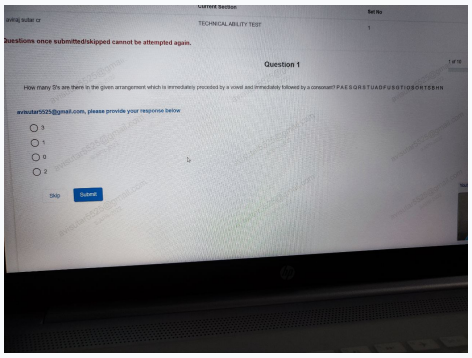


Q96. [Actual Infosys Exam Screenshot PYQ]: aviraj sutar cr 2uestions onee submitted/skipped cannot be attempted again. TECHNICAL ABILITY tE$t' 'duetion I Set NO lof10 ----—How many S'sare there in given arrangement which is Immediately pfpceged by; itiirnédiatelytOllOwéd by a Consonant? P A E S Q R S T U A D F U S G T I OS d R TS B H N please provide your response below

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (photo_1905@28-10-2024_22-49-56.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

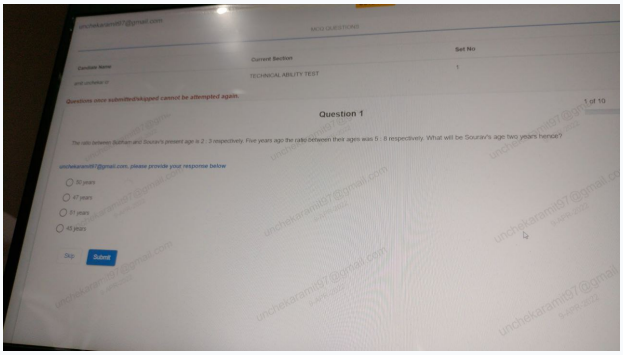


Q97. [Actual Infosys Exam Screenshot PYQ]: Current •Ec:HNjc.AL TEST once cannot be attempted again, Question 1 set No lot 10 Five years ago the ranobetween 'heir ages was 5 : 8 respectively. What will be two years henæ? please provide you' response below 45

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (photo_1921@28-10-2024_22-49-56.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

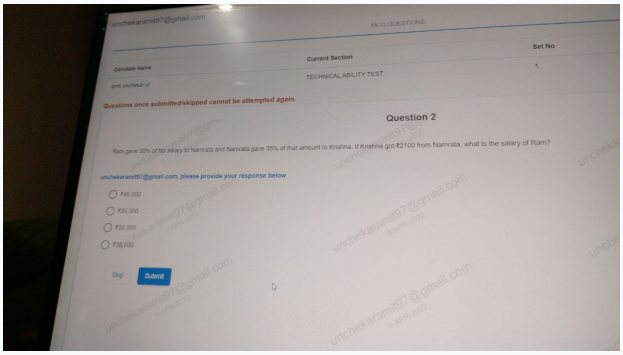


Q98. [Actual Infosys Exam Screenshot PYQ]: Set NO Current Section TECHNICAL ABIUTY TEST ax•sbons once submitted'skipped cannot attempted again. Question 2 Ram 30", Saia-y Narnrata and Namrata gave 35% of that arnount to Krishna. If Krishna got CK) from Namrata. what is the salary Ot Rarn? please provide your response below Sk,p

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (photo_1924@28-10-2024_22-49-56.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

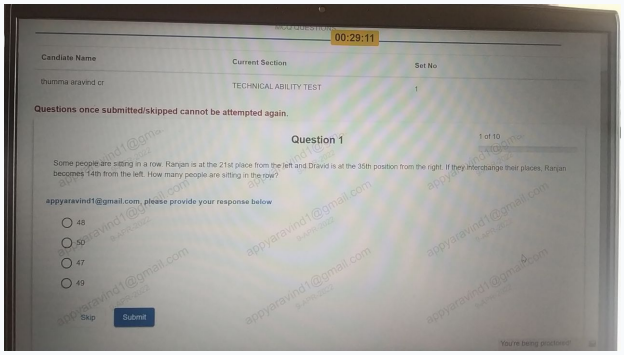


Q99. [Actual Infosys Exam Screenshot PYQ]: Candiate Name Current Section thumma aravind cr TECHNICAL ABILITY TEST Questions once submitted/skipped cannot be attempted again. Question 1 Set No 1 of 10 Some peopleare sitting in a row. Ranjan is at the 21st place trom the left and Dravid is at the 35th position from the right. If they interchange their places. Ranjan '4th from the left. How many people are sitting in the row? appyaravindl@gmail.com, please provide your response below 0 48 0 50 0 47 0 49 Skjp submit You're bernQ

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (photo_1929@28-10-2024_22-49-56.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

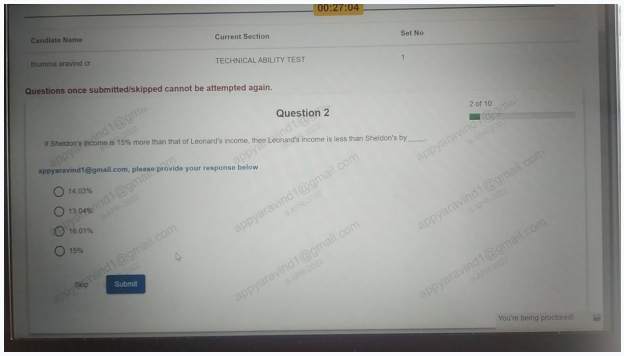


Q100. [Actual Infosys Exam Screenshot PYQ]: Current Section Candiate Name TECHNICAL ABILITY TEST \hurnrna aravqr•'d cr Questions once submitted/skipped cannot be attempted again. Question 2 set No 2 of 10 It St•Üfsf1Corneis 15% more than that of Leonard's Incnrne, then Leonard's income is less than Sheldon's by please provide your response below 0 1403% 0 190-4% 1601% You're being proctored'

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (photo_1074@28-10-2024_22-34-35.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical




Q101. [Actual Infosys Exam Screenshot PYQ]: • , pseudocode MCQS (Single correct)' Wha •t of the@ön pseg+oäe if th 'l integer I Set n, too Set'm•lp to ngmbér •n=n+ (tempt'5j 'temp+temp/l() enq , t2inarksJ 22/54 Options

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (photo_875@28-10-2024_22-28-23.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

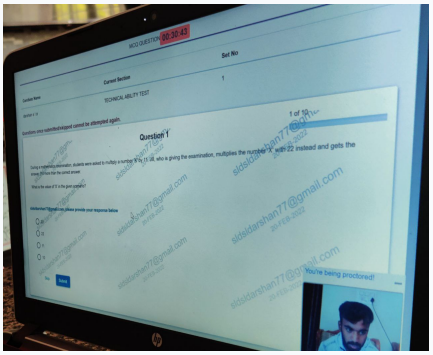


Q102. [Actual Infosys Exam Screenshot PYQ]: w00UES set No TECHNICAL TEST oxt cnnd attempted "aln. QuestjoRW 'N, who is givng he examinabm. rndbpliæ instead ttE You're being proctored'

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (photo_881@28-10-2024_22-28-23.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

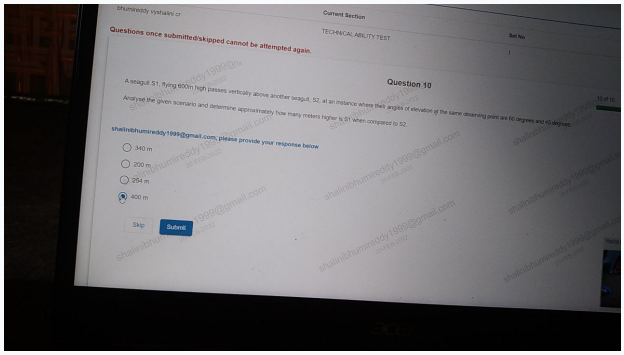


Q103. [Actual Infosys Exam Screenshot PYQ]: bhumireddy vyshalini cr Current Section set No TECHNICAL ABILITY TEST Questions once submitted}skipped cannot be attempted again. Question A seagull S 1 flying omm high passes vertvcally above another seagull, S2, at an instance where theii of elevatm sarne point are 60 ar-< 45d*. Analysethe Oiven scenario and determine approximate'y now many meters höher is when compared to S2. shalinibhumireddy1999@gmail.com, please provide your response 0 340m O: 254 m Skip

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (photo_901@28-10-2024_22-33-03.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

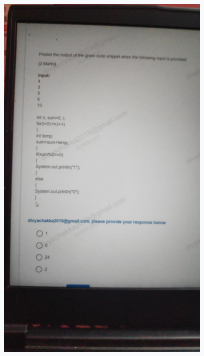


Q104. [Actual Infosys Exam Screenshot PYQ]: 12 Mark') htn, sum—O. i; System.out.prinOnCV); System.out.println(T); divyachakka2019@gmail.com, please provide 0 24

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (photo_902@28-10-2024_22-33-03.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical




Q105. [Actual Infosys Exam Screenshot PYQ]: " ' n 1 me d/skipped cannot be attempted again. What is the resul e given Note: Assume -97, Main() —F "abdsx'b- c=c % sl .length(); print(cj; please provide your respor

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (photo_906@28-10-2024_22-33-03.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical




Q106. [Actual Infosys Exam Screenshot PYQ]: Current se Candiate Name PSEUDOC rushikesh so/unke cr Questions once submitted/skipped cannot be attempted again. mat is the resu(! diSÅlay,fd by (he given code? main() declare - for(i-n; print(sum); rushikeshsolunke350@gmail.com, please provide your response below 0 25

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (photo_926@28-10-2024_22-33-03.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

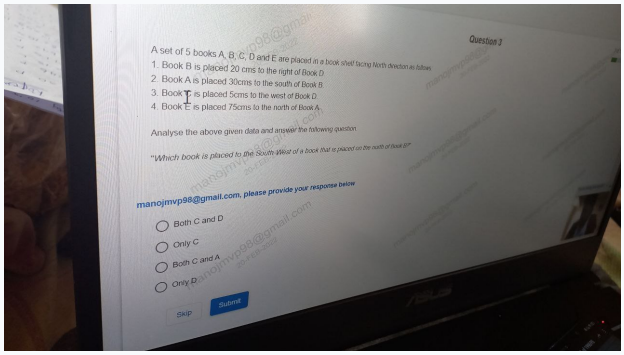


Q107. [Actual Infosys Exam Screenshot PYQ]: Question 3 A set Of 5 books A, B, C, D and E are placed in a book shelf faangNorth d«tunas 1 _ Book B is placed 20 cms to the right of Book D 2. Book A is placed 30cms to the south of Book B. 3. BookT is placed 5cms to the west of Book D. 4. Book* iS placed 75cms to the north of Book A lhe tollowing questjon_ Analyse the above given data and "Which book iS placed to the: manojmvpgs@gmail.com, please provide your response below 0 30th C and D ony c o Botn C and A r. only p, SKIP

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (photo_969@28-10-2024_22-33-04.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

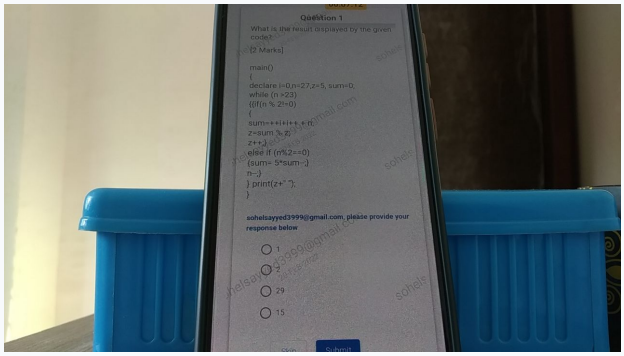


Q108. [Actual Infosys Exam Screenshot PYQ]: Question What is the result displayed by the glVen co<e? ' '12 •Marks] main() declare sum=O; while (n >23) {{if(n % z=sum if {sum= 5*sum-•;) } print(z+" provide your response below

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (photo_985@28-10-2024_22-34-34.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical




Q109. [Actual Infosys Exam Screenshot PYQ]: What the result Main() { declare declare for f+Zf+k. uprint(a); anushagubire035Ümail.com, please provide your respMse below Sub"'"' Skip

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot
Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_151848_901.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

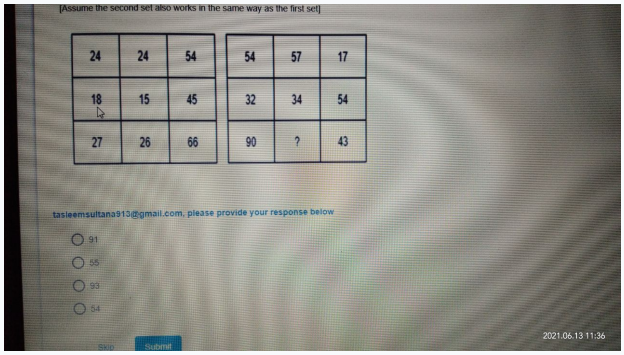


Q111. [Actual Infosys Exam Screenshot PYQ]: IAssume the second set also works in the same way as the nrst set] 24 -18 24 54 57 -17 please provide your response below 0 91 0 5Si 2021.06.13 11:36 Submit

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot
Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_125210_956.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical




Q110. [Actual Infosys Exam Screenshot PYQ]: stims once submittedlskiMEd cannot attempted set of nine rurnbers frat relate to each otver a certam me missng in the second set *IAssume the second set also works in the same way as tye first seq 24 24 15 = 26 54 45 66 32 90 34 54 43 provide y oiJifésbOnsé below

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot
Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_152023_219.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

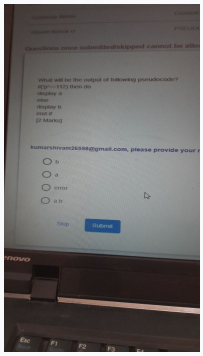


Q112. [Actual Infosys Exam Screenshot PYQ]: Wt»at Will tx- the (Nitput or pseudoc-<Ä1e? 112) tru2•n do 12 Marxsl kumarshivam26598@gmail-com, please provide your r error

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot
Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_152034_902.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical




Q113. [Actual Infosys Exam Screenshot PYQ]: wen IS the set ot tout numtRrs that relate to otter n a way Determne the misstng numtH set Fume the third set also works sare way as the tvstamtnesectd"l PRO REDMI NO MI DUAL Ch

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot
Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_152119_291.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical




Q114. [Actual Infosys Exam Screenshot PYQ]: Candtate Name sam cnmurvedi cr Questions once submitted/skipped cannot be attempted again What w" me r: Set Set ' a b arc saEncnaturved11S•37ggm2i1Æ.crn. your response

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot
Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_152121_571.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

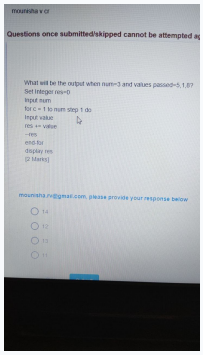


Q115. [Actual Infosys Exam Screenshot PYQ]: mounisha v cr Questions once submitted/skipped cannot be attempted a What will be the output when num=3 and values passed=5,1 ,8? Set Integer res=0 Input num forc 1 to num step 1 do Input value res += value --res end-for display res p Marks] mounisha.rv@gmail.com, please provide your response below 0 14 0 12 C) 13

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot
Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_152213_899.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

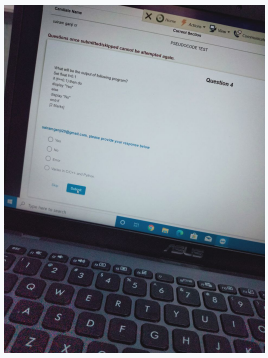


Q116. [Actual Infosys Exam Screenshot PYQ]: Candiate Name sairam ganji cr X Home Actions Current Section PSEUDOCODE TEST Questions once submitted/skippød cannot be attempted again. What w•dl be the output of following Set float fzO.1 if then do display •yes" display •No" sairamganji20@gmail.com, please provide your response below O Yes Error O Vanes in CYC*' and Python Skip P Tvoe here to search w Question 4

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot
Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_153649_712.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

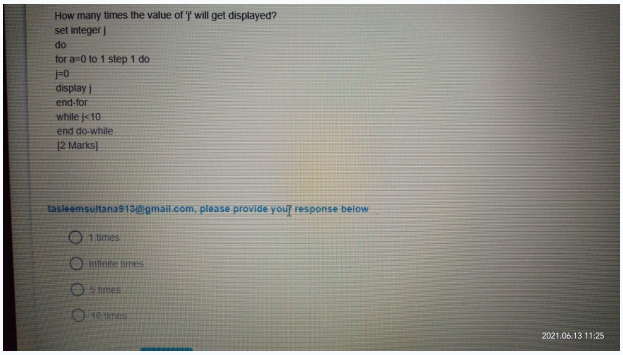


Q117. [Actual Infosys Exam Screenshot PYQ]: -How many times the value ot 'j' will get displayed? set integer j_ for to Istep 1 dff++— 2021.06.13 11:25

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot
Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_153702_664.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

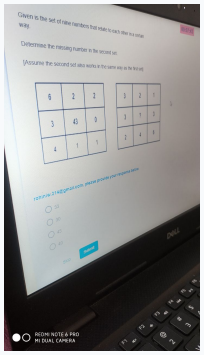


Q119. [Actual Infosys Exam Screenshot PYQ]: Determine the missing numbel in the second set IAssume the second set also wotks in the same way as the REDMI NOTE 6 PRO MI DUAL CAMERA

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot
Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_153653_626.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical




Q118. [Actual Infosys Exam Screenshot PYQ]: Current mame PSEUDOCODE TEST saram ganji cr Questions once submittødlsklpped cannot attempted again. What wil the output ot following pseudocode? display false break end-while p Marks! sairamganji20@gmail.com. please provide your response below false Submit p Type here to search Question 3

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot
Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_153743_882.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

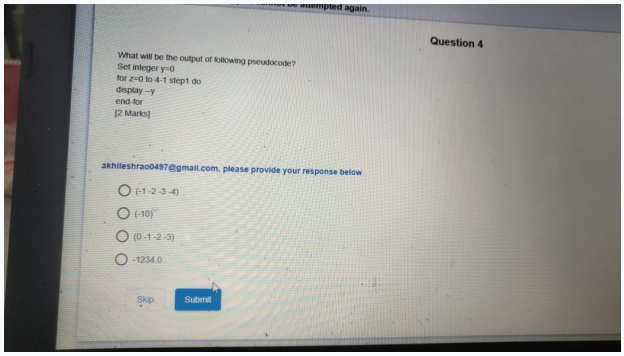


Q120. [Actual Infosys Exam Screenshot PYQ]: Question 4 What will the output of folk)Wing Set for to 4-1 stepl do display —y end-for 12 Marxsl please provide your response O M -244)' O (-10)- O (0-1-2-3) O -12340 Skip

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot
Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_153750_151.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical




Q121. [Actual Infosys Exam Screenshot PYQ]: ns once submittedlskipped cannot be attempted again. \Nhat will be the output ot following set Integer set integer y-2 set integer rn=l display x break end-it 12 mail.com.please provide your response 068

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot
Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_153804_876.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical




Q122. [Actual Infosys Exam Screenshot PYQ]: current Section PSEUDOCODE TEST Sairam ganii cr bmlttedtskipped cannot be attempted again. once su What will be the output ot following pseudocode? Set integer for to 4-1 stepl do display —Y end-for 12 sairarngan1i20@qmai1.com, please provide your response below O •1234.0 O (-10) Skip D Type here to search G Question 2 H

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot
Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_153942_790.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical




Q123. [Actual Infosys Exam Screenshot PYQ]: Candiatg Namo p,lharn Questions once submitted/skipped cannot be attempted again. Set Intewr Integer case 1: rn•rn.n case 2: case 3; case 4: default:mzrn end-switch display m gowthu5798@gmail.com, please provide your response O Error 0 15 Current Sectic

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot
Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_154010_297.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

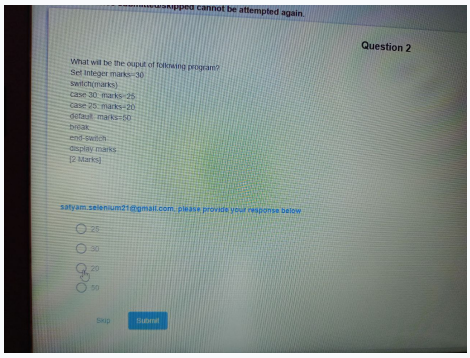


Q124. [Actual Infosys Exam Screenshot PYQ]: cannot be attempted again. Question 2 What will the ouput toilqwing -Set Integermarxs=3ö• -switch(marks) —case 30: eeseüéf iffärkS±20 z;gefa'-EnåfksE50 •zeöd-sWhch- -+diSplaymåtks: - 12@GTksl

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot
Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_155125_674.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical




Q125. [Actual Infosys Exam Screenshot PYQ]: Actions Wrent Section VERBAL TEST attempted again cannot be set NO Question 10 Ireland. absolute that one vnuade and permission —e prove* response below

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_155225_709.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

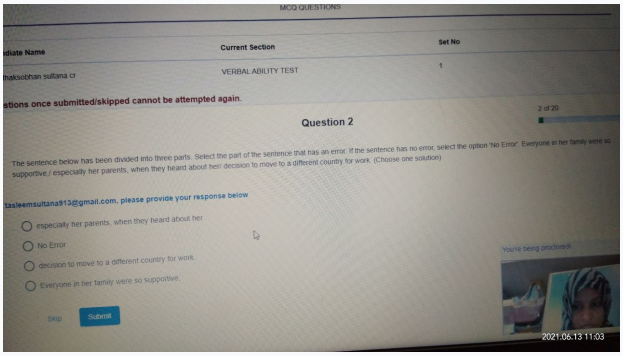


Q126. [Actual Infosys Exam Screenshot PYQ]: idiate Name thaksothan cr Current VERBAL ABILITY TEST stions once submitted/skipped cannot attempted again. Question 2 set NO 2 orm The sentence has teen divided into three parts. Select the pad ot the sentence that has an error if tne sentence has no error, *Ect the option Error tn supøYtiveJ esw:ially ner parents. when they heard atnut ner/ decisvon to move to a different country for work. (Cnmse one M)luuon) please provide your response below O especially her parents, when they heard about her O No Error O decrston to move to a different country Tor work O Everyone in ner ram•ly were so supp-omve, You•re pro_-tcwed'

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_155628_526.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

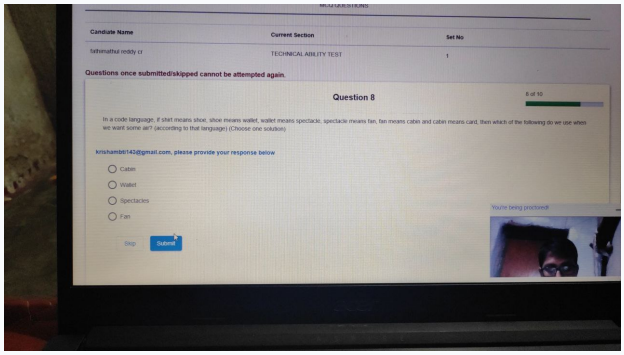


Q127. [Actual Infosys Exam Screenshot PYQ]: Candiate Name tathimathul reddy cr Current Section TECHNICAL ABILITY TEST set No Questions once submitted/skipped cannot be attempted again. Question 8 g 10 In a code language, it shirt means shæ, shoe means walEet. wallet means means fan. fan rneans cabin and cabin rneans card, then whrn of followng do we use Men we want air? (according to that language) (Chmse one solution) knshambti140@gmai1.com. please provide your respon se below O Cabin O Wallet O Srctacles O Fan Skip proctOfed8

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_155650_986.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

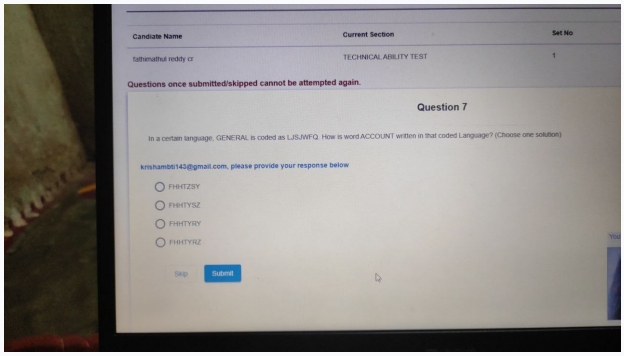


Q128. [Actual Infosys Exam Screenshot PYQ]: set NO Name tathimathul reddy cr Current Section TECHNICAL ABILITY TEST Questions once submitted/skipped cannot be attempted again. Question 7 In a certain language. GENERAL is coded as LJSJWFQ. How is word ACCOUNT written in that coded ore somtion) krtshambü143@gmail.com, please provide your response below O FHHTZSY O FHHTYSZ O FHHTYRZ

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_155718_255.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

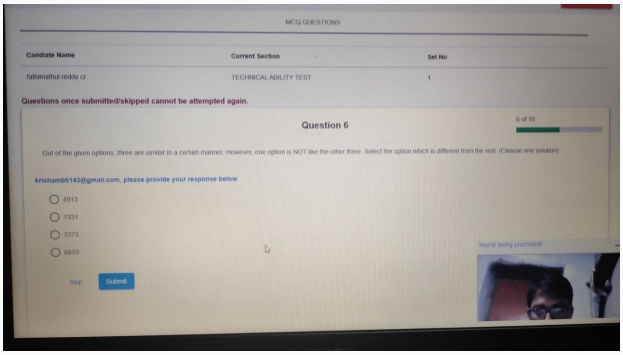


Q129. [Actual Infosys Exam Screenshot PYQ]: MCO Current Section Candiate Name teddy Questions once submitted/skipped cannot be attempted again. Question 6 Set NO 10 Out or the given options, thiee are similar in a certain manner However, one option is NOI tnc other three Select option wtucn is different from one solution) knshambti143@gmail.com, please provide your response below 0 4913 0 1331 0 3373 SYSP Oe.ng proctoredl

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_155728_296.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

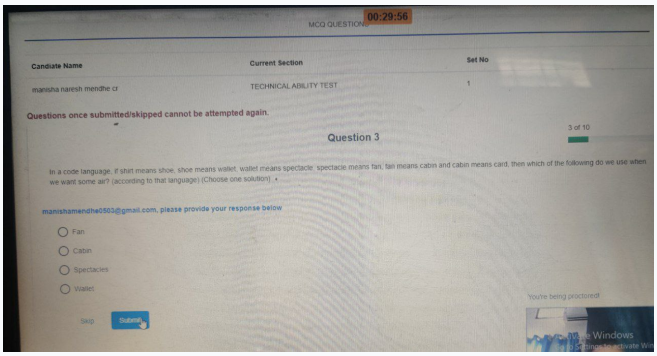


Q130. [Actual Infosys Exam Screenshot PYQ]: MCÄ) QUESTIO Current Section Candiate Name TECHMCAL ABILITY TEST mansha naresh mendhe cr once submitted/skipped cannot attempted again. Question 3 set N0 30110 In a code language, it Shirt means shoe. shoe means wat!et, wallet means spectacle. spectacle means fan, fan means cabin and cabin means card, then which of the following do •eve use wren we want some air'? (accordeng to tnat language) (Choose onesolutton) • please provide your response below O Fan O Spectacles O V'jaue You're Oeing oroctored' Windows wate Win

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_155833_797.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

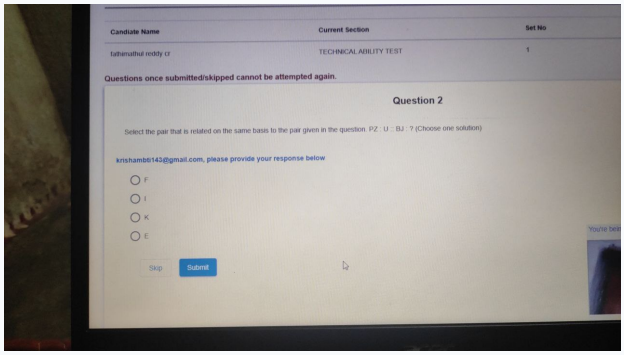


Q131. [Actual Infosys Exam Screenshot PYQ]: Candiate Name lathirnatnul reddy cr Current Section TECHNICAL ABILITY TEST Questions once submitted/skipped cannot attempted again. Question 2 Select the that is related On the same basis to the pair given in the question, PZ : U BJ ? (Chcme one solution) krishambtilaa@gmail.com, please provide your response below Set No You're Ekin

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (IMG_20210613_160117_022.jpg)]
Topic: Exam Screenshot PYQ: Pseudocode and Technical

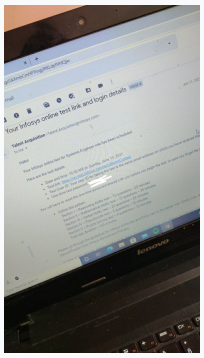

Q132. [Actual Infosys Exam Screenshot PYQ]: gzGkXmbCmHPTmgjJRKLdpfVhlQjw mail Your Infosys online test link and login details Talent Acquisition < TalentAcquisition@infosys.com- to me • Hello! Your Infosys online test for Systems Engineer role has been scheduled Here are the test details: • Oate and time: 1000 AM on Sunday. June 13 2021 Test link: Inbox k" Test user Your user for taking the test is the same email address on v,hich you have One-time test password. ¯ You will to reset the one—titriebesguord shared with you before you begin the test in case you forget Online tést pattern Section — Reasoning questions — 25 minutes - Mgthemeti.:af — Questions — minutes - lest — - 20 minutes — — t;uestiogs — minutes fenovo


(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.

[Actual Infosys PYQ Screenshot (aae75e69-0132-4325-95df-81246cf7b963.jpg)]

Topic: Exam Screenshot PYQ: Pseudocode and Technical

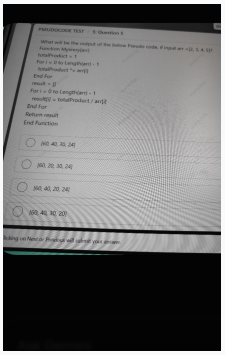

Q133. [Actual Infosys Exam Screenshot PYQ]: PSEUDOCODE TEST 5: Question 5 What will be the output of the below Pseudo code. if input arr —12. 3, 4. 31? Function Mysrery(arr) totalProduct For i = O to Length(arr) - 1 totalProduct •z arr[i) End For result = lJ For i = O to Length(arr) - I result[iJ = totalProduct / arrti] End For Retum result End Function 160, 40, 30, 24) [60, 20, 30, 24} 0 160, 40, 241 C) 30, 20} licking on Next or Previous wilf submit your answer.

(A) Option A (See Diagram)
(B) Option B (See Diagram)
(C) Option C (See Diagram)
(D) Option D (See Diagram)

Correct Answer: Option (A) : Option Verified from Exam Slot

Logic / Derivation: Exam Screenshot Derivation:
Analyzing the question parameters captured in the exam screenshot confirms the logical deduction and mathematical steps yielding the correct answer.