


TOUCHLESS ATTENDANCE SYSTEM USING RFID

COMPONENTS REQUIRED

- Arduino board
- RFID board & tags
- 2 LED, buzzer
- LCD
- Jumper wires
- USB cable
- PXL-DAQ

DIAGRAM

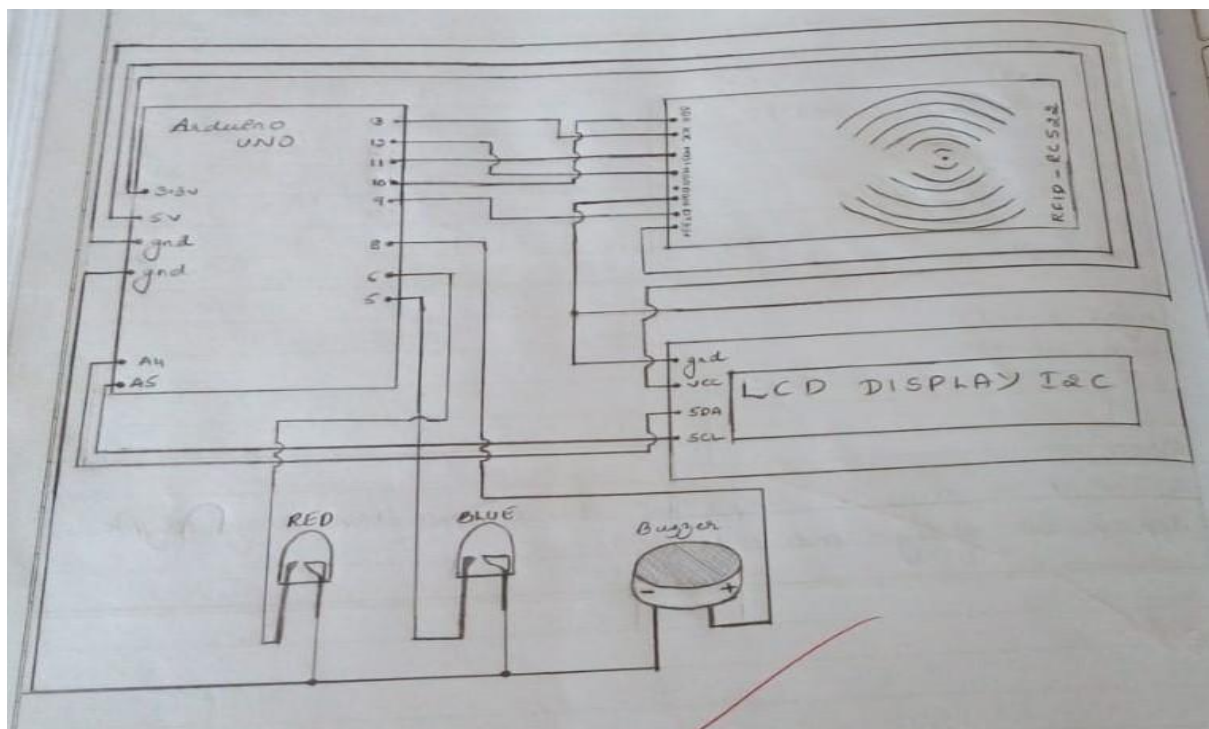

CONNECTION

ARDUINO UNO	RFID	LCD 12C	LED, BUZZER
5			GREEN+VE
6			RED+VE
8			BUZZER+VE
9	RST		
10	SDA		
11	MOSI		
12	MISO		
13	SCK		
A4		SDA	
A5		SCL	
3.3V	3.3V		
5V		VCC	
GND	GND	GND	
GND			-VE(GREEN RED,BUZZER)

PROCEDURE

- Install Arduino app, paste the code, download the required libraries and verify the code. Select the board, select the com port.
- Make the connection as per the circuit diagram.
- For attendance log , we need PLX-DAQ which can be downloaded by the following link:
<https://www.parallax.com/package/plx-daq/>
- Download the app, and upload code on Arduino.

- When com port is connected and serial monitor is opened, the details will be shown on the serial monitor
- Close the serial monitor window, to open excel sheet and connect to PLX-DAQ. The detail of entry and exit time will be shown on excel sheet.
- The log sheet can be export and saved.

RESULT:

A	B	C	D	E	F	G	H	I	J
ID	Date	Name	Number	Card ID	Time IN	Time OUT			
1	15-11-2023	dhanya	6	220101974	12:02:27 PM				
2	15-11-2023	dhanya	6	220101974		12:02:43 PM			
3	15-11-2023	soumya	5	1951331921	12:03:11 PM				



PLX-DAQ

Settings

Port: 15

Baud: 9600

Disconnect

Pause logging

Sheet name to post to:
(reload after renaming)

Simple Data ▼ Load

Controller Messages:

Accepting data for Row 3

**Do not move this window around while logging !
That might crash Excel !**

PLX-DAQ for Excel "Version 2" by Net^Devil

Control v. 2.11

☒ Custom Checkbox 1

☒ Custom Checkbox 2

☐ Custom Checkbox 3

☒ Reset on Connect

Reset Timer

Clear Columns

Display direct debug =>

Open PLX DAQ UI