

# ANEMOMETER- PROJECT REPORT

Shrey Agarwal  
Material Science and Engineering  
Roll no.22110244  
IIT Gandhinagar  
Gandhinagar,Gujarat  
[shrey.agarwal@iitgn.ac.in](mailto:shrey.agarwal@iitgn.ac.in)

Shreyans Jain  
Electrical Engineering  
Roll no.22110245  
IIT Gandhinagar  
Gandhinagar,Gujarat  
[shreyans.jain@iitgn.ac.in](mailto:shreyans.jain@iitgn.ac.in)

**Abstract**—This report contains the aim, working principle, procedure and results of the electric project-Anemometer. An Anemometer is a device used to detect the speed of the wind. This report shows the graphs and electric model of the Anemometer. The project will involve the use of microcontrollers and programming to collect and process data, as well as the construction of a user-friendly interface for displaying the measured values. The completed anemometer will be a useful tool for various applications, including weather forecasting, wind energy production, and aviation.

## I. AIM

The aim of our project is to detect the speed of wind with the help of a curve-fitting graph which is the basis of the relationship between wind speed and the voltage generated by rotating the blades of an anemometer. This allows to measure wind speed accurately and provide valuable information for various applications, such as weather forecasting..

## II. THEORY

The working principle of our anemometer is that we give the flow of wind of known values and rotate the blades of the anemometer which is attached to a DC motor. This DC motor acts as a Dynamo and generates a voltage which is fed into a Python code to predict a relationship between wind speed and voltage generated by it. The testing phase of our project includes that when we blow the wind of unknown values, a corresponding voltage is generated and then by putting the voltage value in the equation of the curve fitting graph, we can find the unknown values of wind.

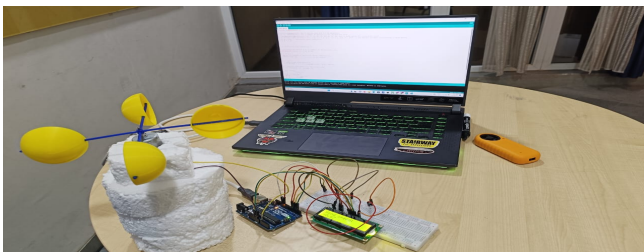


Fig1: Anemometer

## III. INSTRUMENTS REQUIRED\

The following are the instruments required for the making of an Anemometer:

- Arduino UNO
- Breadboard
- Calibrated Anemometer
- 16\*2 LED Display
- DC Motor
- 3D Printed Cups of Anemometer
- Jumper Wire
- Resistor
- Hair Dryer

## IV. PROCEDURE

Firstly, we start with the training phase of our project that is getting the data for calibration.. We hold the hair dryer at a distance from the Calibrated Anemometer and measure the speed of the wind. Then, we hold the hair dryer at the same distance from our anemometer and the blades of the anemometer start rotating. Due to the movement of the DC motor, it acts as a Dynamo and voltage is generated. We can obtain these values of voltage with the help of Arduino code. The code is:

```
File Edit Sketch Tools Help
FLSE2XUJACCU721
void setup() {
  // initialize serial communication at 9600 bits per second:
  Serial.begin(9600);
}

void loop() {
  // read the voltage on analog input pin A0:
  int sensorValue = analogRead(A0);
  // convert the analog reading (which goes from 0 - 1023) to a voltage (0 - 5V):
  float voltage = sensorValue * (5.0 / 1023.0);
  // print the voltage to the serial monitor:
  Serial.print("Voltage = ");
  Serial.print(voltage);
  Serial.println("V");
  // wait for 500 milliseconds before reading again:
  delay(500);
}
```

Fig 2: Code to get Voltage value.

Wind Speed (m/s)	Voltage Generated (in Volts)
5	0.84
3	0.45
2.4	0.34
2.5	0.44
4.2	0.68
9.6	1
10	1.09
10.5	1.087
11.1	1.26
11.5	1.3
11.6	1.4
11.8	1.6
6.8	0.85

Figure 3 is a scatter plot showing the relationship between Voltage (V) on the x-axis and Wind Speed (m/s) on the y-axis. The x-axis ranges from 0.0 to 1.6 with increments of 0.2. The y-axis ranges from 0 to 14 with increments of 2. Blue dots represent the data points, and an orange line represents the polynomial curve. The equation of the curve is  $y = -0.67x^0 + 8.86x^1$ .

Voltage (V)	Wind Speed (m/s)
0.0	0.0
0.35	2.5
0.45	2.5
0.45	3.0
0.7	4.2
0.75	5.5
0.85	5.0
0.85	6.8
1.0	9.5
1.1	10.0
1.1	10.5
1.2	9.8
1.3	11.0
1.35	11.5
1.4	11.5
1.6	11.8

```
# use the polynomial_func with the fitted parameters to predict the y value
x=int(input())
y_predicted = polynomial_func(x, "popt")

# print the predicted y value
print("The predicted y value for x = {} is {:.2f}".format(x, y_predicted))
```

✓ 3.3s

he predicted y value for x = 5 is 43.62

[illegible]


Thus, in this way, we can find the speed of the wind.

The curve fitting method helped to establish a relationship between wind speed and the voltage generated by the DC motor. We can use this relation to find wind speed in real-time world.

A drawback which may lead to inaccuracies is the use of manually calibrating the anemometer using a hairdryer. The stream of air using a hair dryer is not the same across the whole area and is prone to human error, e.g. when the hand moves.

Also we have used first order curve fitting as the data was proving to be nearly linear and the root mean squared error

(rmse) was nearly one.. Fitting higher order like a third degree polynomial brought down the rmse even further but was inaccurate to predict new values as it was overfit. Example we wanted to calculate the theoretical limit for the max wind speed it can possibly measure, that is when the input voltage becomes 5V. the input voltage, we get a negative wind speed which doesn't make any sense. The resulting graph can be seen below.

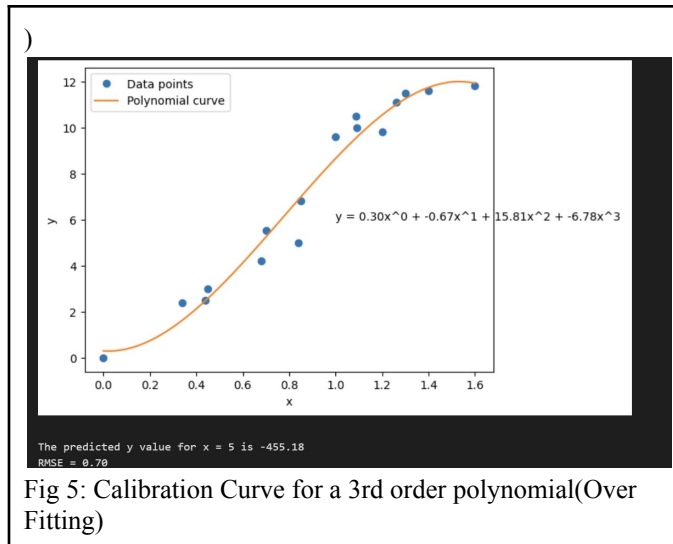

The product's limitation lies in its inability to accurately forecast wind speeds below 2m/s. This is because the weight of the plastic cup-like structures creates more resistance than a wind of 2m/s or less can overcome. As a result, values below this threshold cannot be measured.

## VII. REFERENCES

- [1] P.Singh, "Arduino Interfacing With LCD Without Potentiometer," Instructables, May 5, 2019. [Online]. Available: <https://www.instructables.com/Arduino-Interfacing-With-LCD-Without-Potentiometer/>