


Lab 7 Tasks

* Task 1:-

Process	AT	BT	CT	TAT	WT
P1	0	6	6	6	0
P2	2	8	14	12	4
P3	4	7	21	17	10
P4	6	3	24	18	15

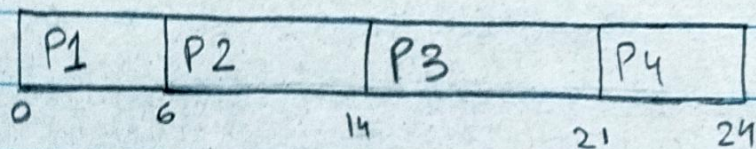


$$\bullet \text{ ATAT} = 13.25$$

$$\bullet \text{ AWT} = 7.25$$

* Task 2:-

Process	AT	BT	CT	TAT	WT
P1	1	5	6	5	0
P2	3	2	8	5	3
P3	5	9	21	16	7
P4	6	4	12	6	2

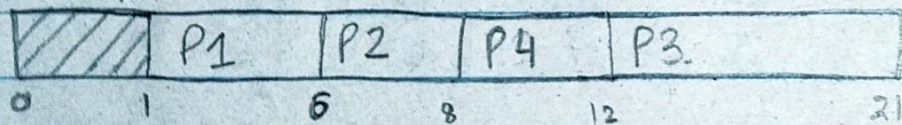


$$\bullet \text{ ATAT} = 8$$

$$\bullet \text{ AWT} = 3$$

* Task 3:-

Process	AT	BT	CT	TAT	WT
P1	0	9	22	22	13
P2	1	4	5	4	0
P3	2	7	14	12	5
P4	3	2	7	4	2

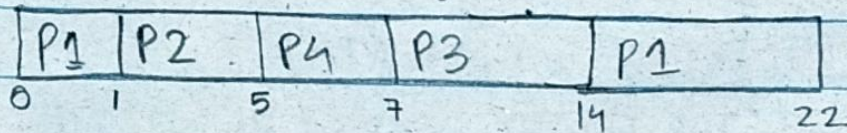


• $ATAT = 10.5$

• $AWT = 5$

* Task 4:- $q = 3ms$

Process	AT	BT	CT	TAT	WT
P1	0	10	26	26	16
P2	1	5	17	16	11
P3	2	8	25	23	15
P4	3	3	12	9	6

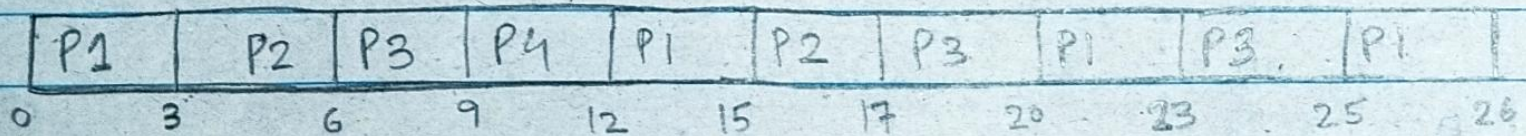

• $ATAT = 18.5$

• $AWT = 12$

* Task 5:- $q = 2ms$

Process	AT	BT	CT	TAT	WT
P1	0	12	30	30	18
P2	2	6	18	16	10
P3	4	8	28	24	16
P4	6	4	20	14	10

P1	P2	P1	P3	P2	P4	P1	P3	P2	P4	P1	P3	P1	P3	P1	
0	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30

P1	P2	P1	P3	P2	P4	P1	P3	P2	P4	P1	P3	P1	P3	P1
⇒ Ready Queue														

- ATAT = 21
- AWT = 13.5

* Task 6:-


Process	AT	BT	CT	TAT	WT	Priority
P1	0	7	7	7	0	3
P2	1	4	11	10	6	1
P3	2	6	17	15	9	2
P4	3	5	22	19	14	4

P1	P2	P3	P4	
0	7	11	17	22

- ATAT = 12.75
- AWT = 7.25

* Task 7:-

Process	AT	BT	CT	TAT	WT	Priority
P1	0	8	11	11	3	2
P2	1	3	4	3	0	1
P3	2	5	16	14	9	3

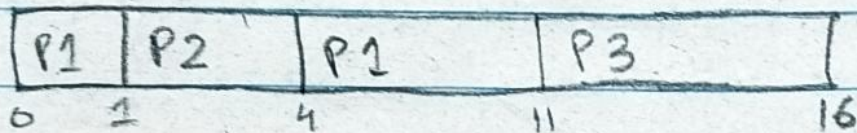

• $ATAT = 9.33$

• $AWT = 4$