Real-Time Schedulers for STM32: Performance Evaluation of EDF over SuperLoop

Vladimir Toporkov, Artem Burmyakov
Innopolis University

I. Introduction

STM32 is a family of microcontrollers developed by STMicroelectronics for embedded applications. These devices integrate a processor, memory, and peripheral interfaces on a single chip [1].

STM32-based devices support applications such as environmental monitoring [2] and equipment condition monitoring [3]. In these applications maintaining responsiveness as the workload increases is a key challenge.

The paper examines how the choice of scheduling approach affects responsiveness and processing cost on STM32. We compare two approaches: SuperLoop [4] and Earliest Deadline First (EDF) [5].

A. Contribution

We compare periodic SuperLoop and chunked EDF on an STM32F767. We evaluate the effects of workload utilization and chunk duration on response time, deadline misses, skipped releases, and measured selection overhead. Our implementations for both schedulers are publicly available.

II. Background on STM32

Fig. 1 illustrates the sensor platform considered in this work, based on an STM32F767 uniprocessor. Table I summarizes the functions and interfaces of its four sensors.

TABLE I
Sensor functions and interfaces.

Sensor	Purpose	Interface
DHT11 [6]	Temperature and humidity	Single-wire digital (GPIO)
HC-SR04 [7]	Distance	Trigger/echo (GPIO)
OV2640 [8]	Image acquisition	Parallel data, SCCB
SPW2430 [9]	Signal acquisition	Analog output (ADC)

General-purpose input/output (GPIO) pins carry digital signals, while an analog-to-digital converter (ADC) converts an analog signal into digital values. The Serial Camera Control Bus (SCCB) configures the camera.

A. Programming principles

1.AB: To describe the key aspects of STM32 programming. Limit the text to one page.

1) Programming environment: software name, protocols, etc.
2) Template structure of the project (macroses) in the development environment;
3) Functionality (macroses) to be implemented in that structure;
4) Put some print screens.

III. System Model

We use the periodic task model of Liu and Layland [5] and adapt the task and release notation of Burmyakov and Bini [10]. Table II summarizes the notation.

A real-time system $\mathcal{T} = \{\tau_1, \ldots, \tau_n\}$ consists of n periodic tasks executed on one core ($m = 1$). Each task $\tau_i = (C_i, D_i, P_i)$ is defined by the worst-case execution time C_i of a job, a relative deadline D_i, and a period P_i. We consider implicit deadlines, $D_i = P_i$. Task utilization is $U_i = {}^{C_i}/_{P_i}$, and task-set utilization is $U_{\mathcal{T}} = \sum_{\tau_i \in \mathcal{T}} U_i$.

Let $J_{i,j}$ denote the j-th job of τ_i, released at $r_{i,j}$. Consecutive jobs are released one period apart:

$$r_{i,j+1} = r_{i,j} + P_i. \tag{1}$$

Each job $J_{i,j}$ has an absolute deadline $d_{i,j} = r_{i,j} + D_i$. If completed, its finish time is denoted by $f_{i,j}$.

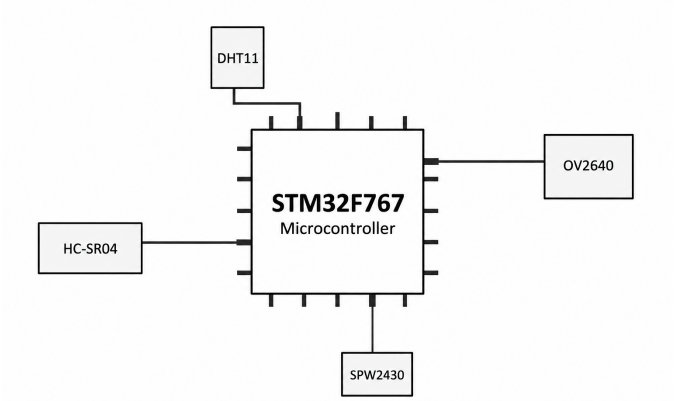


Fig. 1. Sensor platform based on STM32F767.

TABLE II
SYSTEM MODEL NOTATION.

Symbol	Meaning
$\mathcal{T}, n$	Task set and number of tasks
τ_i	Task i
C_i	Worst-case execution time of a job of τ_i
P_i	Task period
$D_i = P_i$	Relative deadline, equal to the period
$J_{i,j}$	The j-th job of task τ_i
$r_{i,j}$	Release time of job $J_{i,j}$
$f_{i,j}$	Job completion time
m	Number of cores
$d_{i,j} = r_{i,j} + D_i$	Absolute deadline of job $J_{i,j}$
$U_i = C_i/P_i$	Task utilization
$U_{\mathcal{T}} = \sum_{\tau_i \in \mathcal{T}} U_i$	Task-set utilization

- A schedule specifies which job executes at each time, if any.
- Preemption interrupts a job before completion to execute another job. The interrupted job may resume later.
- A completed job $J_{i,j}$ misses its deadline if $f_{i,j} > d_{i,j}$.
- The response time of a completed job $J_{i,j}$ is $f_{i,j} - r_{i,j}$.

IV. SCHEDULERS

We consider two schedulers: SuperLoop and EDF implementation in which jobs execute in chunks.

A. SuperLoop

SuperLoop repeatedly polls tasks in a fixed order. For each task, it checks whether the next release time has been reached. If so, the job runs to completion before the next task is polled. The key steps of the SuperLoop scheduler are outlined in Algorithm 1.

Algorithm 1 SuperLoop Scheduler

```
1:  function SUPERLOOP(T)
2:      t_i^next ← 0,   i = 1, ..., n                ▷ Initial releases
3:      while true do
4:          for i ← 1 to n do                        ▷ Fixed task order
5:              t^cur ← NOW()                        ▷ Read current system time
6:              if t_i^next ≤ t^cur then
7:                  J_{i,j} ← RELEASEJOB(τ_i, t_i^next)
8:                  EXECUTE(J_{i,j})                 ▷ Non-preemptive
9:                  f_{i,j} ← NOW()
10:                 t_i^next ← t_i^next + P_i
11:                 while t_i^next < f_{i,j} do t_i^next ← t_i^next + P_i
12:             end if
13:         end for
14:     end while
15: end function
```

Fig. 2(a) illustrates the SuperLoop schedule for tasks τ_1 and τ_2. Both tasks release their first jobs at $t = 0$. Since τ_1 comes first in the polling order, $J_{1,1}$ executes until $t = 18$ ms. Job $J_{2,1}$ then starts and completes at $f_{2,1} = 28$ ms, missing its deadline $d_{2,1} = 20$ ms.

The release at $r_{2,2} = 20$ ms occurs while $J_{2,1}$ is still running. Once this job completes, the scheduler counts that release as skipped and advances the next release time to $r_{2,3} = 40$ ms. Polling continues with no ready job until then.

B. Earliest Deadline First

In contrast, preemptive EDF selects the ready job with the earliest absolute deadline. A newly released job preempts the running job if its deadline is earlier.

Fig. 2(b) shows the EDF schedule for the same task set. At $t = 0$, $J_{2,1}$ has the earlier deadline and executes until $t = 10$ ms. Job $J_{1,1}$ then starts, but is preempted at $r_{2,2} = 20$ ms because the new job has a deadline $d_{2,2} = 40$ ms, earlier than $d_{1,1} = 50$ ms. Job $J_{2,2}$ executes until $t = 30$ ms, after which $J_{1,1}$ resumes and completes at $t = 38$ ms. The next job of τ_2 executes from $t = 40$ to $t = 50$ ms. Thus, no deadline is missed and no release is skipped in this example.

We use chunked EDF to evaluate scheduling on STM32 before developing a fully preemptive implementation. Jobs run in non-preemptive chunks of at most Δ ms.

Algorithm 2 outlines chunked EDF. COMPLETEJOB updates the next release time using the skip rule in Algorithm 1.

Fig. 2(c) shows the same task set with $\Delta = 4$ ms. At $r_{2,2} = 20$ ms, the first job of τ_1 is still executing a chunk, which ends at $t = 22$ ms. The new job of τ_2 therefore starts at $t = 22$ ms, with a preemption delay of $\delta = 2$ ms. It executes in chunks of 4, 4, and 2 ms and completes at $t = 32$ ms. The shorter final chunk reflects the remaining work. The interrupted job of τ_1 then resumes and completes at $t = 38$ ms.

Algorithm 2 Chunked EDF Scheduler

```
1:  function CHUNKEDEDF(T, Δ)
2:      R ← ∅                                        ▷ Set of unfinished jobs
3:      t_i^next ← 0,   i = 1, ..., n                ▷ Initial releases
4:      while true do
5:          t^cur ← NOW()                            ▷ Read current system time
6:          for all τ_i ∈ T do                       ▷ Check releases
7:              if t_i^next ≤ t^cur and no τ_i job in R then
8:                  J_{i,j} ← RELEASEJOB(τ_i, t_i^next)
9:                  R ← R ∪ {J_{i,j}}                ▷ Add new job
10:             end if
11:         end for
12:         if R ≠ ∅ then                            ▷ Pending work
13:             J_{i,j} ← SELECTEDF(R)               ▷ Earliest deadline
14:             EXECUTECHUNK(J_{i,j}, Δ)             ▷ Duration ≤ Δ
15:             if COMPLETED(J_{i,j}) then
16:                 f_{i,j} ← NOW()
17:                 while t_i^next < f_{i,j} do t_i^next ← t_i^next + P_i
18:                 R ← R \ {J_{i,j}}                ▷ Remove completed job
19:             end if
20:         end if
21:     end while
22: end function
```

$$\tau_i = (C_i, D_i, P_i), \qquad D_i = P_i, \qquad m = 1$$
$$\tau_1 = (18, 50, 50), \qquad \tau_2 = (10, 20, 20)$$

All times in ms. Maximum chunk duration in (c): $\Delta = 4$ ms.

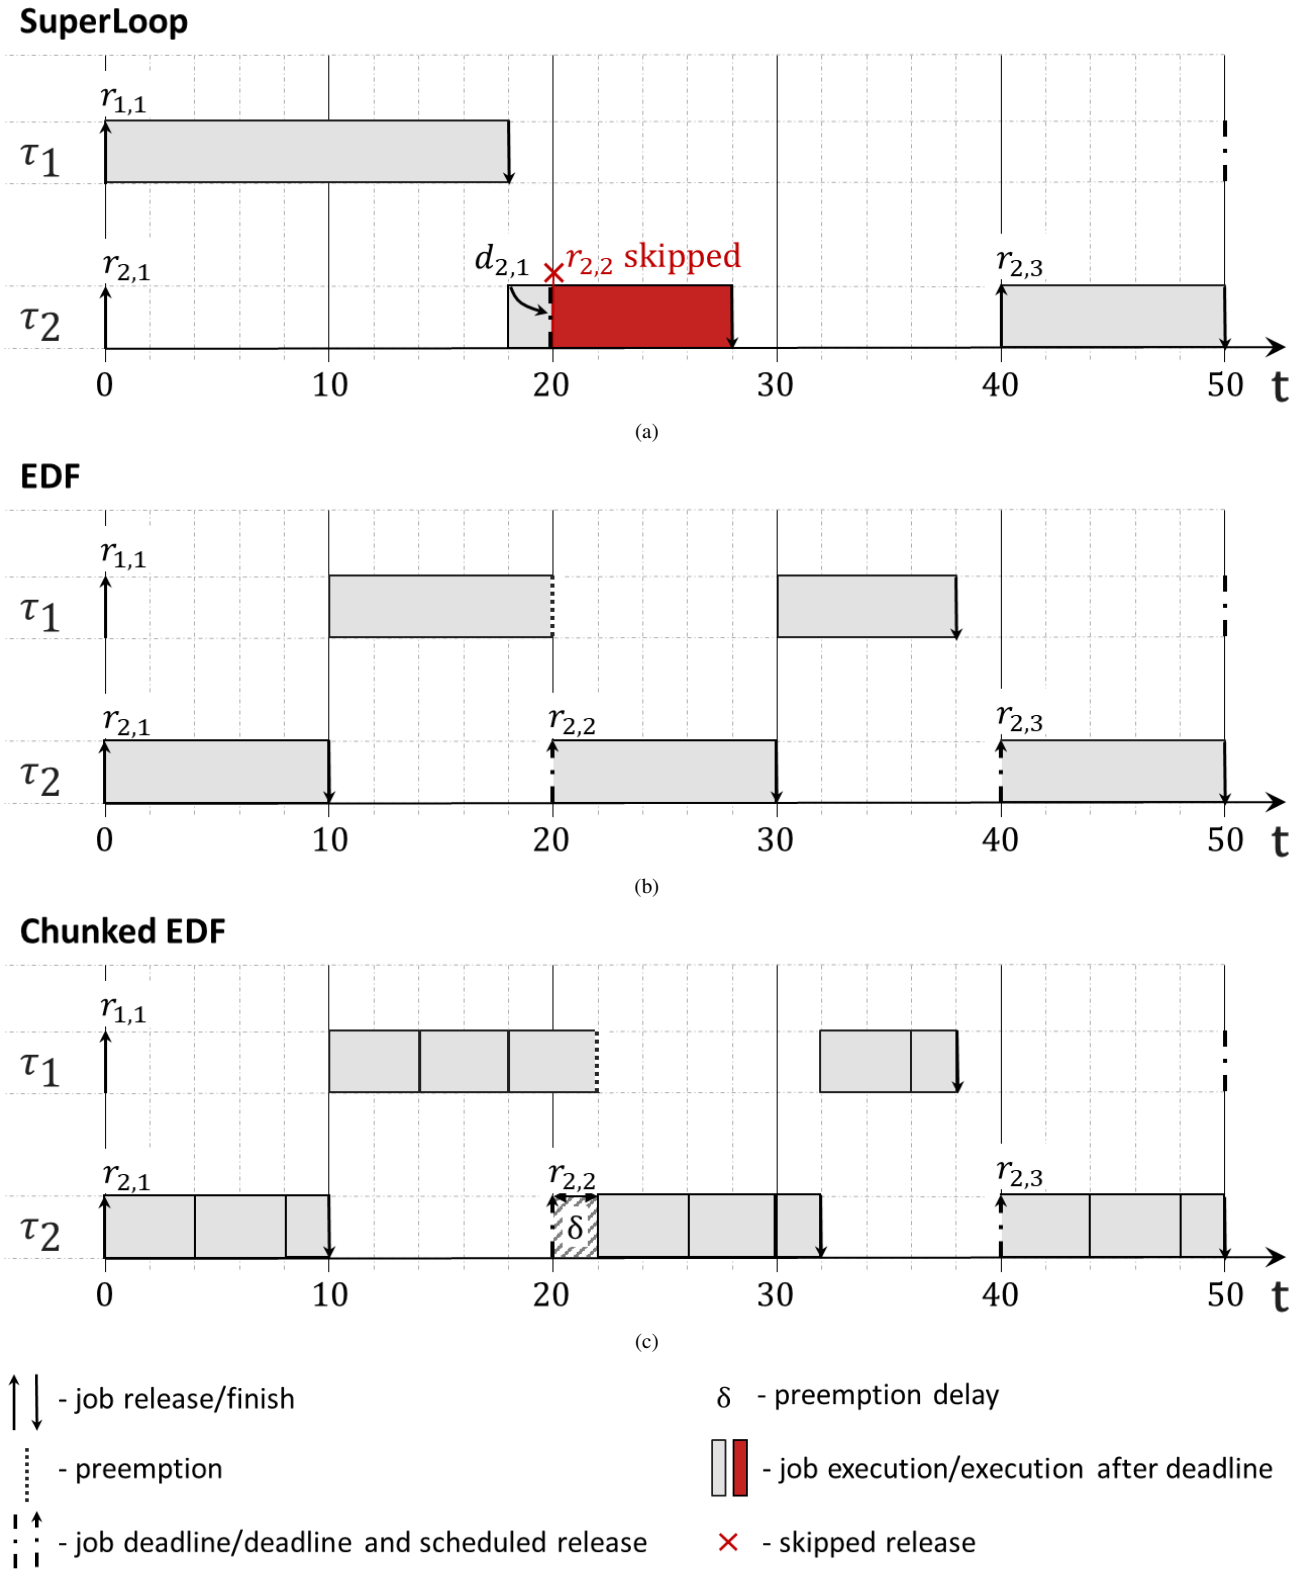


Fig. 2. Schedules for the same periodic task set under (a) SuperLoop, (b) EDF, and (c) chunked EDF.

REFERENCES

[1] *STM32F765xx, STM32F767xx, STM32F768Ax, STM32F769xx: Datasheet*, STMicroelectronics. [Online]. Available: https://www.st.com/resource/en/datasheet/stm32f767zi.pdf

[2] STMicroelectronics, "Process and environment monitoring," accessed: Oct. 6, 2026. [Online]. Available: https://www.st.com/en/applications/factory-automation/process-and-environment-monitoring.html

[3] ——, "Condition monitoring / predictive maintenance," accessed: Oct. 6, 2026. [Online]. Available: https://www.st.com/en/applications/factory-automation/condition-monitoring-predictive-maintenance.html

[4] Arm Keil, "Execution models: Single task system (Superloop)," accessed: Oct. 4, 2026. [Online]. Available: https://www.keil.com/pack/doc/mw/Graphic/html/gui_exec_model.html

[5] C. L. Liu and J. W. Layland, "Scheduling algorithms for multiprogramming in a hard-real-time environment," *Journal of the ACM*, vol. 20, no. 1, pp. 46–61, Jan. 1973.

[6] *DHT11 Humidity & Temperature Sensor: Technical Data Sheet*, Aosong Electronics. [Online]. Available: https://www.mouser.com/datasheet/2/758/DHT11-Technical-Data-Sheet-Translated-Version-1143054.pdf

[7] *Ultrasonic Ranging Module HC-SR04*, Elecfreaks. [Online]. Available: https://cdn.sparkfun.com/datasheets/Sensors/Proximity/HCSR04.pdf

[8] *OV2640 Datasheet*, OmniVision Technologies. [Online]. Available: https://www.uctronics.com/download/OV2640_DS.pdf

[9] *SPW2430HR5H-B: Top Port SiSonic Microphone*, Knowles Electronics. [Online]. Available: https://www.mouser.com/datasheet/2/218/SPW2430HR5H-B-1290924.pdf

[10] A. Burmyakov and E. Bini, "Improving the efficiency of global EDF exact schedulability test," *IEEE Transactions on Computers*, pp. 1–14, 2026.