

TEST CERTIFICATE

Name:Screw Spike(class 8.8)

Contract No: 9439


Material: 45#

Specification: Φ26×190

Quantity:4800(Pieces)

Inspection date:2025.08.16

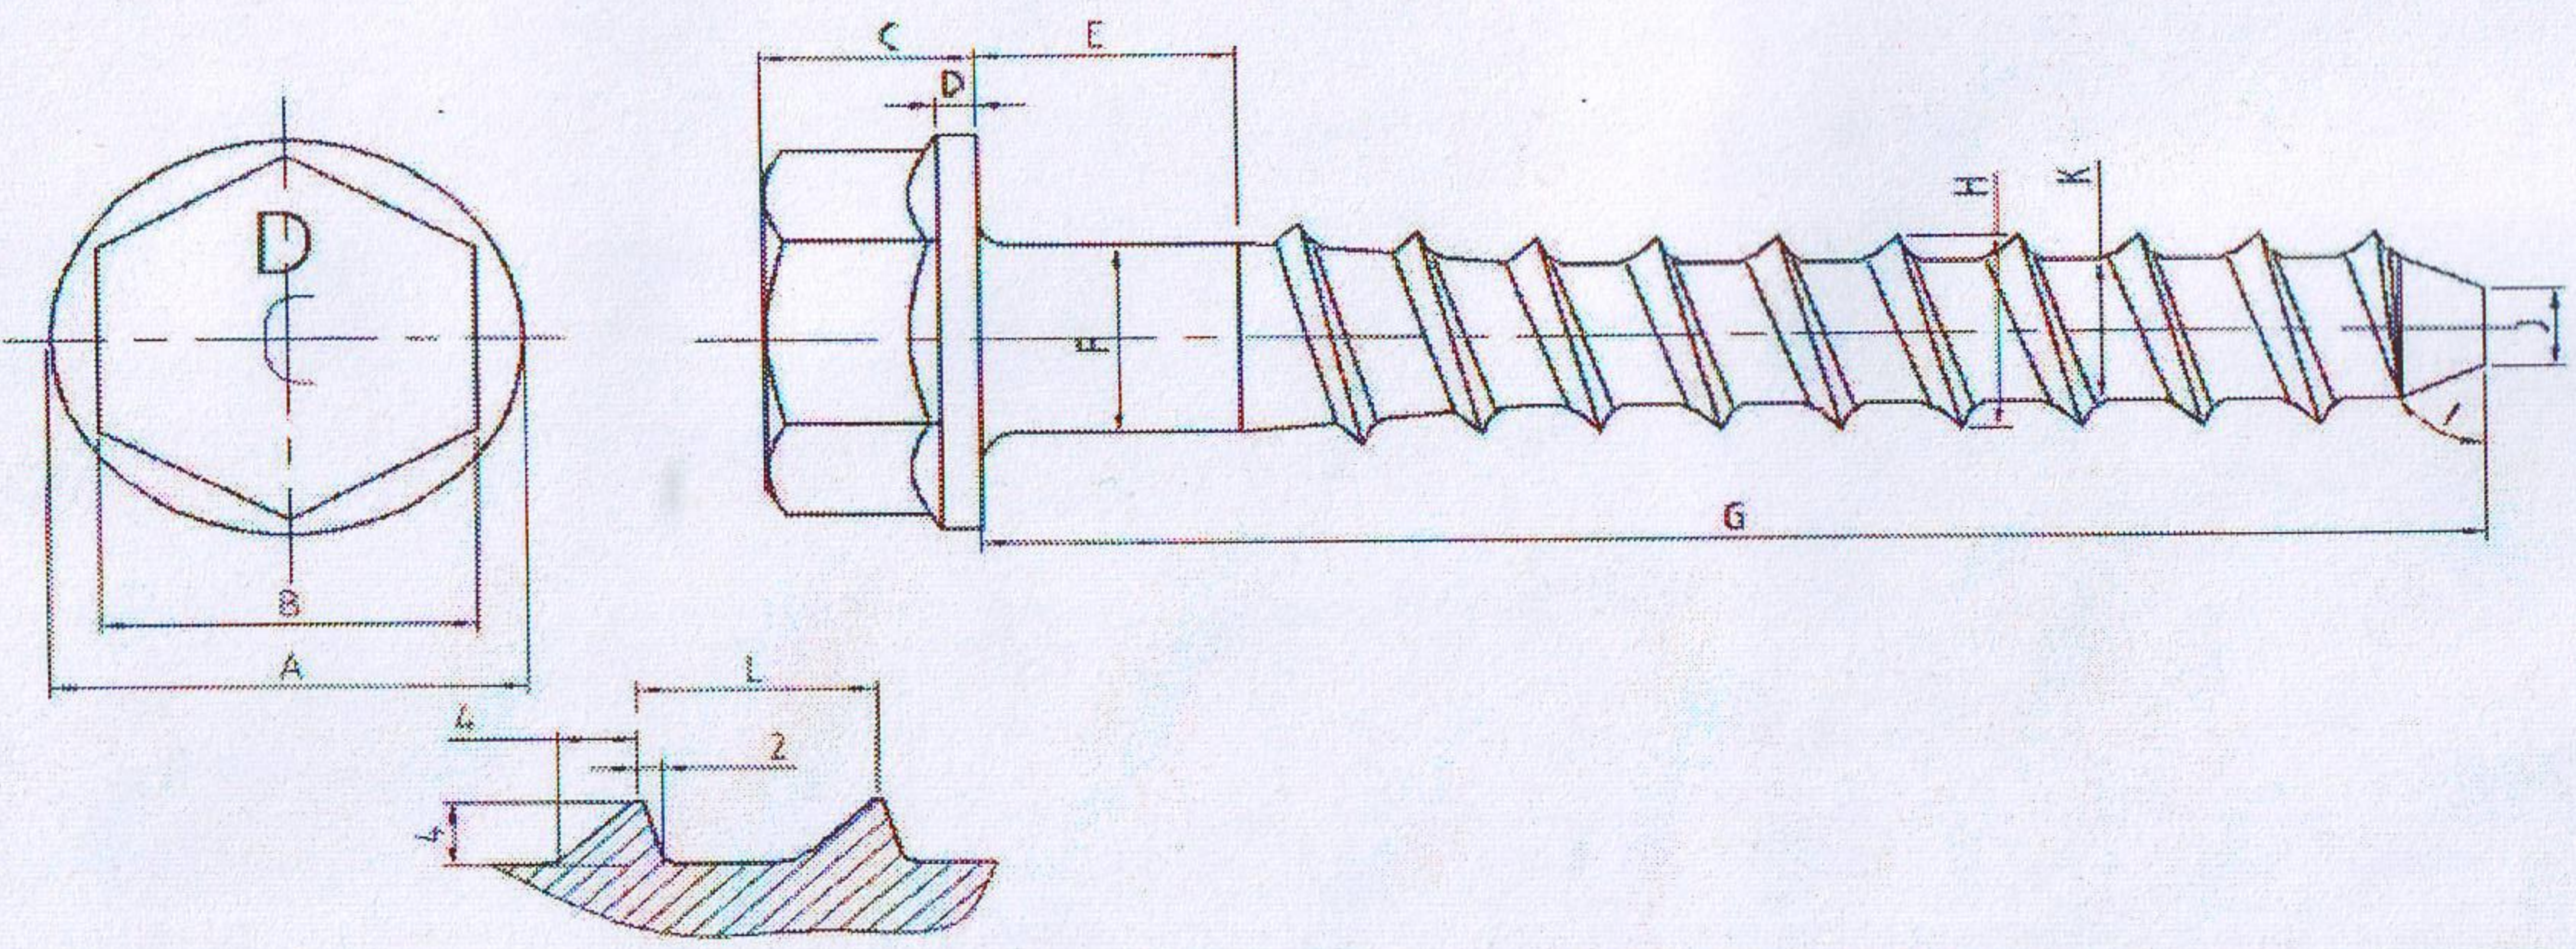

TESTING CENTER																								
Heat No.	Chemical Composition					Mechanical Properties			Dimension												Coating (hot dipgalv anise) ≥55 μ m	Result		
	C%	Si%	Mn%	P%	S%	Tensile Strength N/mm ²	Yield Point N/mm ²	Elong ation %	A	B	C	D	E	F	G	H	I	J	K	L				
	0.42~ 0.50	0.17~ 0.37	0.50~ 0.80	≤ 0.035	≤ 0.035				Φ 48.2~ 50	40~41	22~23	3.75~ 4.25	33~37	Φ 25~26	187~ 193	Φ 23.5~ 24.5	60°	Φ 10	Φ 15.5~ 16.5	12.0~ 13.0				
	≥830	≥660	≥12																					
625070399	0.45	0.21	0.61	0.018	0.005	908	718	15	49.3	40.3	22.3	4.0	34.6	25.3	190.4	24.0	ok	10.2	16.0	12.6	81	Pass		
	0.45	0.21	0.61	0.018	0.005	916	698	14	49.4	40.2	22.2	3.9	36.3	25.4	189.1	23.9	ok	10.3	15.9	12.5	70	Pass		
	0.45	0.21	0.61	0.018	0.005	921	713	14	49.3	40.2	22.4	4.1	35.1	25.3	191.5	24.0	ok	10.4	16.0	12.4	65	Pass		
	0.45	0.21	0.61	0.018	0.005	905	706	16	49.4	40.3	22.3	3.9	34.8	25.2	189.2	24.1	ok	10.4	16.1	12.5	88	Pass		
	0.45	0.21	0.61	0.018	0.005	895	687	16	49.2	40.4	22.4	4.0	35.9	25.3	191.8	23.9	ok	10.5	15.9	12.6	94	Pass		
																								

We hereby certify, that the material described above has been tested and complies with the terms of the order contract.

Inspector:Zhang-QuanHui

Checking:Yang-LiCheng



产品质量证明书
MILL TEST CERTIFICATE



品质记录编号: JL/ZG-207-A

客户名称 Sold To		常州市鑫上宇物资有限公司						产品名称 Product		热轧盘条 Hot rolled wirerods															
收货单位 Consignee		常州市鑫上宇物资有限公司						提货编单号 Delivery no.		FB2507190164		证明书编号 Certificate no.		250720Q00031											
执行标准 Spec.		GB/T 4354-2008		牌号 Grade		45		加工用途 Purpose		客户编号 Customer no.		0026041		订单编号 Order no.		02507190230									
										客户采购案号 Cust Order No.				证明书日期 Issue Date		20250720									
生产许可证号 Approvalcerf No.				钢筋标识 Bar Mark				交货状态 Cond. Of Supply		热轧		车船号 Train/Ship No.		苏CNQ705											
项次 Item No.	轧制序号 Lot No.	炉号 Heat No.	尺寸及规格Material Description			化学成分 % Chemical Analysis								*A02 抗拉 强度 (Rm)	*A05 断面 收缩 率(Z)	*E01 金相 组织	*E08 完全 脱碳 层深 度								
			产品尺寸 Product Size	数量 件 Qty	重量 t Weight	C	Si	Mn	P	S	Cr	Ni	Cu												
						X10 ⁻²	X10 ⁻²	X10 ⁻²	X10 ⁻³	X10 ⁻³	X10 ⁻²	X10 ⁻²	X10 ⁻²												MPa
规格 Specification			42 50	17 37	50 80	35 MAX	35 MAX	25 MAX	30 MAX	25 MAX															
001	K2506280042	625010359	Φ 26mm	1	2.448	45	22	60	13	22	7	2	2	625	29	OK	0								
001	K2507110011	625070123	Φ 26mm	1	2.447	44	20	66	15	6	9	2	2	624	30	OK	0								
001	K2507110012	625070400	Φ 26mm	1	2.445	46	21	60	16	14	8	2	3	621	28	OK	0								
001	K2507110013	625070399	Φ 26mm	7	17.147	45	21	61	18	5	7	2	2	627	30	OK	0								
														639	29	OK	0								
														635	30	OK	0								
														646	29	OK	0								
														627	29	OK	0								
TOTAL:				10	24.487																				
注释 note		外观、形状、尺寸和标识依据中间检查记录判定为合格 ACCORDING TO PROCESS INSPECTION RECORD,VISUAL INSPECTION(SURFACE&SHAPE) AND CHECK OF DIMENSION&MARK: OK 注：产品牌号以质量证明书为准																							
CE 0038		1、兹证明本表所列产品，均依材料规格制造及试验，并且符合规范之要求。11月、12月、1月、2月、3月：Φ5.5、Φ6.5时效14天，Φ8.0-Φ11时效16天，≥Φ12时效18天；其它月份：Φ5.5、Φ6.5时效7天，Φ8.0-Φ11时效10天，≥Φ12时效12天。It is to certify that the products described herein have been manufactured and tested with satisfactory results in accordance with the requirements of the material specification. The aging time for Φ5.5 and Φ6.5, Φ8.0-Φ11, and ≥Φ12 should be 14 days, 16 days and 18 days respectively during November, December, January, February and March, while 7 days, 10 days and 12 days respectively in the other months. 2、品质证明书影本不作有效证明文件。The copy of this Certificate is invalid except stamped. 3、用户验收后使用，如有异议应详细告知其牌号，炉号，并保留实物及标志。Please inform us the steel grade and the heat number of under qualifiedmaterial(s) found in inspection on time, and keep the material(s) and the marking card.												质量管理处 GENERAL MANAGER, REASEARCH and DEVELOPMENT DEPARTMENT 李松申								综合判定 Comprehensive Judgment 质检专用章 2			