
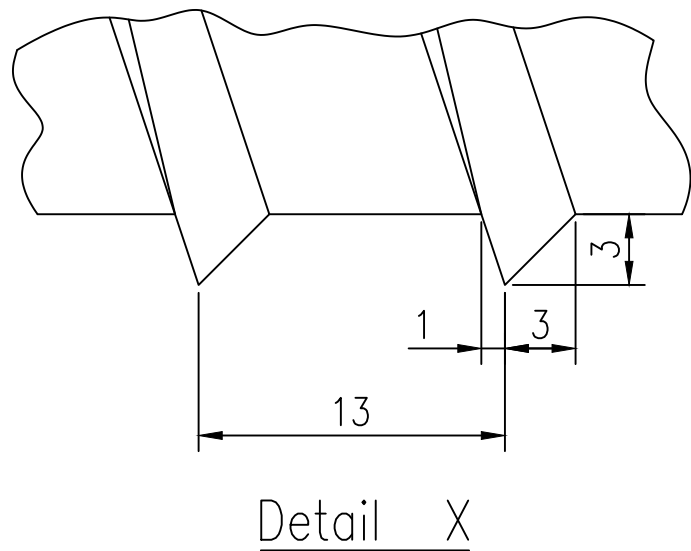


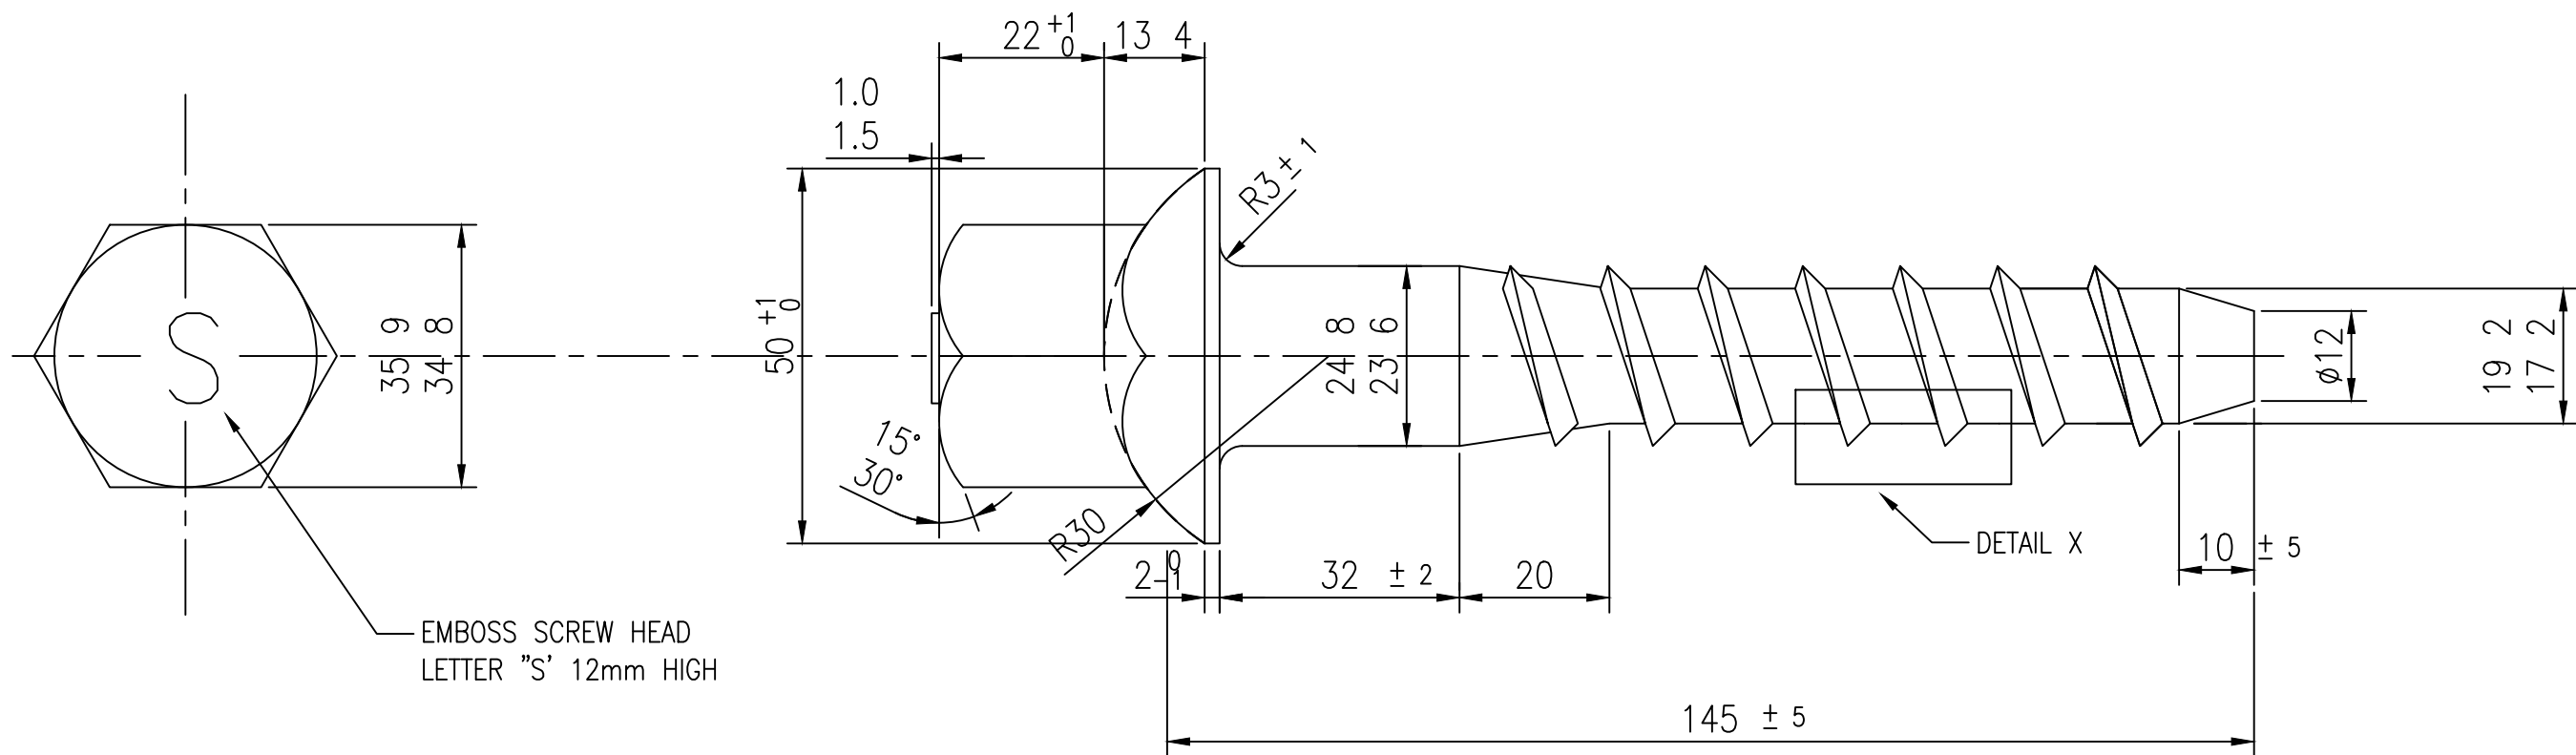

Notes.

Hot dipped galvanising : to AS 1214 or equivalent
Manufactured to the requirements of German Federal Railways
Specification TL91824 and UIC Standard 864-IV
Material: Mild Steel Grade 5.6
Tolerance on thread profile ± 0.2mm

				BREAK ALL SHARP EDGES AND CORNERS 0.5 MAX.					
		JAN '16 N.G.	DATE: BY:			DELKOR RAIL PTY LIMITED			
		NOTE CORRECTED: CHANGED "R" TO "S"	DESCRIPTION	SYDNEY					
				SCREWSPIKE – MARK "S"					
		A	REV.	DRAWN	J.D.	NOV '11	SCALE 1 : 1	DRG. NO. DR.SS.S.01	REV. A
				CHECKED	P.S.	NOV '11			
				APPROVED	P.S.	NOV '11			
THIS DRAWING AND THE COPYRIGHT THEREIN IS THE PROPERTY OF DELKOR RAIL PTY LIMITED. IT MAY NOT BE COPIED WHOLLY OR IN PART AND IT MAY NOT BE LOANED OR DISCLOSED TO OTHERS WITHOUT THE PRIOR WRITTEN CONSENT OF DELKOR RAIL PTY LIMITED. ALL SUCH AUTHORISED COPIES MUST BEAR THIS NOTICE. THIS DRAWING MUST BE RETURNED AS SOON AS THE PURPOSE FOR WHICH IT WAS MADE AVAILABLE HAS BEEN SERVED.									