

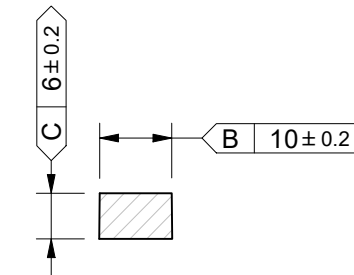
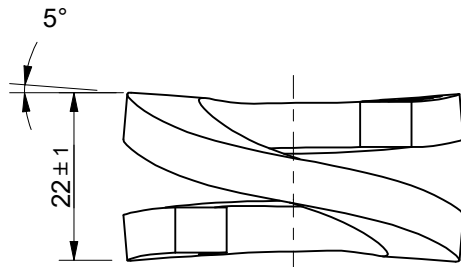


REV	DESCRIPTION	DATE	BY	CHK
A	ISSUED FOR DISTRIBUTION	12-JUN-20	AF	RB

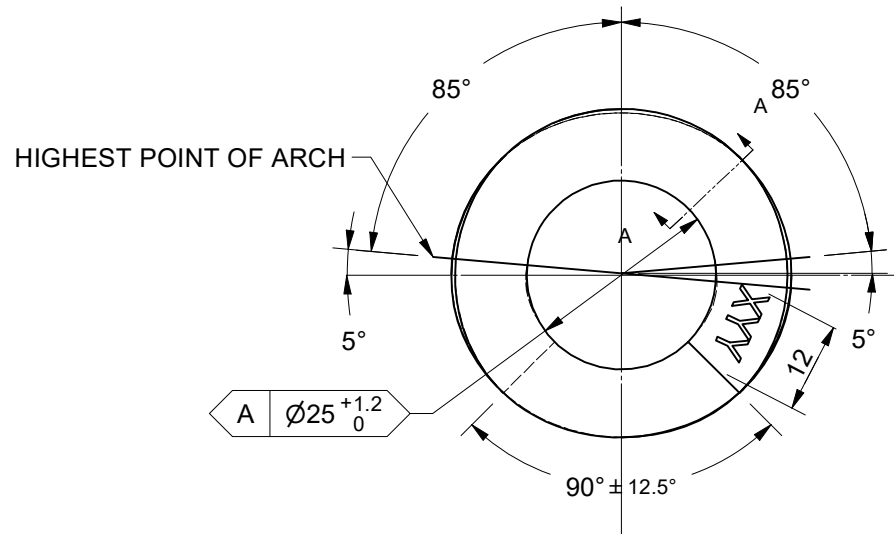

SECTION A-A

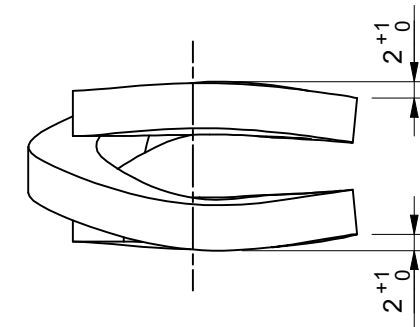


NOTES

- DIMENSIONS ARE FOR FINISHED UNLOADED PRODUCT
- DISTANCE BETWEEN TWO SPRING WASHER ARCHES AT A LOAD OF 35kN, MIN 1.0mm AT 4mm DEPTH AS MEASURED FROM OUTSIDE. RELIEVING SPRING WAY 40-10kN = 0.75mm.
- STAND HEIGHT = 17.8mm AT 40kN AFTER 10 SECONDS
- MATERIAL - SPEC-ACC-FE6

MARKING AND IDENTIFICATION

4mm LETTERING, 0.5mm RECESSED

- X - MANUFACTURER MARK
- YY - YEAR OF MANUFACTURE

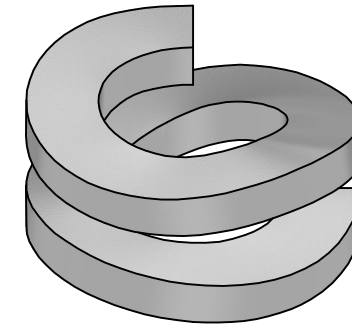

DRAWN	
AF	23-APR-2020
CHECKED	
RB	12-JUN-2020



DELKOR RAIL - SPRING WASHER
Fe6 - HIGH TENSION DOUBLE HELICAL
MANUFACTURING DRAWING

DRAWING No. ACC-FE6-01		
SCALE (A4) 1:1		REVISION A