


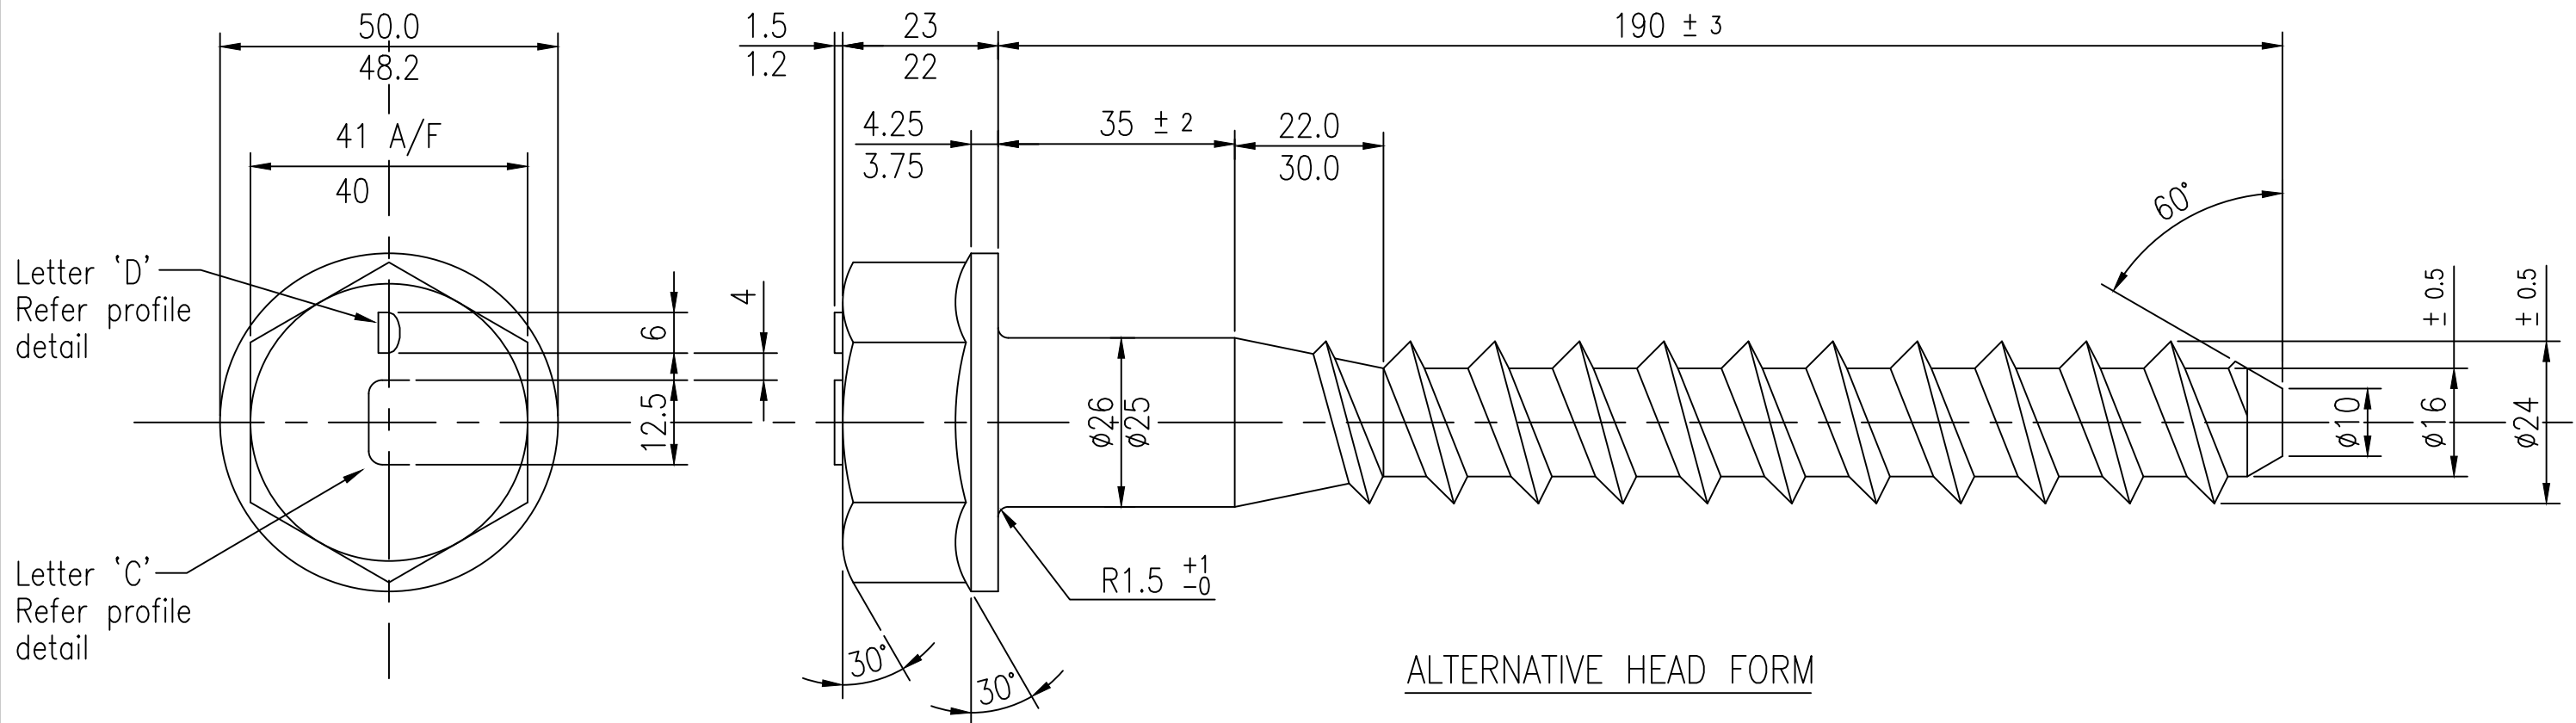


ALTERNATIVE HEAD FORM

Material.


Steel A.S. 1252-1983 or equivalent
Grade 8.8

Notes.

Hot dipped galvanising : to AS 1214 - Current Edition (or DIN 50 596)
Manufactured to the requirements of German Federal Railways
Specification TL91824 and UIC Standard 864-IV

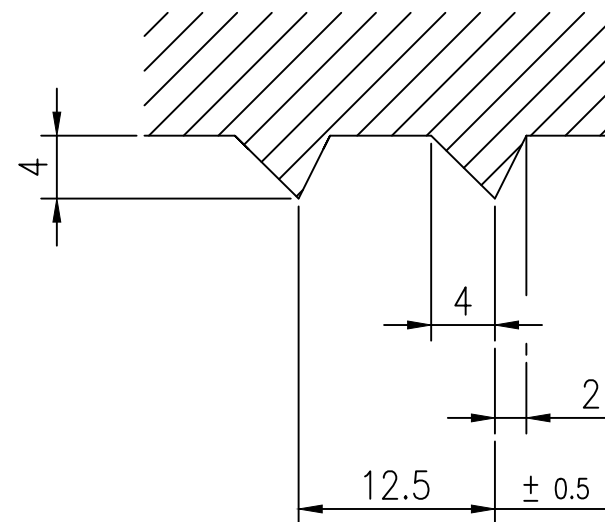

THREAD FORM DETAIL
SCALE 2 : 1

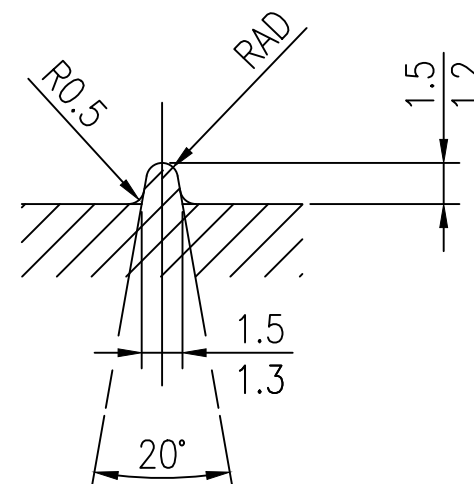

BRANDING PROFILE FOR LETTER 'C' & 'D'
SCALE 4 : 1

Reference Drawing HSR 602F

BREAK ALL SHARP EDGES AND CORNERS 0.5 MAX.



DELKOR RAIL PTY LIMITED
SYDNEY

QR SLEEPER SCREW SPIKE
Ø26 x 190 mm
8.8 GRADE H.T.

DRAWN	M.F.	FEB '14
CHECKED	R.T.	FEB '14
APPROVED	R.T.	FEB '14

SCALE
1 : 1

DRG. NO.

QR-C-01

REV.



THIS DRAWING AND THE COPYRIGHT THEREIN IS THE PROPERTY OF DELKOR RAIL PTY LIMITED. IT MAY NOT BE COPIED WHOLLY OR IN PART AND IT MAY NOT BE LOANED OR DISCLOSED TO OTHERS WITHOUT THE PRIOR WRITTEN CONSENT OF DELKOR RAIL PTY LIMITED. ALL SUCH AUTHORISED COPIES MUST BEAR THIS NOTICE. THIS DRAWING MUST BE RETURNED AS SOON AS THE PURPOSE FOR WHICH IT WAS MADE AVAILABLE HAS BEEN SERVED.