
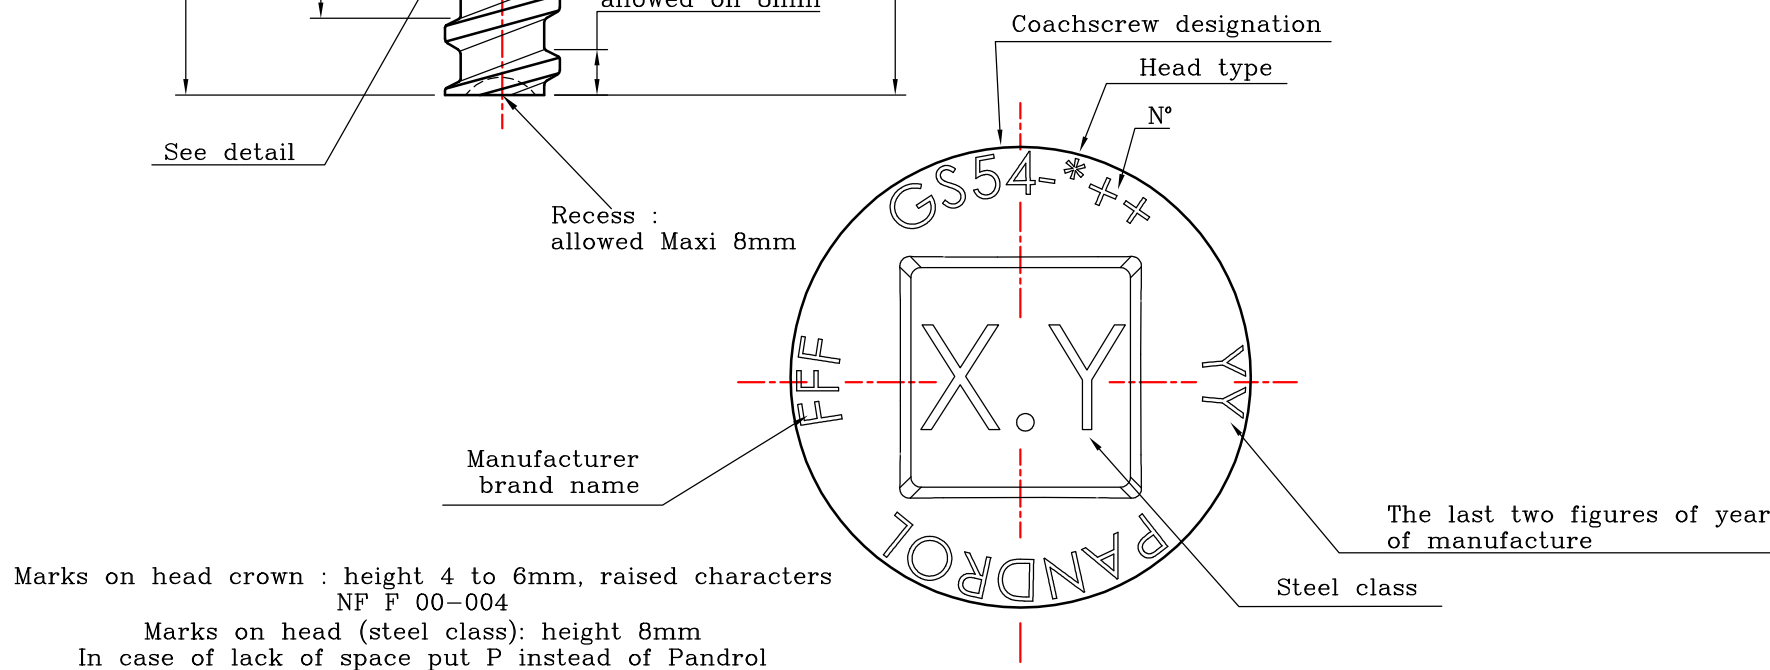
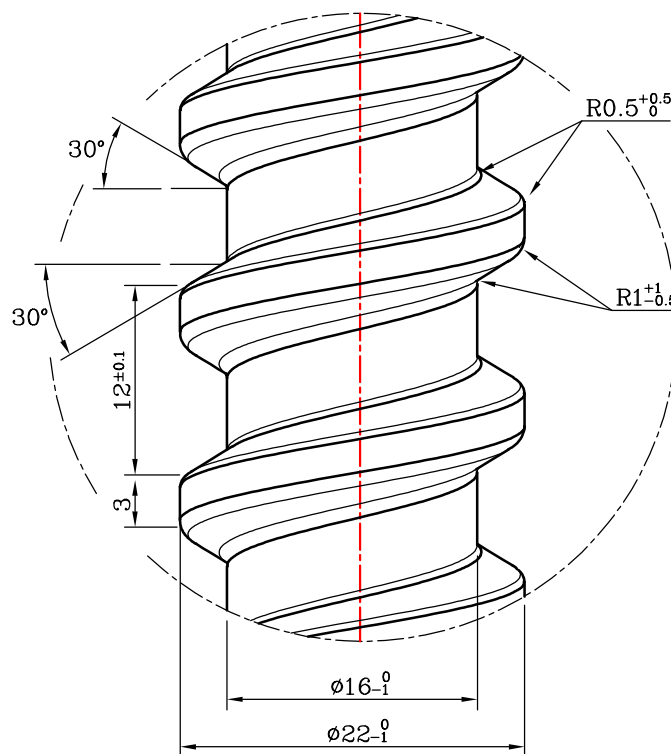


DETAIL Scale: 3

SEE TYPES OF HEADS
(Drawing E225/235f)

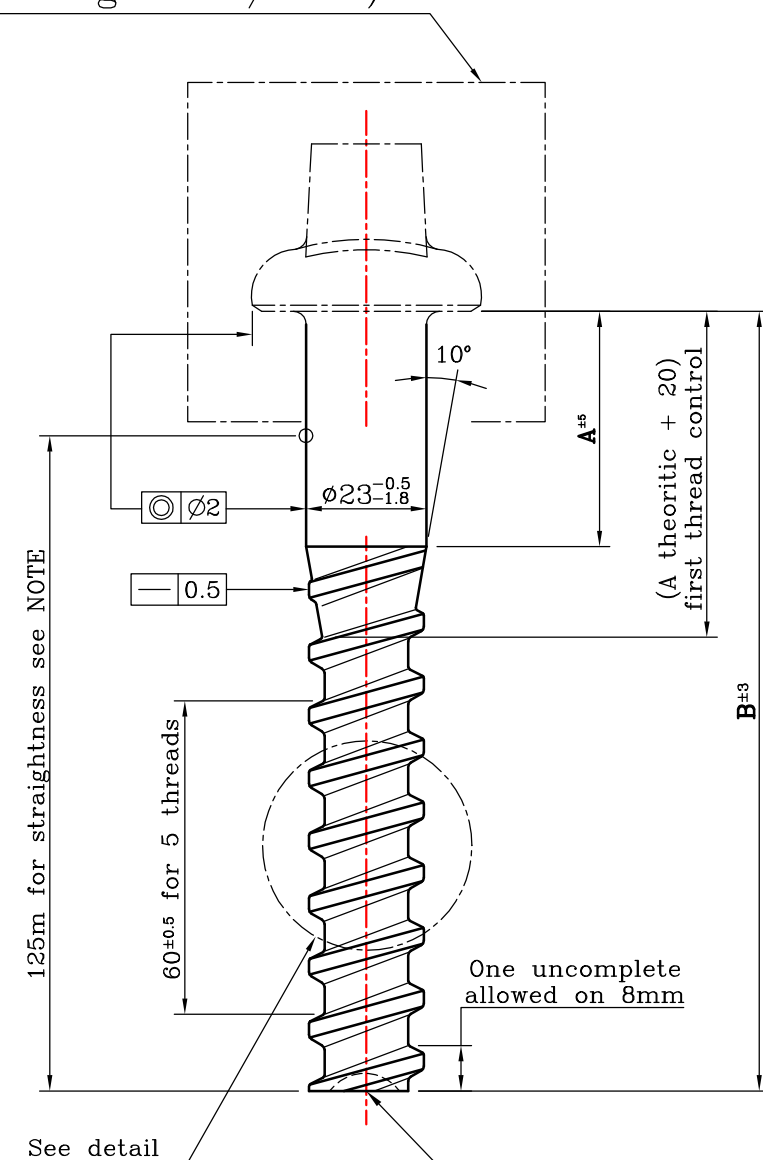

NOTA:

- Inspection according to U.I.C. 864-1-0:
- Bending test at 15°: §1.6.1 and §2.3.3.2.2.
- Straightness to be checked with gauge:
tube inside $\phi 22.5$ (0,+0.05), lenght: 125mm.
- Steel class: to be specified at order.

N°	A ± 5	B ± 3	Theoretical volume (cm3)
1	25	129	56.4
2	30	134	58.4
3	35	139	60.5
4	40	144	62.6
5	45	149	64.7
6	50	154	66.7
7	55	159	68.8
8	60	164	70.9
9	65	169	73
10	70	174	75.1
11	75	179	77.1
12	80	184	79.2
13	85	189	81.3
14	90	194	83.4
15	95	199	85.4
16	100	204	87.5
17	105	209	89.6
18	110	214	91.7

Designation: GS coachscrew – Head Type – Screw N°
Exemple: coachcrew "GS54-B5", class 8.8

GS54 COACHSCREW Ø22			
Material: See norm.	Weight: /	Technical specifications: UIC 864-1-0	
		Track Fastening Systems Etablissement de DOUAI 205, rue de St-Je Nobile - BP 201 59504 Douai Cedex-FRANCE Tel: +33(0)3 27 65 64 00 - Fax: +33(0)3 27 99 93 99 management@railtech.fr - www.railtech.fr	
		This document belongs exclusively to RAILTECH INTERNATIONAL and cannot be reproduced or diffused without it's written agreement.	
		Drawn: Q.Wroblak Date: 06/05/2020	Scale: 1/1 Size: A2
		Modifications: Added of the theoriacal volume	
N° Drawing: E225/054		Checked & Approved: AD.1	