

苏州苏德兰铁路配件有限公司尺寸检测报告

DIMENSIONAL TEST REPORT

品名 Product Name: 螺纹道钉 Screw Spike

合同编号 Contract NO: CA2501508

规格 Size: $\varnothing 23 \times 149$

检测日期 Inspection date: 2025.04.18

等级 Grade: Gr5.6, UIC864-1

发货日期 Date of shipment: 2025.05.28

标记 Mark: PANDROL SDL 5.6 GS54-B5 25




序号 No	检测项目 Test feature	技术要求 Specification	实测数值 Actual Size	结果 Result
1	圆盘直径 head diameter	$\varnothing 44 +0/-1$	43.3~43.8	OK
2	圆盘直径 head diameter	$\varnothing 40 +0/-1$	39.4~39.7	OK
3	方头顶宽度 top of head breadth	21 +0/-1	20.3~20.6	OK
4	方头底宽度 bottom of head	23 +0/-1	22.2~22.6	OK
5	头部高度 head total length	20 +2/-0	20.7~21.3	OK
6	头部R radius of head	R50	R50	OK
7	头部R radius of head	R10	R10	OK
8	头部R radius of head	R2.5 +0.5/-0	R2.5	OK
9	头部总高 head total length	32 +2/-0	32.7~33.3	OK
10	杆部直径 shank diameter	$\varnothing 23 -0.5/-1.8$	21.4~21.6	OK
11	杆部总长 shank length	149 $\pm$ 3	146.3~150.4	OK
12	白杆长度 unthreaded shank	45 $\pm$ 5	42.1~45.5	OK
13	螺纹内径 Core diameter	$\varnothing 16 +0/-1$	15.2~15.6	OK
14	螺纹外径 Outside diameter	$\varnothing 22 +0/-1$	21.2~21.6	OK
15	单牙距 single screw pitch	12 $\pm$ 0.1	11.95~12.05	OK
16	5牙距 screw pitch	60 $\pm$ 0.5	59.7~60.2	OK
17	牙高 screw height	3	2.9~3.1	OK
18	牙尖宽度 Tooth width	3	2.9~3.1	OK
19	螺纹底部R角 Thread R angle	R1 +1/-0.5	R1	OK
20	螺纹底部R角 Thread R angle	R0.5 +0.5/-0	R1	OK
21	螺纹头部R角 Thread R angle	R1 +1/-0.5	R1	OK
22	螺纹头部R角 Thread R angle	R0.5 +0.5/-0	R1	OK
23	尖部深度 Point depth	≤ 8	3.2~5.5	OK
24	表面处理 surface treatment	电镀白锌 $\geq 12 \mu m$ White Zinc plating	盐雾试验200小时无红锈 Salt spray test 200 hours without red rust	OK
数量 Quantity			36500件 (Pieces)	
检验 Inspector			张全恢 Zhang-QuanHui	
审核 In Charge			杨黎程 Yang-LiCheng	

苏州苏德兰铁路配件有限公司性能检测报告

PERFORMANCE TEST REPORT

品名 Product Name: 螺纹道钉 Screw Spike
规格 Size: $\varnothing 23 \times 149$
等级 Grade: Gr5.6, UIC864-1
标记 Mark : PANDROL SDL 5.6 GS54-B5 25

合同编号 Contract NO: CA2501508
检测日期 Inspection date: 2025.04.18
发货日期 Date of shipment: 2025.05.28
数量 Quantity: 36500 (件 Pieces)

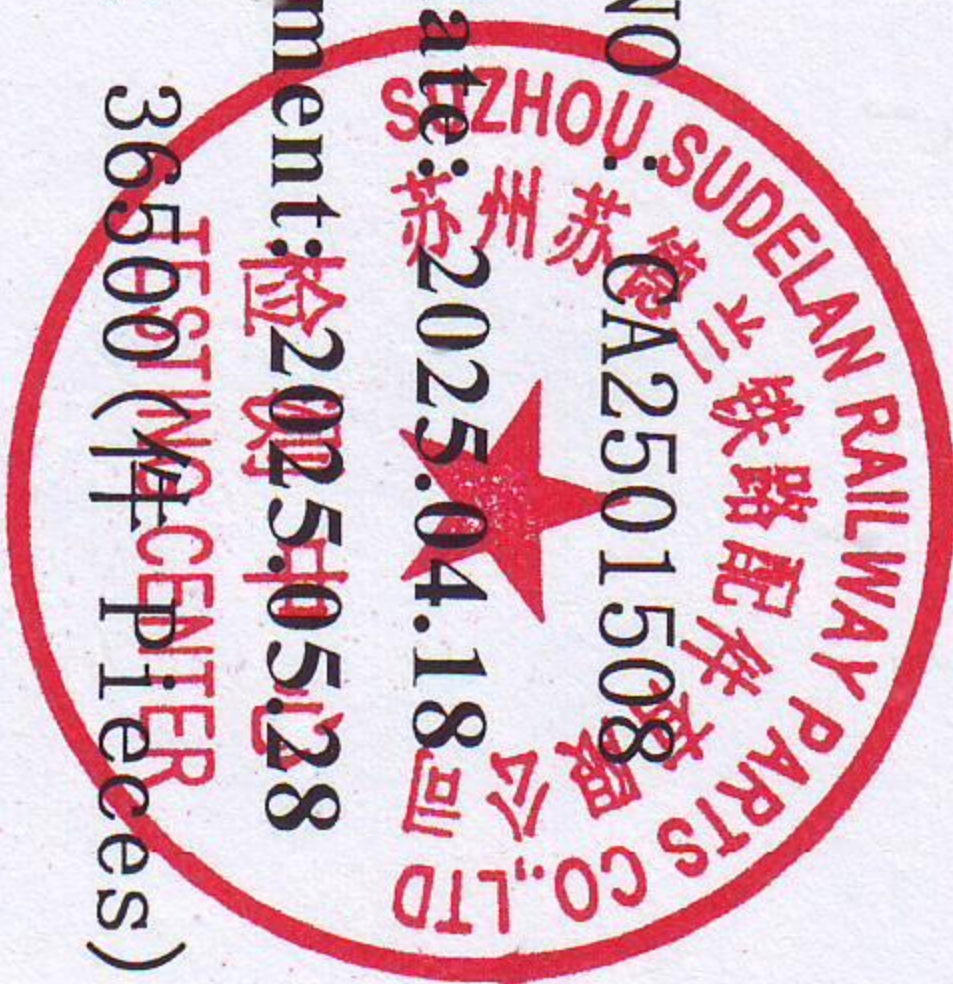

规格 Size	材料 Material	炉批号 Raw material Heat No	化学成分 Chemical composition (%)					机械性能 Mechanical properties				结果 Result
			C	S	Si	Mn	P	屈服强度 Yield strength	抗拉强度 Tensile Strength	延伸率 Elongation $\delta 5''$	冷弯 Bend Test	
$\varnothing 23 \times 149$	35K	G431012119	0.36	0.002	0.13	0.74	0.018	$\geq 300\text{Mpa}$	$\geq 500\text{Mpa}$	Min20%	15°	
								356	602	23	OK	OK
								365	590	24	OK	OK
								372	585	24	OK	OK
								347	606	23	OK	OK
								369	609	22	OK	OK

检验 Inspector: 张全恢 Zhang-QuanHui

审核 In Charge: 杨黎程 Yang-LiCheng



江苏沙钢集团有限公司
Jiangsu Shagang Group CO., LTD.
高速线材质量证明书

SG03B-1914E

江苏省张家港市锦丰镇 邮编: 215625

Jinfeng, Zhangjiagang, Jiangsu, P. R. CHINA

TEL: (0512) 58568866, 58568829

FAX: (0512) 58550366, 58550818

沙钢

High-speed Wire Rod Quality Certificate

订货单位CUSTOMER	宁波办事处	用户代码CUSTOMER CODE		合同号CONTRACT NO.	X51D0002Q007 X51D0002Q008
牌号STEEL GRADE	SWRCH35K	提货单号DELIVERY	250124095002	发货日期DATE OF DELIVERY	20250127
交 货 标 准 SPECIFICATION	Q/320582 SGV303-2024	质证书号CERTIFICATE NO.	2501240950 025303	签发日期DATE OF ISSUE	20250127
		用途USE		精炼方式REFINING MATHOD	炉外精炼

序号 NO	炉号 HEAT NO.	直径 Dia. mm.	盘数 Coils	重量 kg	化学成分CHEMICAL COMPOSITION %										拉伸试验TENSILE TEST			顶锻 试验 H. T.	硬度 试验 HRB	脱碳层 D. of D	晶粒度 Micro- Grade	索氏体 Sorbite %	备注 REMARKS					
					C	Si	Mn	P	S	Cr	Ni	Cu																
					2	2	2	3	3	2	2	2																

1	G431012119	22. 0	18	40469	36	13	74	18	2	2	1	1			589			47. 0	0	80. 00	0. 01	8		
2	G431012119	22. 0	22	49509	36	13	74	18	2	2	1	1			589			47. 0	0	80. 00	0. 01	8		
3	G431012404	24. 0	15	33314	35	15	75	17	2	3	1	1			584			44. 0	0	80. 00	0. 01	8		
4	G433009201	24. 0	18	39521	34	13	75	15	5	3	1	1			583			46. 0	0	81. 00	0. 01	8		

合计 Total				73	162813	说明 NOTES 1. 本质量证明书适用于合金线材; 本产品不含有任何辐射元素。 It is guaranteed that the products don't contain radiochemical imparities. 3. We, SHAGANG, hereby certify that the products specified in the present certificate have been fully processed in china. (facility and address information is stated above. *1. H. T.—Head-colding Test; *2 D. of D.—Depth of Decarburization;	1. 质量证明书复印件不作有效证明文件, 除非盖章; The copy of this Certificate is not valid except stamped. 2. 用户验货后使用如有异议应及时告知炉号、牌号, 并保留实物及标志。 Please inform us the steel grade and the heat number of under quanlified material(s) found in inspection on time, and keep the material(s) and the marking card	质检印章 SEAL (1)	签证人 VISA

综合判定 FINAL RESULT	合格 PASS	注意事项 ATTENTIVE ITEMS	
-------------------------	------------	----------------------------	--

