


SEE TYPES OF HEADS
(Drawing E225/235f)

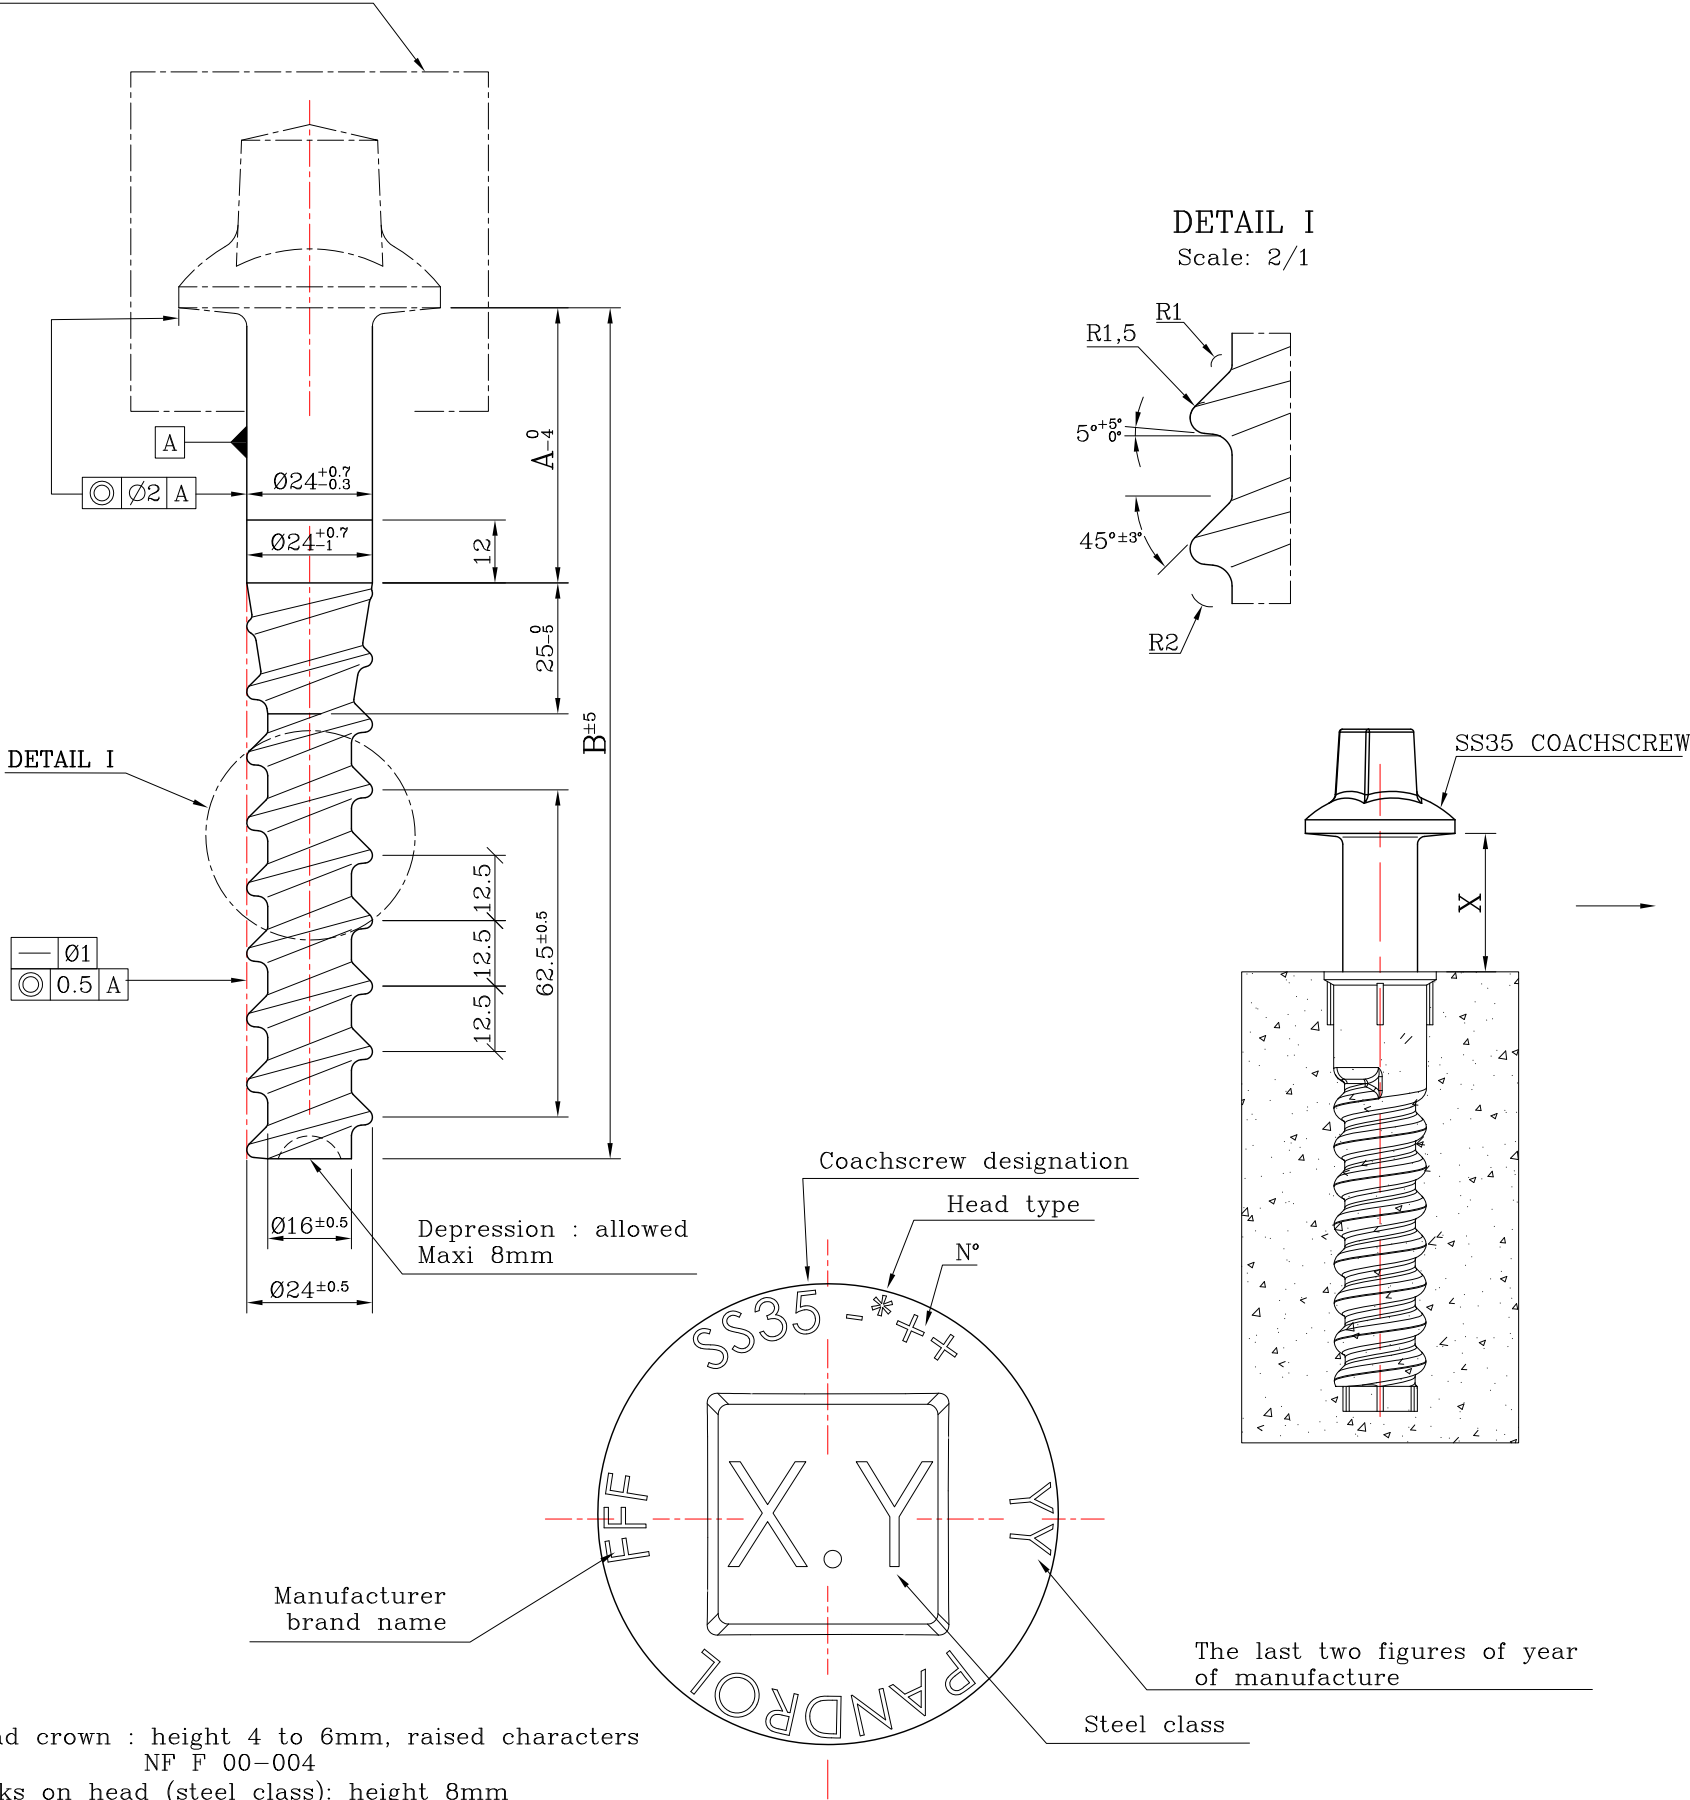

Marks on head crown : height 4 to 6mm, raised characters
NF F 00-004
Marks on head (steel class): height 8mm

- NOTA:
- Inspection according to U.I.C. 864-1-0:
 - Steel class: to be specified at order.

N°	Dimension of assembly X (for definition of N°)	Dimension A ₄ ⁰	Dimension B ^{±5}
1	10 < X ≤ 15	16	126
2	15 < X ≤ 20	21	131
3	20 < X ≤ 25	26	136
4	25 < X ≤ 30	31	141
5	30 < X ≤ 35	36	146
6	35 < X ≤ 40	41	151
7	40 < X ≤ 45	46	156
8	45 < X ≤ 50	51	161
9	50 < X ≤ 55	56	166
10	55 < X ≤ 60	61	171
11	60 < X ≤ 65	66	176
12	65 < X ≤ 70	71	181
13	70 < X ≤ 75	76	186
14	75 < X ≤ 80	81	191
15	80 < X ≤ 85	86	196
16	85 < X ≤ 90	91	201
17	90 < X ≤ 95	96	206
18	95 < X ≤ 100	101	211

Designation: SS coachscrew – Head Type – Screw N°
Exemple: "coachcrew SS35" B5, class 8.8

SS35 COACHCREW Ø24			
Material: See norm.	Weight: /	Technical specifications: UIC 864-1-0	
		Track Fastening Systems Etablissement de DOUAI 205, rue de St-le Moide - BP 261 59584 Douai Cedex-FRANCE Tél:+33(0)3 27 65 64 00 - Fax +33(0)3 27 99 92 99 management@railtech.fr - www.railtech.fr	
		This document belongs exclusively to RAILTECH INTERNATIONAL and cannot be reproduced or diffused without it's written agreement.	
		Drawn: B. HENOCQ Date: 04/02/2020	Scale: 1/1 Size : A2
		Modifications: changing of the logo type + added ECR number (0162)	
N° Drawing: E225/243		Checked & Approved: Revision: D.1	