

TEST CERTIFICATE

Name:Screw Spike(class 8.8)

Contract No: 9584


Material: 45#

Specification: Φ26×190

Quantity:8000(Pieces)

Inspection date:2026.05.28

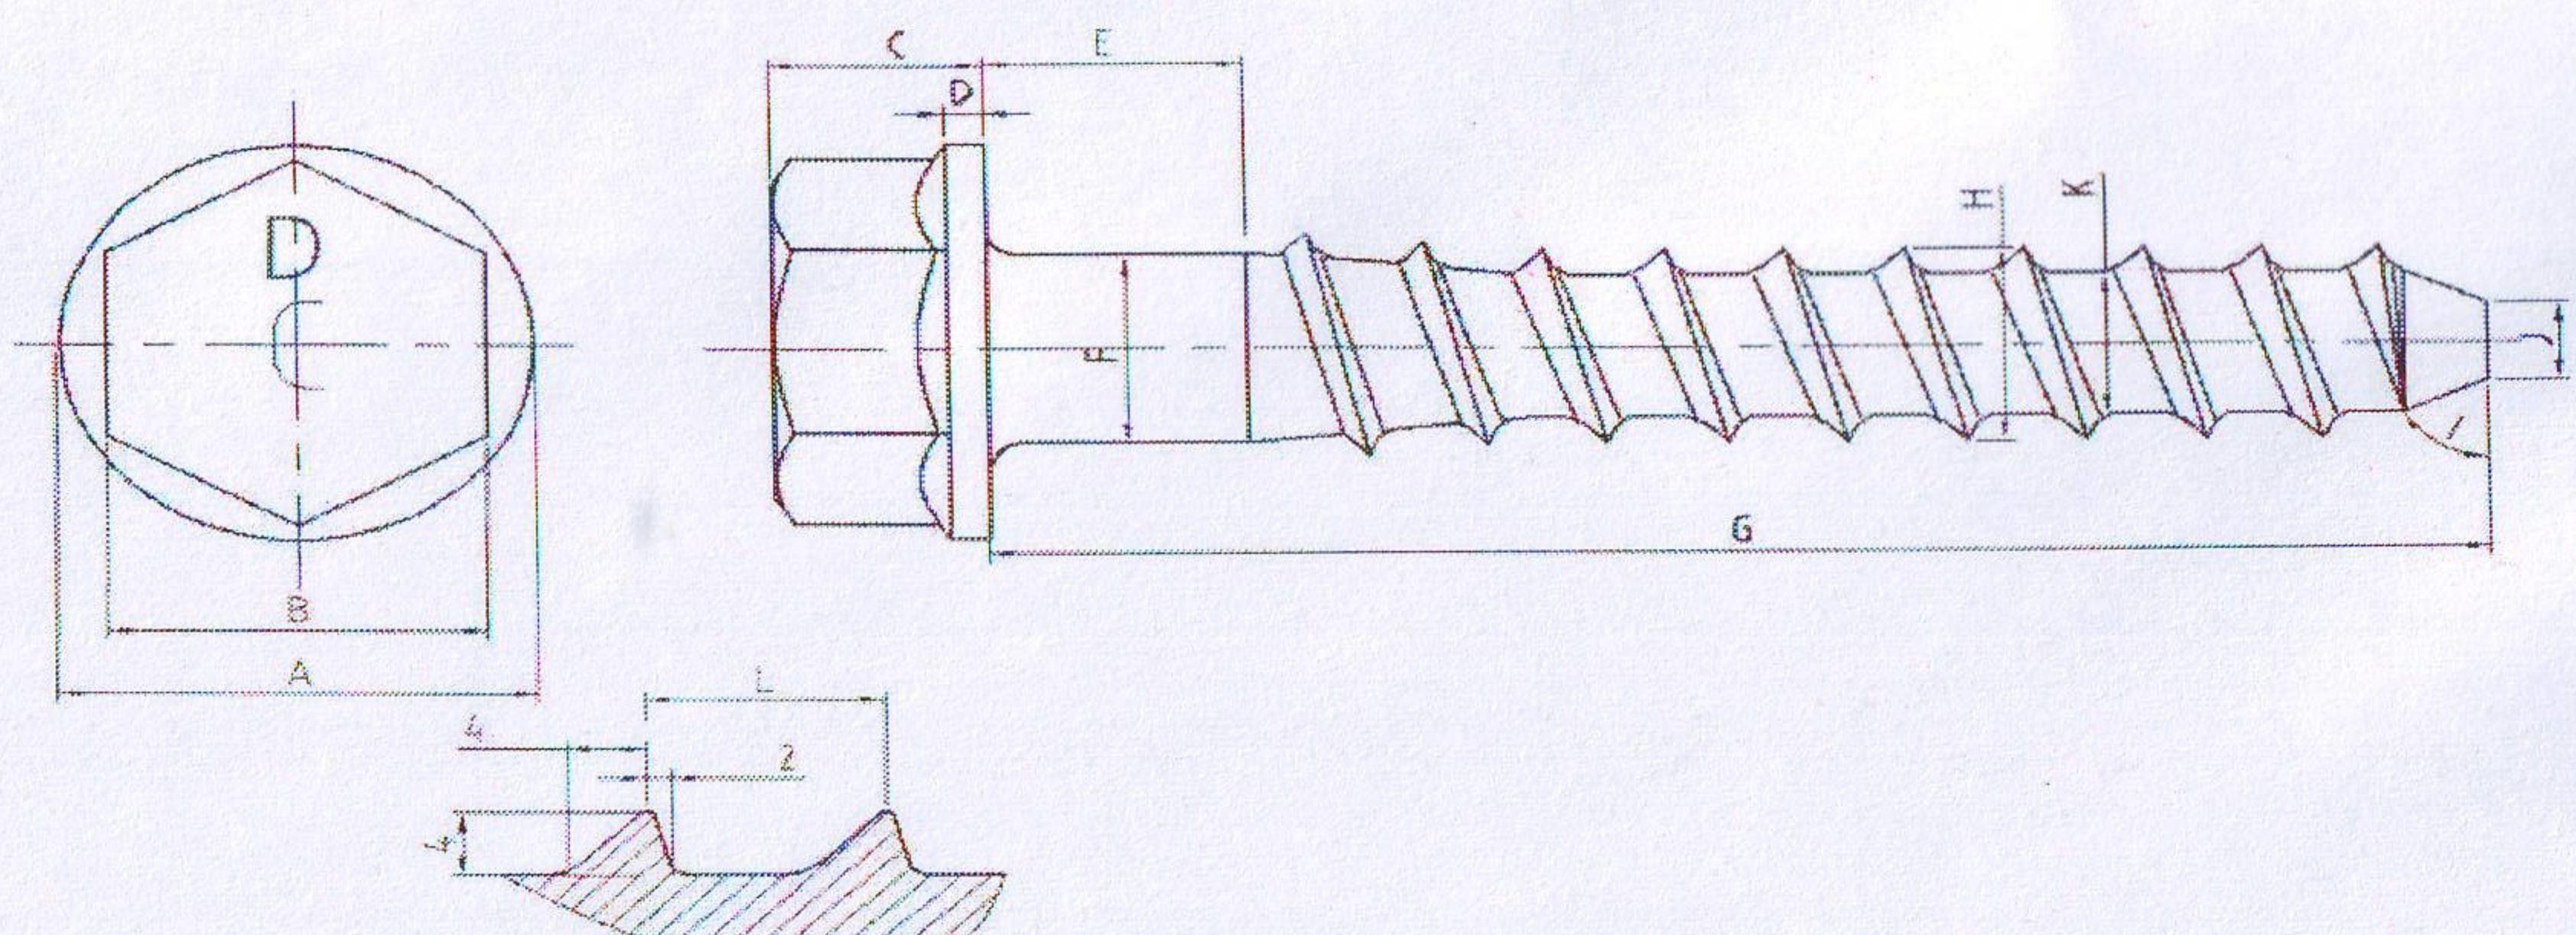

Heat No.	Chemical Composition					Mechanical Properties			Dimension												Coating (hot dipgalv anise) Result		
	C%	Si%	Mn%	P%	S%	Tensile Strength N/mm ²	Yield Point N/mm ²	Elong ation %	A	B	C	D	E	F	G	H	I	J	K	L			
	0.42~ 0.50	0.17~ 0.37	0.50~ 0.80	≤ 0.035	≤ 0.035	≥830	≥660	≥12	Φ 48.2~ 50	40~41	22~23	3.75~ 4.25	33~37	Φ 25~26	187~ 193	Φ 23.5~ 24.5	60°	Φ10	Φ 15.5~ 16.5	12.0~ 13.0			
																					≥55 μm		
B26020174	0.46	0.26	0.62	0.023	0.004	906	715	15	49.2	40.3	22.2	3.9	36.5	25.2	191.4	24.0	ok	10.2	16.1	12.5	75	Pass	
	0.46	0.26	0.62	0.023	0.004	911	731	14	49.3	40.2	22.4	4.0	36.1	25.3	192.1	23.9	ok	10.5	16.0	12.4	87	Pass	
	0.46	0.26	0.62	0.023	0.004	926	702	14	49.2	40.4	22.3	4.0	35.3	25.3	190.3	23.9	ok	10.4	16.0	12.5	96	Pass	
	0.46	0.26	0.62	0.023	0.004	935	722	14	49.3	40.2	22.2	3.9	35.3	25.3	191.8	24.1	ok	10.3	16.2	12.6	71	Pass	
	0.46	0.26	0.62	0.023	0.004	897	692	16	49.1	40.3	22.3	4.1	36.0	25.4	189.2	24.1	ok	10.5	16.2	12.5	82	Pass	
																							

We hereby certify, that the material described above has been tested and complies with the terms of the order contract.

Inspector:Zhang-QuanHui

Checking:Yang-LiCheng



浙江元立金属制品集团有限公司

ZHEJIANG YUANLI METAL PRODUCT GROUP CO., LTD

产品质量证明书

Product Quality Certificate

浙江. 遂昌. 上江工业园区

ADD: NO. 181 YUANLI ROAD, MIAOGAO STREET, SUICHANG, LISHUI, ZHEJIANG

TEL: 18157815951

邮编: 323300

FAX: (0578)8195050

POST CODE:323300

皖CG1827

订货单位 Purchaser	上海元钒实业有限公司	Steel 钢号 Grade	45#-XZ	出库单号 Delivery NO.	260303080
产品名称 Product Name	热轧无扭控冷盘条	总重量(t) Total WEIGHT	26.440	质证书号 Certification	11083908-2
执行标准 Standard	GB/T699-2015	交货状态 Delivery Condition	热轧	签发日期 Date of Delivery	2026-03-03

序号	炉批号 Heet NO.	规格 (mm) SIZE	件数 QTY	钢号 Steel Grade	化学成份 Chemical Composition %															低倍组织（级）			离淬火端硬 度值(HRC)	
					C	Si	Mn	P	S	Cr	Ni	Mo	Cu	Al	Ti	V	B	W	Zr	一般 疏松	中心 疏松	偏析	9mm	15mm
1	B26020173	Φ26	1	45#-XZ	0.46	0.23	0.57	0.017	0.007	0.067	0.013	0.004	0.033	0.008	0.001	0.002	0.0001	0.0000	0.0003					
2	B26020174	Φ26	11	45#-XZ	0.46	0.26	0.62	0.023	0.004	0.054	0.015	0.006	0.029	0.010	0.002	0.004	0.0004	0.0000	0.0012					
3																								
4																								
5																								
6																								
7																								

序号	物理性能Physical Capability						顶锻 Upsetting		显微组织 Microstructure		带状 组织 (级)	碳化物（级）			非金属夹杂物(级)Non Metallic inclusion								冷弯 180°	备注
															A类		B类		C类		D类			
	Rel/Rp0.2 (Mpa)	Rm (Mpa)	A (%)	Z (%)	Akv (J)	热轧 硬度 (HRB)	热 1/3		晶粒度 (级)	脱碳层 (mm)		网状	带状	液析	粗系	细系	粗系	细系	粗系	细系	粗系	细系		
1	389	678	21.0	43		95	合格		9.0	0.130					1.0				1.0					
2	380	679	21.0	44		95	合格		9.0	0.130					1.0						1.0			
3																								
4																								
5																								
6																								
7																								

总计[Total] 12 件

说明	1.材料的表面质量和外形尺寸均合格,酸浸低倍组织中白点、宏观夹杂等标准规定不允许有的缺陷,均保证符合标准出厂.Dimensions and surfaces are qualified. No defect in the macrostructure of steels. Hereby certify that all is in accordance with relevant standard. 2.有异议时,来函请标明钢号、炉号、规格、发货单号、原因,提供质量证明书,并将实物保管好.If there is any objection,please provide,Steel grade,Heet NO,dimension,Delivery NO.,reasons and quality certificate. Please keep the products original. 3.建议按生产日期15天后使用 Please use after 15 days of the production date.	 印章SEAL 吴淑君	签证人VISA: 吴淑君
----	---	-------------------	-----------------