
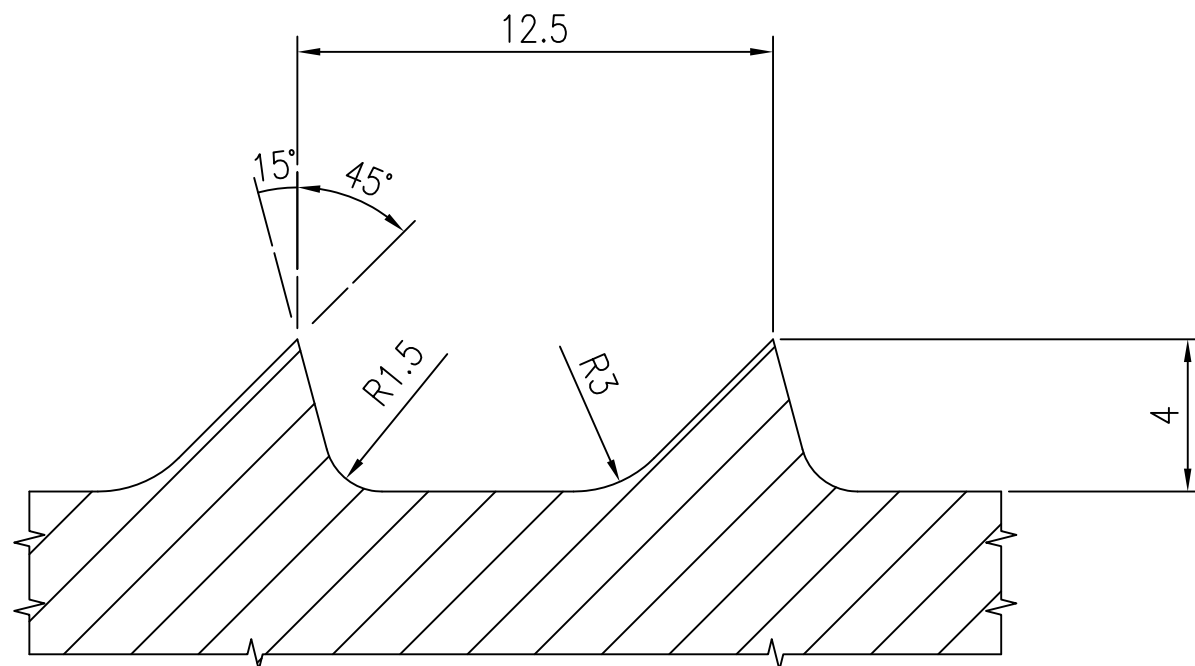
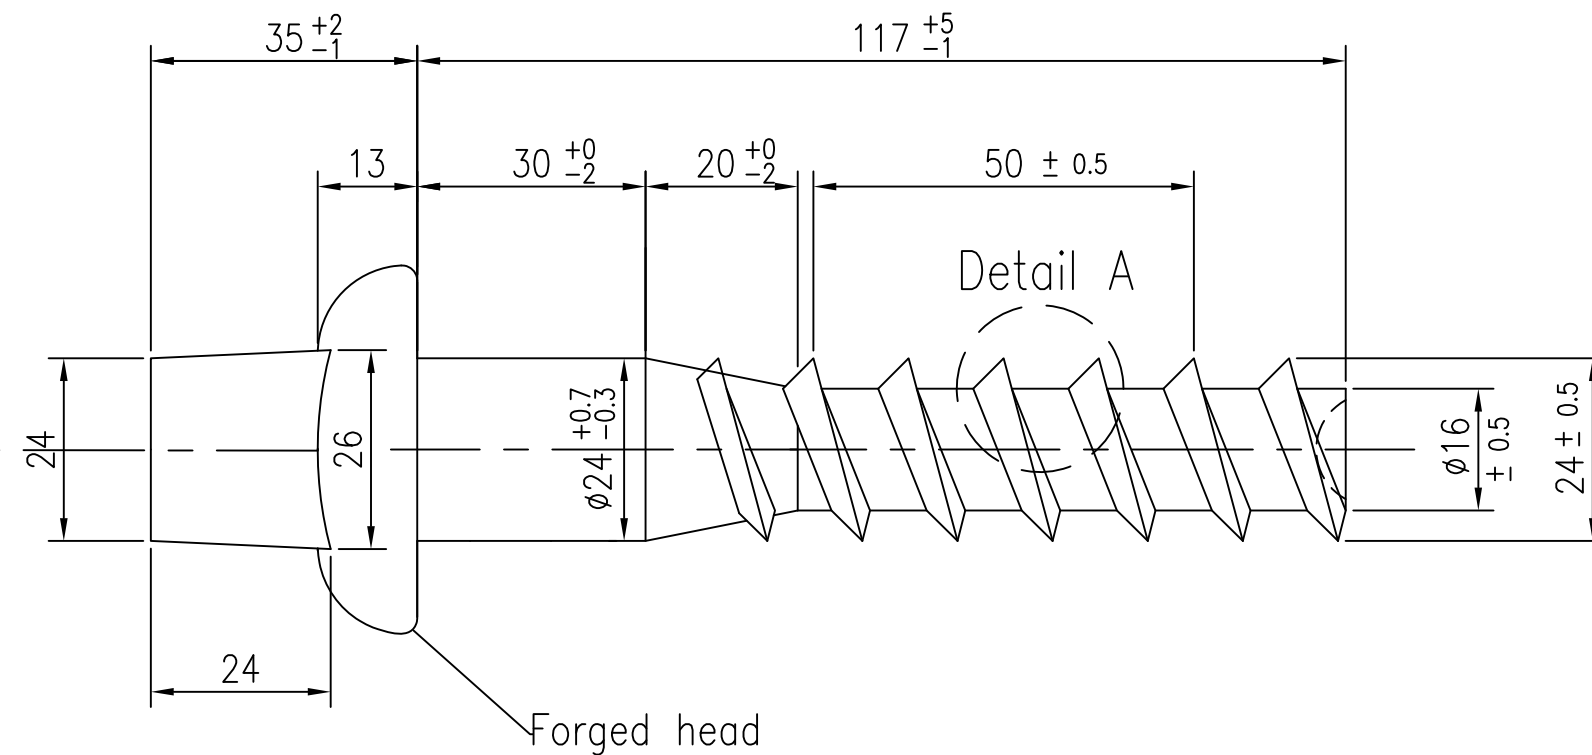


Circle & symbol
Raised 0.75mm

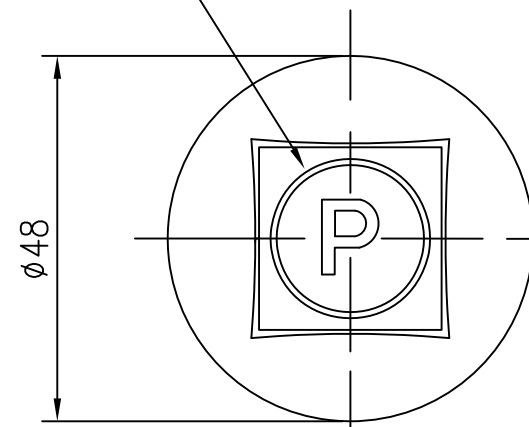

Detail A

Material : M.S Grade 5.6

Notes.

Hot dipped galvanising : to AS 1214 – Current Edition (or DIN 50 976)

Manufactured to the requirements of German Federal Railways

Specification TL91824 and UIC Standard 864-IV

This Screwspike is used in conjunction with 90mm nylon insert (Available from DELKOR)

BREAK ALL SHARP EDGES AND CORNERS 0.5 MAX.



DELKOR RAIL PTY LIMITED
SYDNEY

SCREWSPIKE – 122 LONG

DRAWN	R.T.	JAN '14
CHECKED	P.S.	JAN '14
APPROVED	P.S.	JAN '14

SCALE
1 : 1

DRG. NO.

HSR 602E

REV.



THIS DRAWING AND THE COPYRIGHT THEREIN IS THE PROPERTY OF DELKOR RAIL PTY LIMITED. IT MAY NOT BE COPIED WHOLLY OR IN PART AND IT MAY NOT BE LOANED OR DISCLOSED TO OTHERS WITHOUT THE PRIOR WRITTEN CONSENT OF DELKOR RAIL PTY LIMITED. ALL SUCH AUTHORISED COPIES MUST BEAR THIS NOTICE. THIS DRAWING MUST BE RETURNED AS SOON AS THE PURPOSE FOR WHICH IT WAS MADE AVAILABLE HAS BEEN SERVED.