


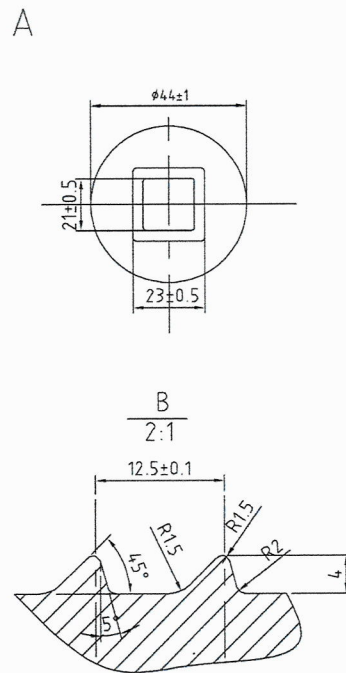

1. Material: 35K
2. Class 5.6
 - Tensile strength ≥ 500 MPa
 - Yield strength ≥ 500 MPa
 - Elongating $\geq 20\%$
3. Coating : HDG $\geq 45 \mu\text{m}$
 - HDG average = $50 \mu\text{m}$
4. Weight: 556 g

Rev.	Date	Modifications		Viso										
ALL LENGHT GIVEN AFTER TREATMENT														
SURFACE ROUGHNESS FOR EACH MACHINING ✓ EXCEPT OTHER PRECISION ON DRAWING														
 RAILTECH-ALU-SINGEN 119, Avenue Louis Roche - B.P. 152 92231 GENNEVILLIERS CEDEX - FRANCE Tel. : 33 (0)1 46 88 17 23 - Fax : 33 (0)1 46 88 17 40			REPLACE:											
			Tolerances	Rev of modification <table border="1" style="width:100%; height:100%;"> <tbody> <tr><td></td><td></td></tr> <tr><td></td><td></td></tr> <tr><td></td><td></td></tr> <tr><td></td><td></td></tr> <tr><td></td><td></td></tr> </tbody> </table>										
Material														
Surface Treatment														
Designed 29.03.2023 by K.Meskine														
Set :			Checked by S.Dufiot											
Designation :			Approved by S.Sulaiman											
SCREW SPIKE 24-142			 Scale : 1 / 1	1432116 A3										