



DETAIL Scale: 3

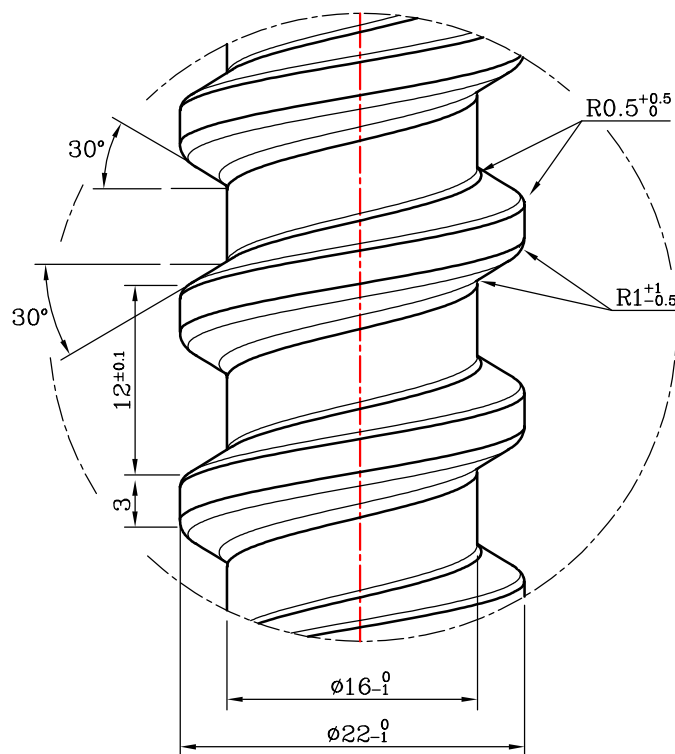

SEE TYPES OF HEADS
(Drawing E225/235f)

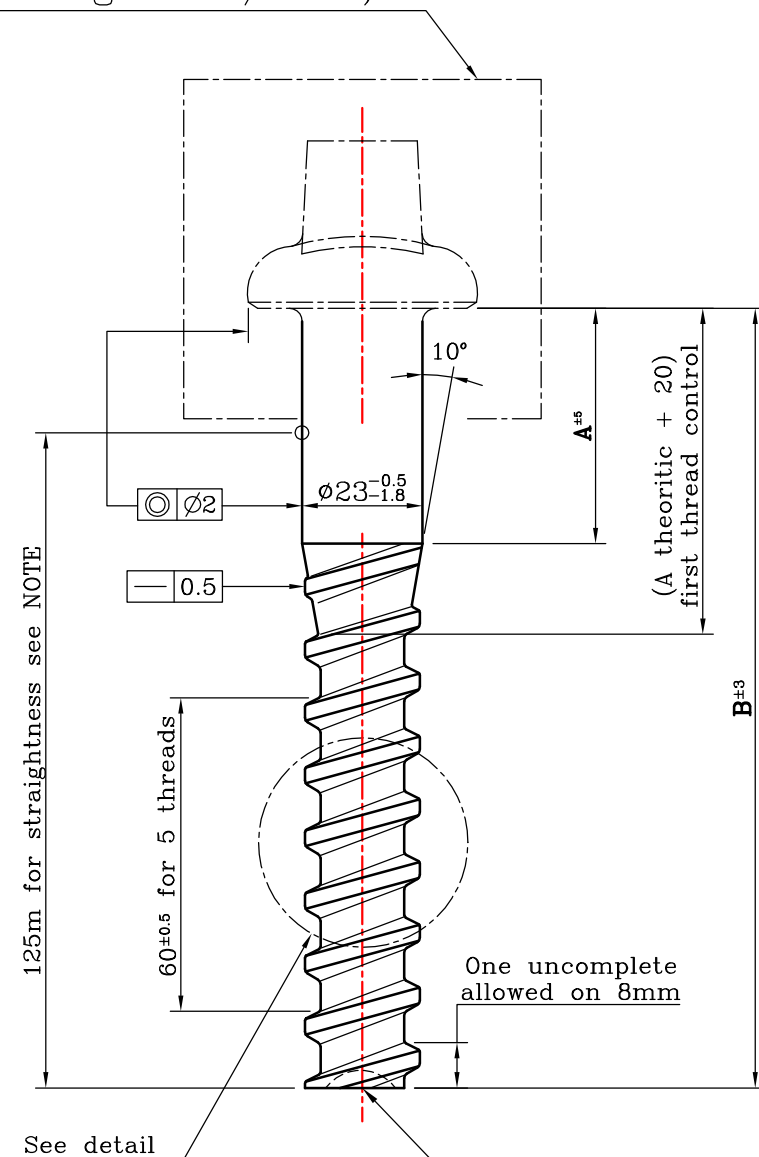

One uncomplete
allowed on 8mm

Coachscrew designation

Head type

N°

Recess :
allowed Maxi 8mm

Manufacturer
brand name

The last two figures of year
of manufacture

Steel class

Marks on head crown : height 4 to 6mm, raised characters
NF F 00-004

Marks on head (steel class): height 8mm
In case of lack of space put P instead of Pandrol

NOTA:

- Inspection according to U.I.C. 864-1-0:
- Bending test at 15°: §1.6.1 and §2.3.3.2.2.
- Straightness to be checked with gauge:
tube inside Ø 22.5 (0,+0.05), lenght: 125mm.
- Steel class: to be specified at order.

N°	A±5	B±3	Theoretical volume (cm3)
1	25	129	56.4
2	30	134	58.4
3	35	139	60.5
4	40	144	62.6
5	45	149	64.7
6	50	154	66.7
7	55	159	68.8
8	60	164	70.9
9	65	169	73
10	70	174	75.1
11	75	179	77.1
12	80	184	79.2
13	85	189	81.3
14	90	194	83.4
15	95	199	85.4
16	100	204	87.5
17	105	209	89.6
18	110	214	91.7

Designation: GS coachscrew – Head Type – Screw N°
Exemple: coachcrew "GS54-B5", class 8.8

GS54 COACHSCREW Ø22

Material:
See norm.

Weight:
/

Technical specifications:
UIC 864-1-0

PANDROL

Track Fastening Systems
Etablissement de DOUAI
205, rue de St-Je Nobile - BP 201
59504 Douai Cedex-FRANCE
Tel: +33(0)3 27 65 64 00 - Fax: +33(0)3 27 99 93 99
management@railtech.fr - www.railtech.fr

This document belongs exclusively to RAILTECH
INTERNATIONAL and cannot be reproduced or diffused
without it's written agreement.

Drawn: Q.Wroblak
Date: 06/05/2020

Scale: 1/1
Size: A2

Modifications:
Added of the theoriactal volume

Checked &
Approved:

N° Drawing:
E225/054

Revision:
AD.1