



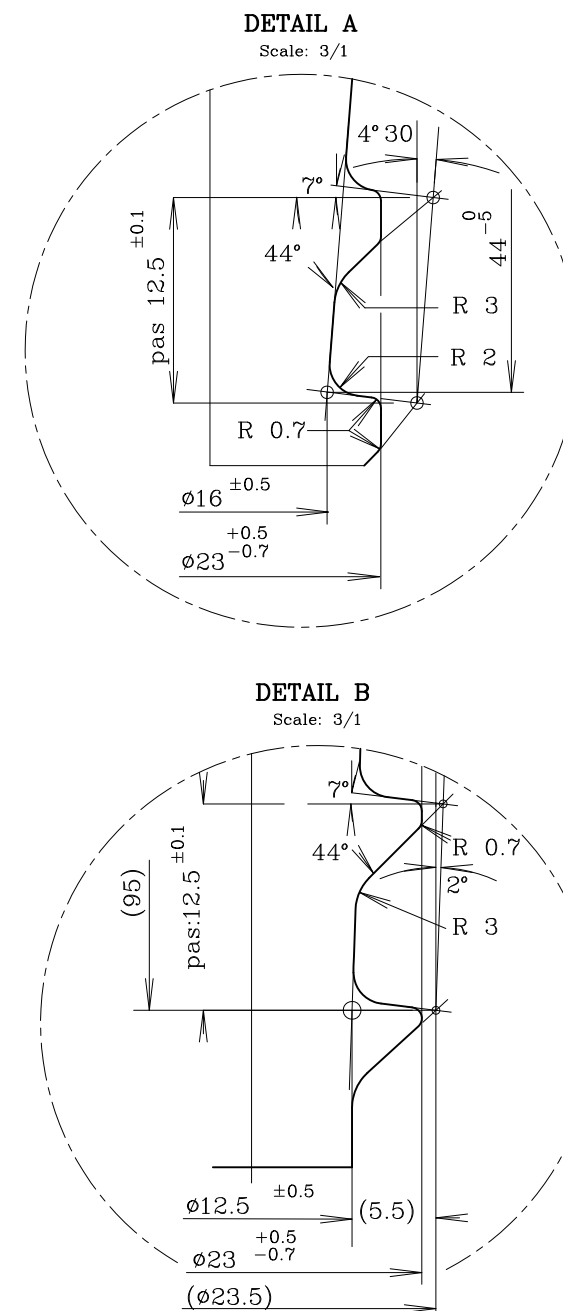

N° of coachscrew N°	Total lenght under head L	Lenght of threadless collar B	Lenght of cylindrical thread C	Weight approx. kg	Old reference STEDEF
1*	115	10	10	0.50	E225/21
2	120	15			
3	125	10	20	0.52	E225/32
4		20	10	0.52	E225/39
5	130	15	20		
6		25	10	0.56	E225/34
7	135	10	30		
8		20	20		E225/44
9*		30	10	0.55	E225/22
10	140	15	30		
11		25	20		E225/42
12		35	10		
13	145	10	40	0.55	E225/26
14		20	30		
15		30	20		E225/36
16	150	40	10	0.62	E225/41
17		15	40		
18		25	30		
19		35	20		
20		45	10	0.62	E225/35
21	155	20	40		
22		30	30	0.59	E225/27
23		40	20	0.63	E225/24
24*	160	50	10	0.61	
25		25	40		
26		35	30		
27	165	45	20		
28		30	40	0.67	E225/25
29		40	30	0.62	E225/33
30		50	20		E225/40
31*	170	60	10	0.63	
32		35	40		
33		45	30		
34	175	40	40	0.63	E225/37
35		50	30		
36	180	45			
37	185	50	40	0.76	E225/29
38		60	30		
39*	215	110	10	0.8	
40*	255	150		0.93	

- Unless otherwise stated in the order:
Hot galvanization protection
NF EN ISO 1461, thickness $\geq 29 \mu\text{m}$.
- Number bearing an asterisk (*) refer to the standard NF F 50-006 (see marks).
- Marks according to Norm: NF F 00-004.

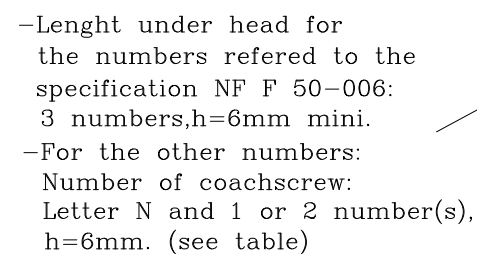

VARIABLE THREAD COACHSCREW Ø23			
Material: Steel see NOTA	Weight: See table	Technical specifications: Notified at the order	
		Track Fastening Systems <i>Etablissement de DOULI</i> 205, rue de Stn le Noble - BP 261 95504 DOULI Coudy-VALANCE Tél. +33(0)3 27 65 64 00 - Fax +33(0)3 27 99 93 99 management@railtech.fr - www.railtech.fr	
		This document belongs exclusively to RAILTECH INTERNATIONAL and cannot be reproduced or diffused without it's written agreement.	
		Drawn: B. HENOCQ Date: 28/01/2004	Scale: 1/1 Size: A2
		Modifications: Changed NF A 91-121 by NF EN ISO 1461	
		N° Drawing: E225/23FV	Revision: J