



SEE TYPES OF HEADS
(Drawing E225/235f)

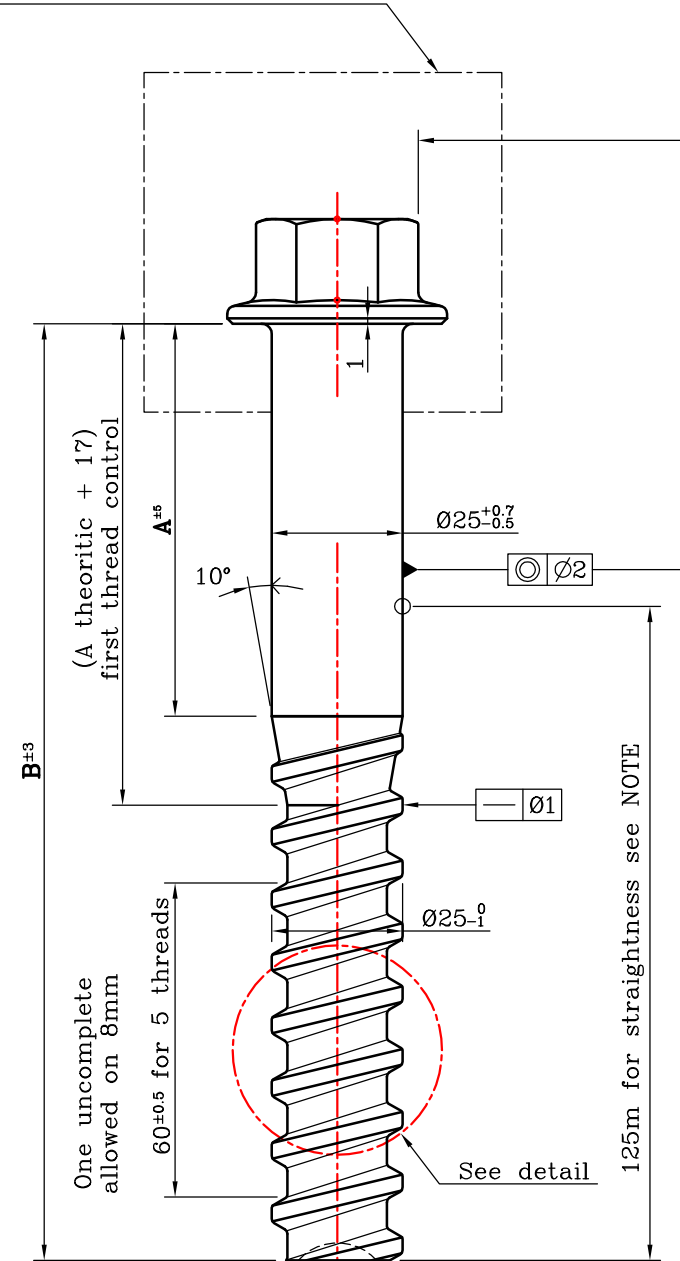

DETAIL Scale: 3

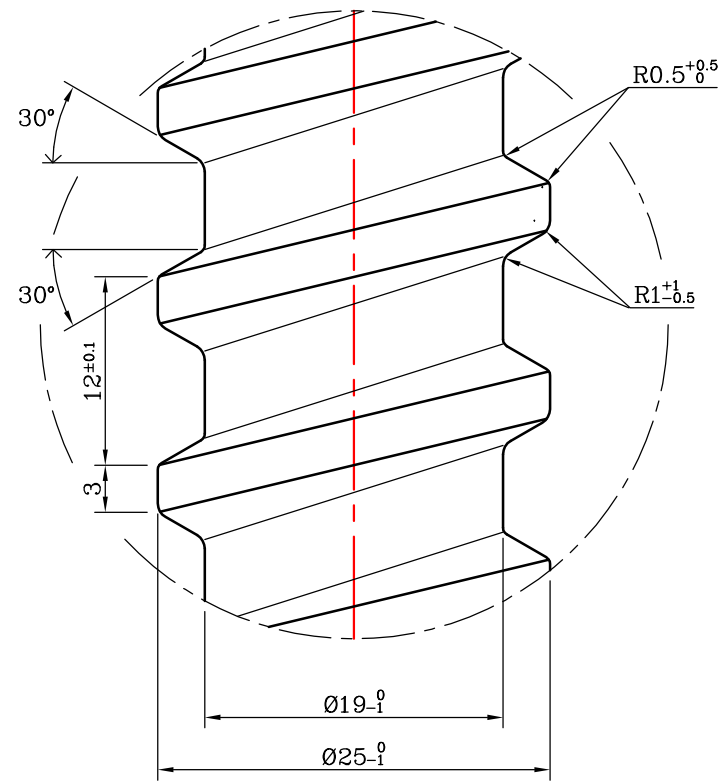

NOTA:

- Inspection according to U.I.C. 864-1-0:
- Bending test at 15°: §1.6.1 and §2.3.3.2.2.
- Straightness to be checked with gauge: tube inside $\varnothing 25.7$ (0,+0.05), length: 125mm.
- Steel class: to be specified at order.

N°	A±5	B±3	Theoretical volume (cm3)
1	25	129	67.6
2	30	134	70.1
3	35	139	72.5
4	40	144	75.0
5	45	149	77.4
6	50	154	79.9
7	55	159	82.3
8	60	164	84.8
9	65	169	87.2
10	70	174	89.7
11	75	179	92.2
12	80	184	94.6
13	85	189	97.1
14	90	194	99.5
15	95	199	101.9
16	100	204	104.4
17	105	209	106.9
18	110	214	109.3
19	115	219	111.8
20	120	224	114.3
21	125	229	116.7
22	130	234	119.2
23	135	239	121.6
24	140	244	124.1

Designation: GS coachscrew – Head Type – Screw N°
Example: coachcrew "GS195-B5", class 8.8

TOUS DROITS RESERVES
ALL RIGHTS RESERVED
BREVETE . PATENTED
REPRODUCTION INTERDITE

Recess :
allowed Maxi 8mm

Manufacturer
brand name

Coachscrew designation

Head type

N°

The last two figures of year
of manufacture

Steel class

Marks on head crown : height 4 to 6mm, raised characters
NF F 00-004

Marks on head (steel class): height 8mm
In case of lack of space put P instead of Pandrol

GS195 COACHSCREW $\varnothing 25$

Material:
See norm.

Weight:
/

Technical specifications:
UIC 864-1-0



PANDROL

Track Fastening Systems
Etablissement de DOUAI
205, rue de St-Je Nobile - BP 201
59504 Douai Cedex-FRANCE
Tel: +33(0)3 27 65 64 00 - Fax: +33(0)3 27 99 93 99
management@railtech.fr - www.railtech.fr

This document belongs exclusively to RAILTECH
INTERNATIONAL and cannot be reproduced or diffused
without it's written agreement.

Drawn: Q.Wroblak
Date: 16/06/2020

Scale: 1/1
Size : A2

Modifications:
Modification of the type
of heads issue

Checked &
Approved:

N° Drawing:
E225/195

Revision:
L.1