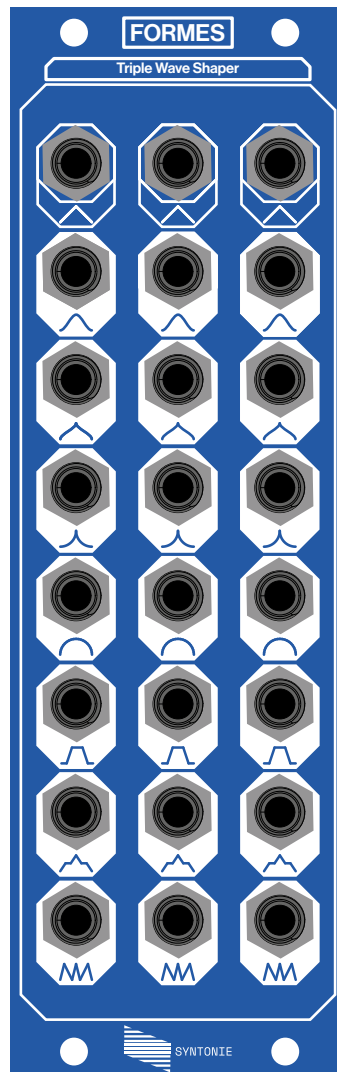

Formes

© syntonie.fr - 2026

Triple Wave Shaper ▸
User documentation



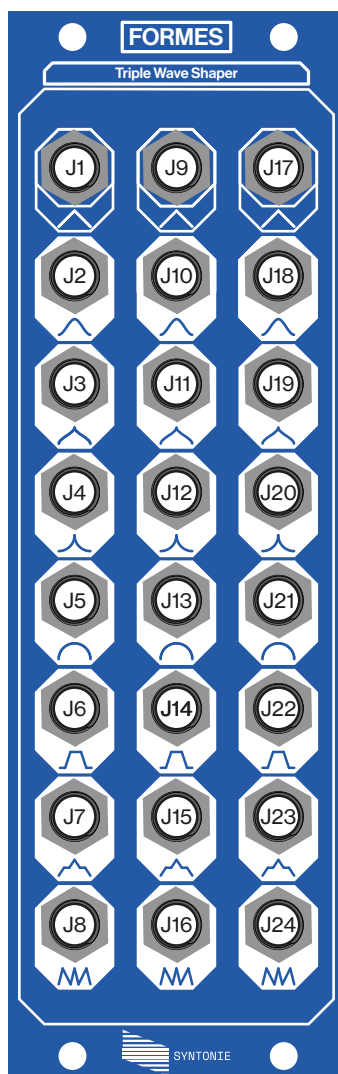
Formes is a triple wave shaper allowing to shape a triangle signal into the following wave forms: sine, antisine, exponential, logarithmic, trapezoid, antitrapezoid and asymmetric folding.

It pairs well with oscillators and ramps, but can also be used on a RGB source for contrast processing.

Specifications

- 8HP
- 175 mA +12V (16pin or DC)
- 0 mA -12V
- 0 mA +5V
- 42mm depth

Special thanks to: Lorenzo Ferronato for the documentation design // And of course, **everyone who has supported Syntonie until now & those who will support it in the future.**



(J1) Channel 1 input : 0-1V, 100k Ω , minijack

(J2) Channel 1 sine output: 0-1V, 75 Ω , minijack

(J3) Channel 1 antisine output: 0-1V, 75 Ω , minijack

(J4) Channel 1 exponential output: 0-1V, 75 Ω , minijack

(J5) Channel 1 logarithmic output: 0-1V, 75 Ω , minijack

(J6) Channel 1 trapezoid output: 0-1V, 75 Ω , minijack

(J7) Channel 1 antitrapezoid output: 0-1V, 75 Ω , minijack

(J8) Channel 1 asymmetric folding output : 0-1V, 75 Ω , minijack

(J9) Channel 2 input : 0-1V, 100k Ω , minijack

(J10) Channel 2 sine output: 0-1V, 75 Ω , minijack

(J11) Channel 2 antisine output: 0-1V, 75 Ω , minijack

(J12) Channel 2 exponential output: 0-1V, 75 Ω , minijack

(J13) Channel 2 logarithmic output: 0-1V, 75 Ω , minijack

(J14) Channel 2 trapezoid output: 0-1V, 75 Ω , minijack

(J15) Channel 2 antitrapezoid output: 0-1V, 75 Ω , minijack

(J16) Channel 2 asymmetric folding output: 0-1V, 75 Ω , minijack

(J17) Channel 3 input : 0-1V, 100k Ω , minijack

(J18) Channel 3 sine output: 0-1V, 75 Ω , minijack

(J19) Channel 3 antisine output: 0-1V, 75 Ω , minijack

(J20) Channel 3 exponential output: 0-1V, 75 Ω , minijack

(J21) Channel 3 logarithmic output: 0-1V, 75 Ω , minijack

(J22) Channel 3 trapezoid output: 0-1V, 75 Ω , minijack

(J23) Channel 3 antitrapezoid output: 0-1V, 75 Ω , minijack

(J24) Channel 3 asymmetric folding output : 0-1V, 75 Ω , minijack

Overview:

Each channel of Formes features the following wave shapers:

- Sine: distorsion/soft clipping of the triangle wave
- Antisine: inverse function of the sine, obtained by subtracting the sine wave to the input triangle wave
- Exponential: multiplication of the triangle wave with itself
- Logarithmic: inverse function of the exponential, obtained by subtracting the exponential wave to the input triangle wave
- Trapezoid: gain + hard clipping of the triangle wave
- Antitrapezoid: inverse function of the trapezoid, obtained by subtracting the trapezoid wave to the input triangle wave
- Asymmetric folding: result of the trapezoid wave subtracted from the antitrapezoid wave

As the front panel suggests, Formes can be used to shape a triangle signal coming from an oscillator (**Ondes**) or a ramp generator (**Rampes**), however, the wave shapers will have an effect on any periodic signals, at the exception of square and pulse wave.

For example, two channels of Formes can be used to process H and V oscillators or ramps, which once combined together, will produce a 2D shape/pattern, with the wave shaper giving control over the visual aspect of the resulting shape/pattern.

Using Formes on a 2D shape or any other complex signal, like an external video source (**Entrée**), will be more akin to gamma correction, allowing to adjust the distribution of the contrast between black and white levels, like compressing or expanding it.

