

Design and Control Strategies for Soft Robotic Systems

Brandon Jonathan Caasenbrood



The work described in this thesis was carried out at the Eindhoven University of Technology.



The research reported in this thesis is part of the research program of the Dutch Institute of Systems and Control (DISC). The author has successfully completed the educational program of the Graduate School DISC.

A catalogue record is available from the Eindhoven University of Technology Library.
ISBN: 123-45-678-9012-3

Typeset by the author using the pdf L^AT_EX documentation system.

Cover design: Name of cover designer

Reproduction: Name of printer || www.printerswebsite.nl

Design and Control Strategies for Soft Robotic Systems

PROEFSCHRIFT

ter verkrijging van de graad van doctor aan de
Technische Universiteit Eindhoven, op gezag van de
rector magnificus prof.dr.ir. F.P.T. Baaijens, voor een
commissie aangewezen door het College voor
Promoties, in het openbaar te verdedigen
op maandag 30 december 2022 om 16:00 uur

door

Brandon Jonathan Caasenbrood

geboren te Jupiter

Dit proefschrift is goedgekeurd door de promotoren en de samenstelling van de promotiecommissie is als volgt:

voorzitter: Name of Chairman

promotor: Name of Promotor

co-promotor: Name of co-Promotor

leden: Name of committee member 1 (Affiliation if not TU/e)

Name of committee member 2 (Affiliation if not TU/e)

Name of committee member 3 (Affiliation if not TU/e)

Name of committee member 4 (Affiliation if not TU/e)

Het onderzoek dat in dit proefschrift wordt beschreven is uitgevoerd in overeenstemming met de TU/e Gedragscode Wetenschapsbeoefening.

Abstract

Design and Control Strategies for Soft Robotic Systems

B.J. Caasenbrood (Brandon) Date: March 14, 2022

In the past two decades, the field of soft robotics has kindled a major interest among many scientific disciplines. Contrary to rigid robots, soft robots explore '*soft materials*' that significantly enhance the robots dexterity, enable a rich family of motion primitives, and enhance environmental robustness regarding contact and impact that benefactors human-robot safety. The main inspiration for soft robotic systems stems from biology with the aim to achieve similar performance and dexterity as biological creatures. Since its inception, soft robotics has exemplified its potential in diverse industrial areas such as safe robotic manipulation, adaptive grasping, aquatic and terrestrial exploration subject to environmental uncertainty, rehabilitation, and the bio-mimicry of many animals including birds, fish, elephants, octopuses, and various invertebrates. By exploring the uncharted merits of soft materials and soft actuation, soft robotics has placed the first steppingstones towards achieving biological performance in next-generation robotics.

Although some significant leaps have been made towards bridging biology and robotics, there exist major scientific challenges that hinder the advancement of the field. In particular: (I) the Design and (II) Modeling of soft robotic systems. Traditional design of rigid robotics emphasizes on maximum structural rigidity and weight minimization, as to allow for fast, repeatable motion with negligible structural flexibility. Soft robotics, on the other hand, primarily rely on minimal structural rigidity for motion – so-called '*hyper-flexibility*'. Furthermore, as soft materials undergo large nonlinear mechanical responses paired with distributed actuation, expressing the robot's workspace often leads to highly nonlinear kinematic descriptions. Using traditional engineering principles for soft materials is perhaps outdated and computer-assisted design principles for soft robotics might mandate the next steps for the field, especially with the recent advances in Additive Manufacturing (AM). As for modeling, its innate infinite-dimensionality poses fundamental problems for model-based controllers. An important question arises during the modeling of such soft robots; '*how to deal with the trade-off between accuracy and computational efficiency?*'. Besides, the presence of soft materials imbue the system with nonlinear mechanical responses that are perhaps alien to standard robot modeling. As a result, in terms of closed-loop performance, soft robots nowadays are easily outclassed by their rigid counterparts due to a lack of modeling knowledge. The diligence of achieving similar precision and speed to current state-of-the-art robots, and ultimately nature, stresses the paramount importance on design, modeling, and control tailored for soft robotics.

This thesis will address the generative design strategies for soft robots as well as model-based control strategies for a subclass – soft continuum manipulators.

In the first part of this thesis, we present a novel framework for synthesizing the design of soft robotics with various types of soft actuation, *e.g.*, tendons, hydraulics, and pneumatics. Contrary to traditional design, such as bio-mimicry, a gradient-based topology optimization is explored to find sub-optimal soft robotic morphologies that satisfy user-defined motion criteria. Two difficulties are addressed here. First, pressure-based topology optimization yields distributed adaptive loadings that changes at each optimization step; and second capturing the hyper-elastic nature of soft materials. A Finite Element Method (FEM) solver is proposed such that the physics under large nonlinear deformations of hyper-elastic materials and pneumatic actuation are accurately preserved. The optimization-driven algorithm yields generative designs for a diverse set of soft morphologies: soft rotational actuators, soft artificial muscles, and soft grippers. By assembly of smaller soft sub-components, a full soft robot can be developed and through AM of flexible materials the feasibility is validated.

The second part of the thesis will focus on the model-based control of soft continuum manipulators, where the emphasis lies on the efficiency and accuracy in low-dimensional models. The continuous dynamics of the soft robot are modeled through the differential geometry of spatial curves. Using a finite-dimensional truncation, the system can be written as a reduced port-Hamiltonian model that preserves desirable control condition, *e.g.*, passivity. However, this modeling techniques introduces gaps between the underlying material mechanics and control-structured dynamic model. Since useful information is attainable through FEM a-priori, new system identification tools are proposed that give insight into the dominant dynamic modes, the hyper-elasticity, and the reachable workspace spanned by soft materials and actuation. The approach yields accurate low-dimensional models with real-time control capabilities but also gives physical insight into optimal sensor placement applicable to proprioceptive sensing.

Following, the thesis treats the development of model-based controllers that can be employed in various control scenarios, *e.g.*, motion planning, set-point stabilization, tracking, and grasping; akin to rigid robotics. The stabilizing controller utilizes an energy-based formulation, providing robustness even when faced with material uncertainties. The controller's effectiveness is demonstrated in simulation for various soft robotic systems that share a close resemblance to biology.

Lastly, the thesis will implement the proposed computationally efficient systematic strategies for the design and control on physical soft robotic systems, including soft grippers, soft manipulators, and soft exoskeletons. As a concluding remark, this thesis contains several new techniques for design and model-based control of the increasingly fast evolving and multi-disciplinary field of soft robotics.

Keywords: Soft Robots, Flexible Robots, Design Optimization, Continuum Mechanics, Reduced-order Modeling, Model-based Control, Additive Manufacturing.

Samenvatting

IN DUTCH: Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc

elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

Trefwoorden: Trefwoord 1, Trefwoord 2, Trefwoord 3, ...

Societal summary

IN ENGLISH: Fusce mauris. Vestibulum luctus nibh at lectus. Sed bibendum, nulla a faucibus semper, leo velit ultricies tellus, ac venenatis arcu wisi vel nisl. Vestibulum diam. Aliquam pellentesque, augue quis sagittis posuere, turpis lacus congue quam, in hendrerit risus eros eget felis. Maecenas eget erat in sapien mattis porttitor. Vestibulum porttitor. Nulla facilisi. Sed a turpis eu lacus commodo facilisis. Morbi fringilla, wisi in dignissim interdum, justo lectus sagittis dui, et vehicula libero dui cursus dui. Mauris tempor ligula sed lacus. Duis cursus enim ut augue. Cras ac magna. Cras nulla. Nulla egestas. Curabitur a leo. Quisque egestas wisi eget nunc. Nam feugiat lacus vel est. Curabitur consectetur.

Suspendisse vel felis. Ut lorem lorem, interdum eu, tincidunt sit amet, laoreet vitae, arcu. Aenean faucibus pede eu ante. Praesent enim elit, rutrum at, molestie non, nonummy vel, nisl. Ut lectus eros, malesuada sit amet, fermentum eu, sodales cursus, magna. Donec eu purus. Quisque vehicula, urna sed ultricies auctor, pede lorem egestas dui, et convallis elit erat sed nulla. Donec luctus. Curabitur et nunc. Aliquam dolor odio, commodo pretium, ultricies non, pharetra in, velit. Integer arcu est, nonummy in, fermentum faucibus, egestas vel, odio.

Sed commodo posuere pede. Mauris ut est. Ut quis purus. Sed ac odio. Sed vehicula hendrerit sem. Duis non odio. Morbi ut dui. Sed accumsan risus eget odio. In hac habitasse platea dictumst. Pellentesque non elit. Fusce sed justo eu urna porta tincidunt. Mauris felis odio, sollicitudin sed, volutpat a, ornare ac, erat. Morbi quis dolor. Donec pellentesque, erat ac sagittis semper, nunc dui lobortis purus, quis congue purus metus ultricies tellus. Proin et quam. Class aptent taciti sociosqu ad litora torquent per conubia nostra, per inceptos hymenaeos. Praesent sapien turpis, fermentum vel, eleifend faucibus, vehicula eu, lacus.

Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Donec odio elit, dictum in, hendrerit sit amet, egestas sed, leo. Praesent feugiat sapien aliquet odio. Integer vitae justo. Aliquam vestibulum fringilla lorem. Sed neque lectus, consectetur at, consectetur sed, eleifend ac, lectus. Nulla facilisi. Pellentesque eget lectus. Proin eu metus. Sed porttitor. In hac habitasse platea dictumst. Suspendisse eu lectus. Ut mi mi, lacinia sit amet, placerat et, mollis vitae, dui. Sed ante tellus, tristique ut, iaculis eu, malesuada

ac, dui. Mauris nibh leo, facilisis non, adipiscing quis, ultrices a, dui.

Morbi luctus, wisi viverra faucibus pretium, nibh est placerat odio, nec commodo wisi enim eget quam. Quisque libero justo, consectetur a, feugiat vitae, porttitor eu, libero. Suspendisse sed mauris vitae elit sollicitudin malesuada. Maecenas ultricies eros sit amet ante. Ut venenatis velit. Maecenas sed mi eget dui varius euismod. Phasellus aliquet volutpat odio. Vestibulum ante ipsum primis in faucibus orci luctus et ultrices posuere cubilia Curae; Pellentesque sit amet pede ac sem eleifend consectetur. Nullam elementum, urna vel imperdiet sodales, elit ipsum pharetra ligula, ac pretium ante justo a nulla. Curabitur tristique arcu eu metus. Vestibulum lectus. Proin mauris. Proin eu nunc eu urna hendrerit faucibus. Aliquam auctor, pede consequat laoreet varius, eros tellus scelerisque quam, pellentesque hendrerit ipsum dolor sed augue. Nulla nec lacus.

Contents

Abstract	v
Samenvatting	vii
Societal summary	ix
1 Introduction	1
1.1 The Origin of Soft Robotics	1
1.2 Modern Soft Robotics	4
List of publications	5

1

Introduction

1.1 The Origin of Soft Robotics

The term '*soft robotics*' is the abbreviated form of '*soft material robotics*'. Although the words '*soft*' and '*robotics*' have a clear definitions independently, the collocation of the two has sparked vivid discussions in the robotics community for many years – even touching the territories of the philosophical. Consequently, the exponential scientific interest in soft robotics around 2011 may be seen as a historical cornerstone that has revolutionized our perspective on the branching field of robotics and rekindled its original ambition even before the term '*robot*' was introduced. Although the debate on the exact terminology is still ongoing, and perhaps may never be closed; we propose a definition for '*soft robotics*' applicable to this thesis based on an ensemble of prior literature:

Terminology: *Soft robotics* is a subclass of robotics with purposefully designed compliant elements embedded into their mechanical structure whose goal is to endow the robot with biological motion and/or compliance.

The definition above is mostly adopted from Della Santina et al. [], yet modified to purposefully highlight the importance of soft materials to mimic biological motion – also referred to as '*bio-mimicry*'. The ambition of closely mimicking biological creatures is perhaps not often associated with the field of robotics in general, yet the inception of robotics can originally be found in bio-mimicry when regarding its rich history. We would like to implore the reader to embark with us this brief section into the history of (soft) robotics, as to show that the current

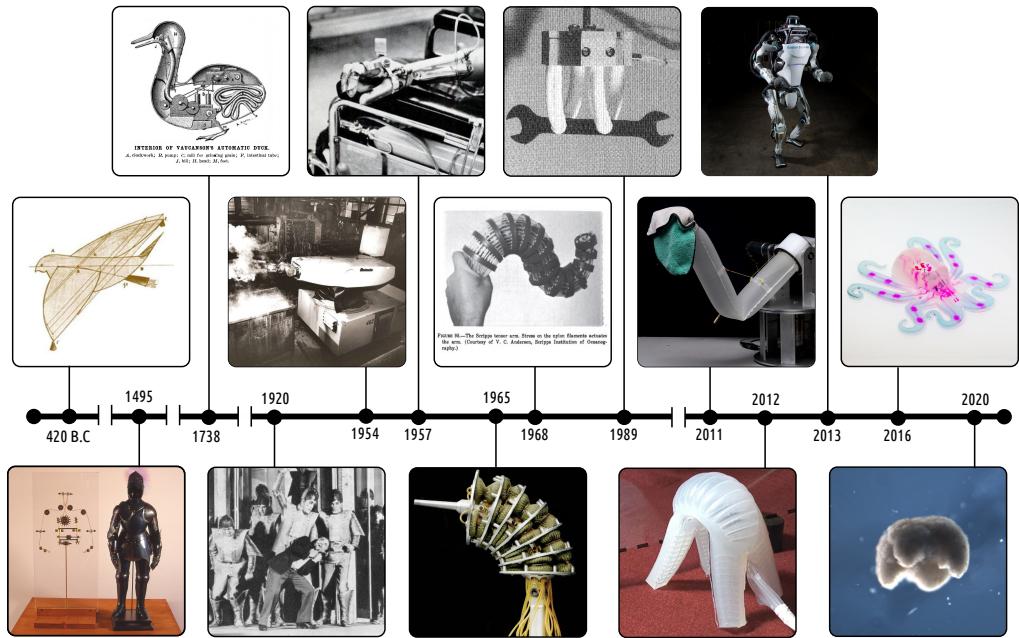


Figure 1.1. A brief timeline of the state-of-the-art of robotics throughout human history. *a)* One of the earliest examples of bio-mimicry – the flying mechanical bird using steam-powered propulsion. *b)* The Mechanical Knight by Leonardo Da Vinci. *c)* A mechanical monk adopted by the designs of Da Vinci. *d)* Digesting duck patent of Jacques de Vaucanson. *e)* The science-fiction play by Karel Čapek on robots, who introduced the word '*robot*' into the Oxford English Dictionary originally from his brother Josef Čapek.

trends of bio-mimicry in robotics finds roots in a period before classic robotics. One of the earliest examples of bio-mimicry is a mechanical wooden dove developed by mathematician Archytas of Tarentum in 350 BC. According to historians, the system was driven by compressed air or an internal steam-driven engine to achieve forward propulsion, capable of flight distances of ± 200 m¹. Archytas's invention could be considered as one of the earliest robotic systems – a machine or device that operates automatically or by remote control – whose main principles are somewhat analogous to nowadays '*drone*' technology. A millennium later, in the period of the High Renaissance, Leonardo da Vinci designed and constructed a mechanical knight around the 1490's. Such mechanical constructions were perhaps closer to conventional rigid robotics given our current robotics perspective.

¹It was unclear if the devices was attached to a rope, or autonomous flight was achieved.

It is well-known that his work was built upon extensive anatomical research, which may have facilitated a deep understanding of the human body into the mechanical knight's robotic design.

In the 1920's, shortly after the second industrial revolution (1870 - 1914) and the first world war (1914), the first usage of the work '*robot*' appeared – originally meaning 'forced labor by serfs' (*i.e.*, peasants) derived from the Czech word '*robota*'. A common misconception is that robot implies slave, although incorrect, its origin is somewhat related. The word was popularized by Karel Čapek in his play R.U.R. (Rossum's Universal Robots) that involves an inventor named Rossum who discovers the secret of creating human-like machines. In his play, Rossum's robots assisted or fully alleviated mankind from any labor. Through human's ambition to assimilate man and machine, the robots ultimately gained the capacity for emotions – including pain. Shortly after, the robots, who were created to serve humans, have come to dominate mankind completely. The word '*robotics*' was later solidified by Isaac Asimov, adapting the term from Čapek. These works of science fiction are perhaps the fundamental groundwork of modern robotics which have led to the base practices of robotics and its corresponding academic field.

Only three decades later, in the 1950's, the first robotic arm called the '*Unimate*' was employed in industry. The robot was used for manipulating die cast and welding these to welding these to the main body of automobiles. Interestingly, the robot explored both electric as hydraulic-mechanical actuation, similar to nowadays popular Atlas robot (2013) by the company Boston Dynamics. Note that these robots were still controlled remotely, and rudimentary levels of closed-loop control were applied then. The 1950's brought forth the McKibben actuators developed by Joseph Laws McKibben. These McKibben actuator consists of an inflatable inner bladder enveloped with a double-helical weave. When pressurized, the fluidic actuator converted radial expansion into uni-axial contraction since weave inhibited extensive '*ballooning*' – a term for undesired radial expansion. The McKibben actuators are perhaps one of the first fundamental technologies that enabled for soft robotics and to this day is the framework for many soft artificial muscle. Although they do not fall under the class soft robot, they are; however, categorized as soft actuators. We like to emphasize here the difference between soft actuators and soft robots in view of the terminology corresponding with the thesis:

Terminology: **Soft actuators** are controllable flexible components of the constitutive soft robotic system that through external stimuli allow for motion or adaptability of compliance and/or texture.

This terminology attempts to address a common ambiguity in the field of soft robotics, being that the term of soft actuators and soft robots are sometimes used interchangeably. In the mid-1950's, the work of ?? designed one of the

soft robotics systems – even before rigid hyper-redundant robotics. The system consisted of three pneumatic soft actuators aligned in parallel to the backbone of the robot.

1.2 Modern Soft Robotics

The first robotic manipulator arm used in the orbital environment was the Space Shuttle remote manipulator system. It was successfully demonstrated in the STS-2 mission in 1981 and is still operational today.

First soft robot: Victor Scheinman and Larry Leifer developed an air-powered robot arm called Orm, which is the Norwegian word for snake.

- . F. Shulte, "The Characteristics of the Mckibben Artificial Muscle", The Application of External Power in Prosthetics and Orthotics, pp. 94-115, 1960.
- A. Chen, R. Yin, L. Cao, C. Yuan, H. K. Ding and W. J. Zhang, "Soft robotics: Definition and research issues," 2017 24th International Conference on Mechatronics and Machine Vision in Practice (M2VIP), 2017, pp. 366-370, doi: 10.1109/M2VIP.2017.8267170.

Preliminary titles, committee members, and list of publications

Preliminary titles

1. A Control-oriented Perspective on Design and Modeling of Soft Robotic Systems;
2. Towards a Unified Framework for Design and Model-based Control of Soft Robots;
3. Addressing the Open Challenges in Soft Robotics: from Design to Model-based Control
4. Design and Control Strategies for Soft Robotic Systems;
5. Design, Modeling, Simulation and Control of Soft Robots.
6. Design, Modeling and Control Strategies for Soft Robotics Systems;
7. (Soft Manipulators/Soft Robotic Manipulators?)

Preliminary committee members

- prof. J. den Toonder (TU/e, Microsystems, ICMS)
- dr. R. Luttge (TU/e, Microsystems) - Backup for Jaap
-
- prof. G. Krijnen (Twente University) Technologies)
- prof. C.C.L. Wang (Delft University) [1], [2]
- prof R. Carloni (Rijksuniversiteit Groningen) - backup for Gijs
-
- dr. E. Franco (Enrico, Imperial College London) [1], [2]
- prof. H. Mochiyama (University of Tsukuba) [1], [2]
- dr. C. Duriez (INRIA Lille) [1],[2]
- prof. R. Katzschmann (ETH Zurich) [1],[2]
- dr. S. Grazioso (University of Naples) [1]
- dr. M. Bächer (ETH Zurich) [1],[2]
- Antonio Bicchi - Italian

- Annibal Olero - Spain
- Bas Overvelde??

Peer-reviewed journal articles

- B. Caasenbrood, A. Pogromsky and H. Nijmeijer, *Reduced-order Cosserat Models for Soft Robotic Systems using FEM-driven Shape Reconstruction*, Robotics and Automation Letters. (*in preparation for journal submission*);
- B. Caasenbrood, A. Amoozandeh Nobaveh, M. Janssen, A. Pogromsky, J. Herder, and H. Nijmeijer *An Energy-efficient Gravity-balancing Wrist Exoskeleton by exploring Compliant Beams and Soft Robotic Actuation*, Wearable Technologies. (*in preparation for journal submission*);
- A. Amiri, B. Caasenbrood, D. Liu, N. van de Wouw, and I. Lopez Arteaga, "*An Electric Circuit Model for the Nonlinear Dynamics of Electro-active Liquid Crystal Coatings*", Applied Physics Letters, 2022. (*under review*);
- B. Caasenbrood, A. Pogromsky and H. Nijmeijer, *Energy-shaping Controllers for Soft Robot Manipulators through Port-Hamiltonian Cosserat Models*, SN Computer Science Springer, 2022. (*under review*);
- B. Caasenbrood, A. Pogromsky and H. Nijmeijer, "*Control-oriented Models for Hyper-elastic Soft Robots through Differential Geometry of Curves*", Soft Robotics, 2021. (*under review*).

Peer-reviewed articles in conference proceedings

- B. Caasenbrood, F.E. van Beek, H. Khanh Chu, and I.A. Kuling, *A Desktop-sized Platform for Real-time Control Applications of Pneumatic Soft Robots*, IEEE International Conference on Soft Robotics, RoboSoft 2022. (*accepted*)
- A. Amoozandeh Nobaveh, and B. Caasenbrood, "*Design Feasibility of an Energy-efficient Wrist Exoskeleton using Compliant Beams and Soft Actuators*", Proceedings of the 18th International Consortium for Rehabilitation Robotics, 2022 (*accepted*).
- B. Caasenbrood, A. Pogromsky and H. Nijmeijer, "*Energy-based control for Soft Robots using Cosserat-beam models*", Proceedings of the 18th International Conference on Informatics in Control, Automation and Robotics, 2021, pp. 311319.

- B. Caasenbrood, A. Pogromsky and H. Nijmeijer, "*A Computational Design Framework for Pressure-driven Soft Robots through Nonlinear Topology Optimization,*" 2020 3rd IEEE International Conference on Soft Robotics, 2020, pp. 633-638.
- B. Caasenbrood, A. Pogromsky and H. Nijmeijer, *Dynamic modeling of hyper-elastic soft robots using spatial curves*, IFAC World Congress, IFAC-PapersOnLine, 2020, pp. 9238-9243.

Invited Talks and Non Peer-reviewed Abstracts

- B. Caasenbrood, *SOROTOKI: an Open-source Toolkit for Soft Robotics written in MATLAB*, IEEE International Conference on Soft Robotics, RoboSoft 2022 (abstract).
- B. Caasenbrood, C. Della Santina, and A. Pogromsky, *Workshop on Model-based Control of Soft Robots*, European Control Conference (ECC), 2021. (main organizer).
- B. Caasenbrood, talk on *Towards Desing and Control of Soft Robotics*, 4TU Symposium on Soft Robotics, 2020. (invited speaker).
- B. Caasenbrood, talk on *3D-printed Soft Robotics*, Symposium on Robotic Technologies, 2019. (invited speaker).
- B. Caasenbrood, A. Pogromsky and H. Nijmeijer, talk on *Forward Dynamics of Hyper-elastic Soft Robotics*, 39th Benelux Meeting on Systems and Control, 2019. (abstract).
- B. Caasenbrood, A. Pogromsky and H. Nijmeijer, talk on *Dynamical modeling and control of continuum soft robots*, 37th Benelux Meeting on Systems and Control, 2018. (abstract).

