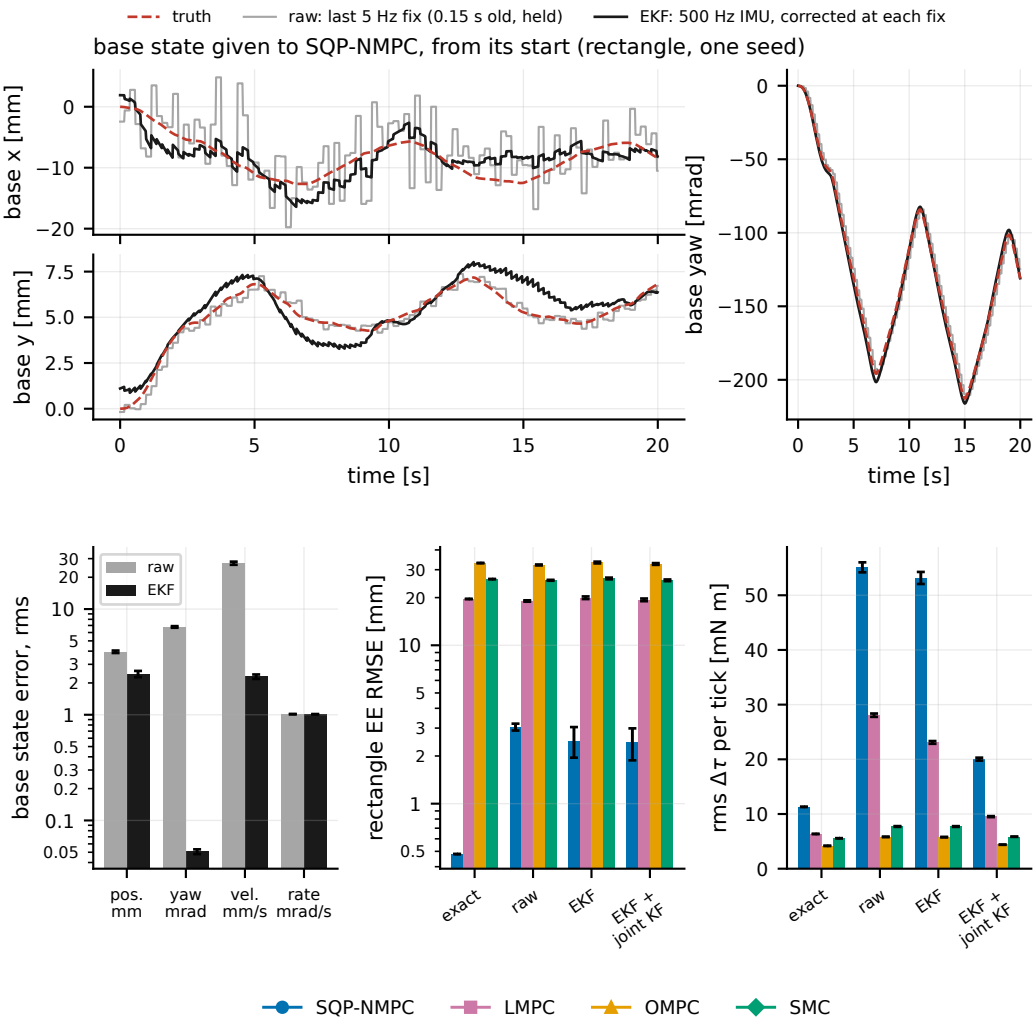
truth
raw: last 5 Hz fix (0.15 s old, held)
EKF: 500 Hz IMU, corrected at each fix
base state given to SQP-NMPC, from its start (rectangle, one seed)
base x [mm]
base y [mm]
base yaw [mrad]
time [s]
time [s]
base state error, rms
raw
EKF
pos. mm
yaw mrad
vel. mm/s
rate mrad/s
rectangle EE RMSE [mm]
exact
raw
EKF
EKF + joint KF
rms Δτ per tick [mN m]
exact
raw
EKF
EKF + joint KF
SQP-NMPC
LMPC
OMPC
SMC