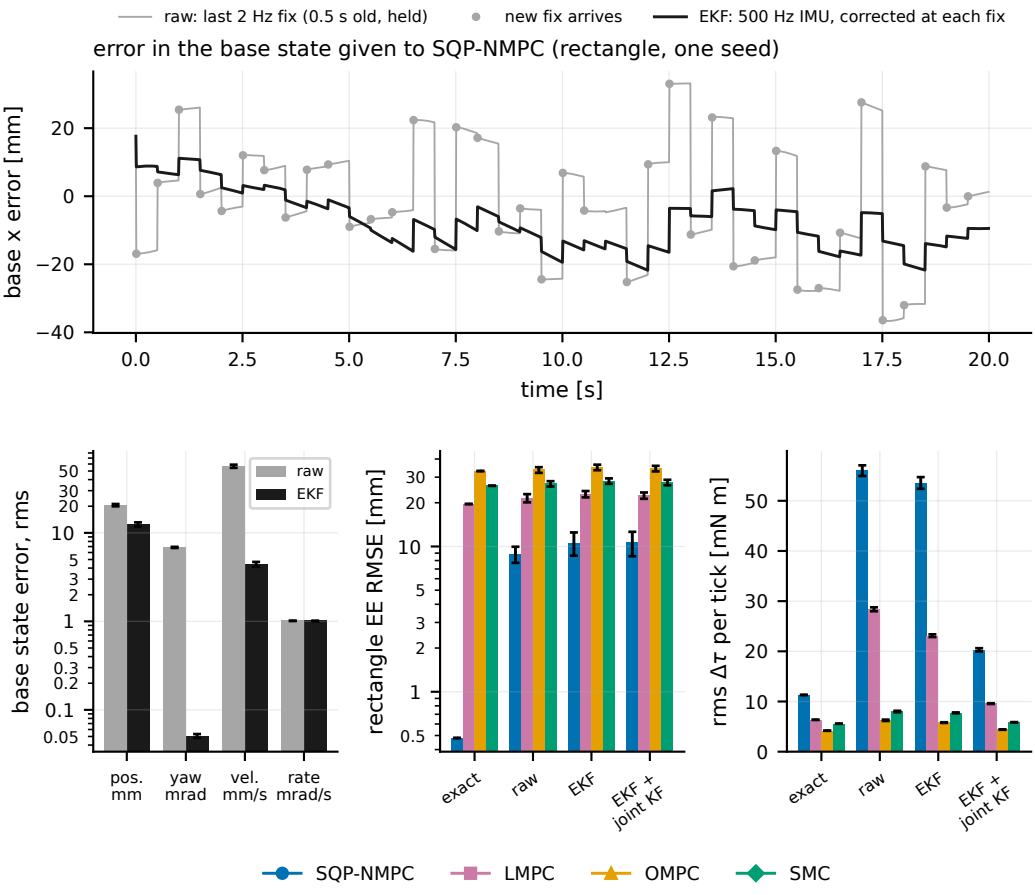
raw: last 2 Hz fix (0.5 s old, held)
new fix arrives
EKF: 500 Hz IMU, corrected at each fix
error in the base state given to SQP-NMPC (rectangle, one seed)
base x error [mm]
time [s]
raw
EKF
base state error, rms
pos. mm
yaw mrad
vel. mm/s
rate mrad/s
rectangle EE RMSE [mm]
exact
raw
EKF
EKF + joint KF
rms Δτ per tick [mN m]
SQP-NMPC
LMPC
OMPC
SMC