

CP2.8 — Modelling with Differential Equations

1. Simple Harmonic Motion (SHM)

SHM equation:

$$\frac{d^2x}{dt^2} = -\omega^2 x$$

This is the homogeneous ODE with AE $r^2 + \omega^2 = 0$, giving complex roots $r = \pm\omega i$.

1.1 Solution and Forms

$$x(t) = A \cos \omega t + B \sin \omega t$$


This can also be written in amplitude-phase form:

$$x(t) = R \cos(\omega t + \phi)$$

where $R = \sqrt{A^2 + B^2}$ (amplitude), and $\tan \phi = -B/A$ (or use $R \cos \phi = A$, $R \sin \phi = -B$ — check carefully).

Quantity	Formula
Angular frequency	ω (rad/s)
Period	$T = 2\pi/\omega$
Frequency	$f = 1/T = \omega/(2\pi)$

Amplitude	$R = \sqrt{A^2 + B^2}$
Velocity	$\dot{x} = -R\omega \sin(\omega t + \phi)$
Max speed	$R\omega$ (when $x = 0$)
Max acceleration	$R\omega^2$ (when $x = \pm R$)

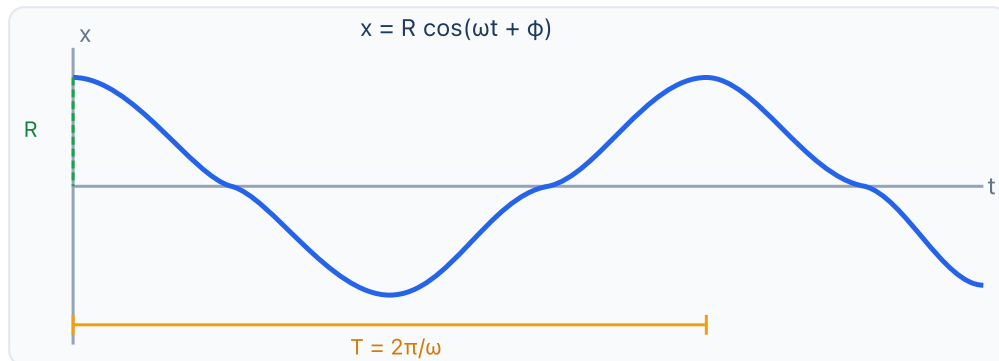

Example: A particle moves with SHM such that $\ddot{x} = -16x$. At $t = 0$: $x = 3$, $\dot{x} = 0$.

$\omega = 4$. GS: $x = A \cos 4t + B \sin 4t$.

$x(0) = 3 \Rightarrow A = 3$.

$\dot{x} = -4A \sin 4t + 4B \cos 4t$. $\dot{x}(0) = 0 \Rightarrow 4B = 0 \Rightarrow B = 0$.

Solution: $x = 3 \cos 4t$. Amplitude = 3, period = $\pi/2$.

2. Damped Oscillations


The **damped oscillation equation**:

$$\frac{d^2x}{dt^2} + 2k\frac{dx}{dt} + \omega^2x = 0$$

Auxiliary equation: $r^2 + 2kr + \omega^2 = 0$, so $r = -k \pm \sqrt{k^2 - \omega^2}$.

2.1 Three Cases

Case	Condition	Roots	Solution form	Behaviour
Overdamped	$k > \omega$	Two distinct negative reals	$x = Ae^{r_1 t} + Be^{r_2 t}$	Returns to equilibrium without oscillating, slowly
Critically damped	$k = \omega$	Repeated real $r = -k$	$x = (A + Bt)e^{-kt}$	Fastest return to equilibrium without oscillating
Underdamped	$k < \omega$	Complex $-k \pm \mu i$, $\mu = \sqrt{\omega^2 - k^2}$	$x = e^{-kt}(A \cos \mu t + B \sin \mu t)$	Oscillates with decreasing amplitude

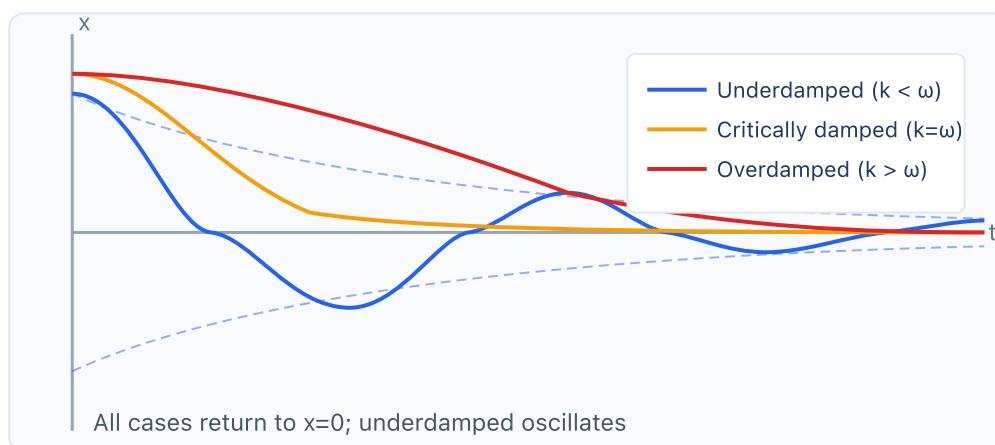

Example (Underdamped): Solve $\ddot{x} + 4\dot{x} + 13x = 0$, $x(0) = 2$, $\dot{x}(0) = 0$.

AE: $r^2 + 4r + 13 = 0 \Rightarrow r = -2 \pm 3i$. $k = 2$, $\mu = 3$.

GS: $x = e^{-2t}(A \cos 3t + B \sin 3t)$.

$x(0) = 2 \Rightarrow A = 2$.

$\dot{x} = e^{-2t}[(-2A + 3B) \cos 3t + (-3A - 2B) \sin 3t]$

$\dot{x}(0) = -2A + 3B = 0 \Rightarrow B = 4/3$.

Solution: $x = e^{-2t} \left(2 \cos 3t + \frac{4}{3} \sin 3t \right)$.

3. Forced Oscillations and Resonance

The **forced oscillation equation**:

$$\frac{d^2x}{dt^2} + 2k\frac{dx}{dt} + \omega^2x = F \cos \Omega t$$

The **particular integral** gives the **steady-state response**; the CF gives the **transient**.

Resonance occurs when the forcing frequency Ω equals the natural frequency ω of the system (and there is no damping). The amplitude grows without bound.

Undamped resonance: $\ddot{x} + \omega^2x = F \cos \omega t$.

The trial PI $a \cos \omega t + b \sin \omega t$ is in the CF — use $x_p = t(a \cos \omega t + b \sin \omega t)$.

This gives $x_p = \frac{F}{2\omega} t \sin \omega t$ — amplitude grows linearly with time.

Example: Solve $\ddot{x} + 4x = 3 \cos 2t$, $x(0) = 0$, $\dot{x}(0) = 0$.

CF: $A \cos 2t + B \sin 2t$. Resonance: try $x_p = t(a \cos 2t + b \sin 2t)$.

$$\dot{x}_p = a \cos 2t + b \sin 2t + t(-2a \sin 2t + 2b \cos 2t)$$

$$\ddot{x}_p = -4a \sin 2t + 4b \cos 2t + t(-4a \cos 2t - 4b \sin 2t)$$

$$\ddot{x}_p + 4x_p = -4a \sin 2t + 4b \cos 2t = 3 \cos 2t$$

$$b = 3/4, a = 0. \text{ PI: } x_p = \frac{3t \sin 2t}{4}.$$

$$\text{GS: } x = A \cos 2t + B \sin 2t + \frac{3t \sin 2t}{4}.$$

$$x(0) = 0 \Rightarrow A = 0. \dot{x}(0) = 2B + 0 = 0 \Rightarrow B = 0.$$

$$\text{Solution: } x = \frac{3t \sin 2t}{4}. \text{ Amplitude } \frac{3t}{4} \text{ grows unboundedly.}$$

4. Coupled Differential Equations

Two simultaneous ODEs in two unknowns $x(t)$ and $y(t)$ can be solved by **elimination**: differentiate one equation and substitute the other to get a single second-order ODE in one variable.

Example: Solve the coupled system:

$$\frac{dx}{dt} = 3x - 2y, \quad \frac{dy}{dt} = 2x - y$$

Differentiate the first: $\ddot{x} = 3\dot{x} - 2\dot{y}$.

From the second: $\dot{y} = 2x - y$. Substitute: $\ddot{x} = 3\dot{x} - 2(2x - y) = 3\dot{x} - 4x + 2y$.

From the first: $2y = 3x - \dot{x}$, so $y = \frac{3x - \dot{x}}{2}$. Substitute:

$$\ddot{x} = 3\dot{x} - 4x + 3x - \dot{x} = 2\dot{x} - x$$

$$\ddot{x} - 2\dot{x} + x = 0. \text{ AE: } (r - 1)^2 = 0, r = 1 \text{ (repeated).}$$

$$x = (A + Bt)e^t. \text{ Then } y = \frac{3x - \dot{x}}{2}:$$

$$\dot{x} = (A + Bt)e^t + Be^t = (A + B + Bt)e^t.$$

$$y = \frac{(3A + 3Bt - A - B - Bt)e^t}{2} = \frac{(2A - B + 2Bt)e^t}{2} = \left(A - \frac{B}{2} + Bt\right)e^t.$$

Exam tip: For coupled ODEs, the method is: differentiate one equation, express the eliminated variable from the other, and substitute. Expect a 2nd-order ODE. Once $x(t)$ is found, find $y(t)$ algebraically from one of the original equations.

5. Predator-Prey and Population Models

Coupled ODEs model interacting populations. The **Lotka-Volterra** system is non-linear (beyond the spec), but linear approximations near equilibria are examinable.

Example: In a model, prey x and predator y satisfy:

$$\frac{dx}{dt} = ax - bxy, \quad \frac{dy}{dt} = cxy - dy$$

Near equilibrium $(\bar{x}, \bar{y}) = (d/c, a/b)$, linearised equations are coupled first-order ODEs — solve as above.

6. Other Modelling Scenarios

6.1 Population Growth — Logistic Equation

$$\frac{dP}{dt} = rP \left(1 - \frac{P}{K}\right)$$

where r = growth rate, K = carrying capacity. This is a separable first-order ODE.

Solution: Using partial fractions on $\int \frac{dP}{P(1 - P/K)}$:

$$P(t) = \frac{K}{1 + \left(\frac{K - P_0}{P_0}\right) e^{-rt}}$$

As $t \rightarrow \infty$, $P \rightarrow K$ (carrying capacity). The solution is the logistic curve — S-shaped.

6.2 Newton's Law of Cooling

$$\frac{d\theta}{dt} = -k(\theta - \theta_{\text{amb}})$$

where θ = temperature of object, θ_{amb} = ambient temperature, $k > 0$.

This is a first-order linear ODE. Solution: $\theta = \theta_{\text{amb}} + (\theta_0 - \theta_{\text{amb}})e^{-kt}$.

6.3 Formulating a DE from Context

Key steps:

1. Identify the dependent variable and what it depends on
2. Write a word equation: "rate of change = inflow - outflow" (or similar)
3. Translate to mathematical symbols
4. Identify the type of ODE and solve

Example: A tank contains 1000 L of water with 50 kg of salt dissolved. Pure water enters at 10 L/min and the well-mixed solution leaves at 10 L/min. Find the amount of salt $S(t)$ at time t .

Rate in = 0 kg/min (pure water). Rate out = $\frac{S}{1000} \cdot 10 = \frac{S}{100}$ kg/min.
 ODE: $\frac{dS}{dt} = -\frac{S}{100}$. This separates: $S = 50e^{-t/100}$.

7. SHM — Worked Energy Connection

From $\ddot{x} = -\omega^2 x$, writing $\ddot{x} = v \frac{dv}{dx}$:

$$v \frac{dv}{dx} = -\omega^2 x \Rightarrow \frac{v^2}{2} = \frac{\omega^2(R^2 - x^2)}{2}$$

$$v^2 = \omega^2(R^2 - x^2)$$

Maximum speed = ωR at $x = 0$; zero speed at $x = \pm R$ (amplitude).

8. Summary Table — Modelling Equations

Model	ODE	Solution form
SHM	$\ddot{x} = -\omega^2 x$	$R \cos(\omega t + \phi)$
Overdamped	$\ddot{x} + 2k\dot{x} + \omega^2 x = 0, k > \omega$	$Ae^{r_1 t} + Be^{r_2 t}$ (both $r < 0$)
Critical damping	Same, $k = \omega$	$(A + Bt)e^{-kt}$
Underdamped	Same, $k < \omega$	$e^{-kt}(A \cos \mu t + B \sin \mu t)$
Resonance	$\ddot{x} + \omega^2 x = F \cos \omega t$	Amplitude $\propto t$
Newton's cooling	$\dot{\theta} = -k(\theta - \theta_a)$	$\theta_a + Ce^{-kt}$
Logistic growth	$\dot{P} = rP(1 - P/K)$	S-shaped, $P \rightarrow K$

9. Exam-Style Practice Questions

- [SHM]** A particle oscillates with SHM described by $\ddot{x} + 25x = 0$. Given $x = 4$ and $\dot{x} = -15$ when $t = 0$:
 - Find x as a function of t .
 - Find the amplitude and period.
 - Write x in the form $R \cos(5t + \phi)$.
- [Damping]** Solve $\ddot{x} + 6\dot{x} + 9x = 0$ with $x(0) = 1, \dot{x}(0) = 2$. Identify the type of damping. Sketch the solution.
- [Forced oscillation]** Find the general solution of $\ddot{x} + 9x = 12 \cos 3t$. Comment on the physical significance.
- [Coupled ODEs]** Solve the system $\dot{x} = 2x + y, \dot{y} = x + 2y$ with $x(0) = 3, y(0) = 1$.
- [Modelling]** The temperature $\theta^\circ\text{C}$ of a metal bar satisfies Newton's law of cooling with ambient temperature 20°C . Initially $\theta = 80^\circ\text{C}$ and after 5 minutes $\theta = 60^\circ\text{C}$. Find (a) the value of k , (b) the time when $\theta = 30^\circ\text{C}$.
- [Logistic]** A population grows logistically with $r = 0.1$ per year and $K = 5000$. Initially $P = 500$. Find the population after 10 years.

General exam tips for CP2.8:

- SHM: state the ODE in the form $\ddot{x} = -\omega^2 x$ explicitly, then quote the general solution form
- Damping: always identify which case (over/critical/under) before solving
- Forced resonance: if $\Omega = \omega$ appears, immediately flag that the standard PI fails and multiply by t
- Coupled ODEs: eliminate one variable completely — do not try to integrate a coupled system directly
- Modelling: define your variables carefully; identify the type of ODE before solving
- Check units and physical sense in the answer (e.g., population cannot be negative)