




Start State
Mutex = 1
Wrt = 1

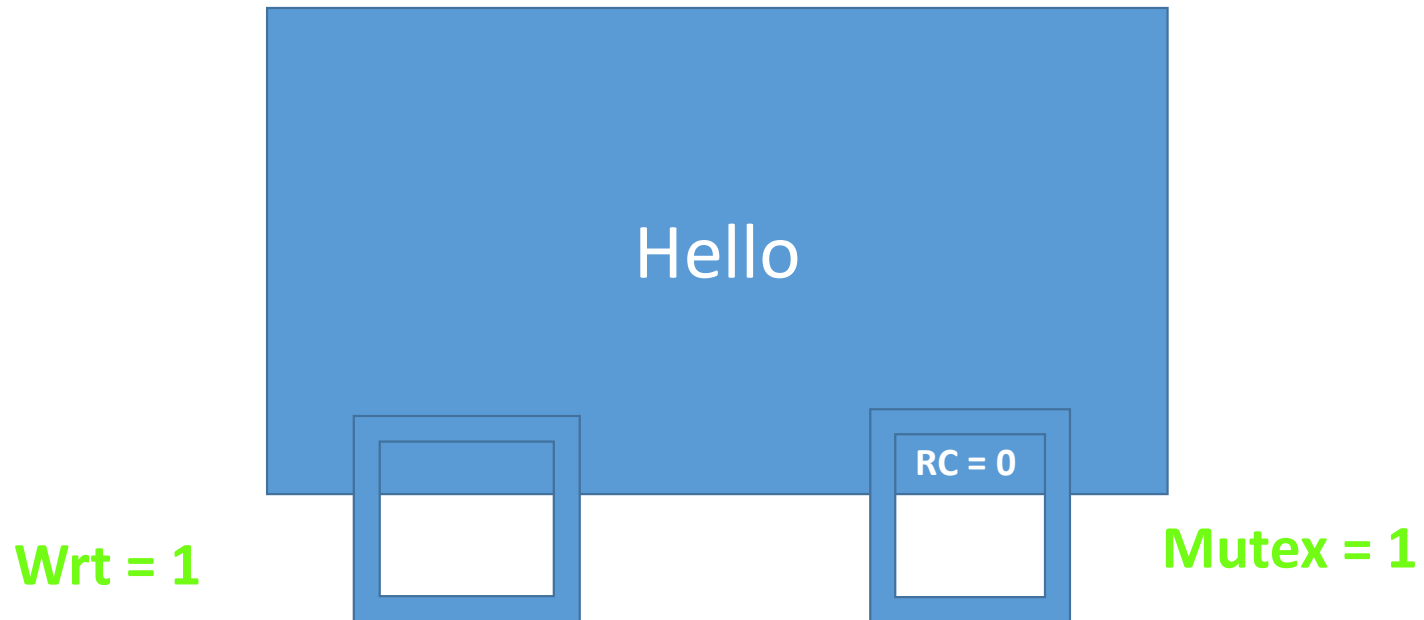

Processes arrived in sequence – W1, R1, W2, R2, W3, R3

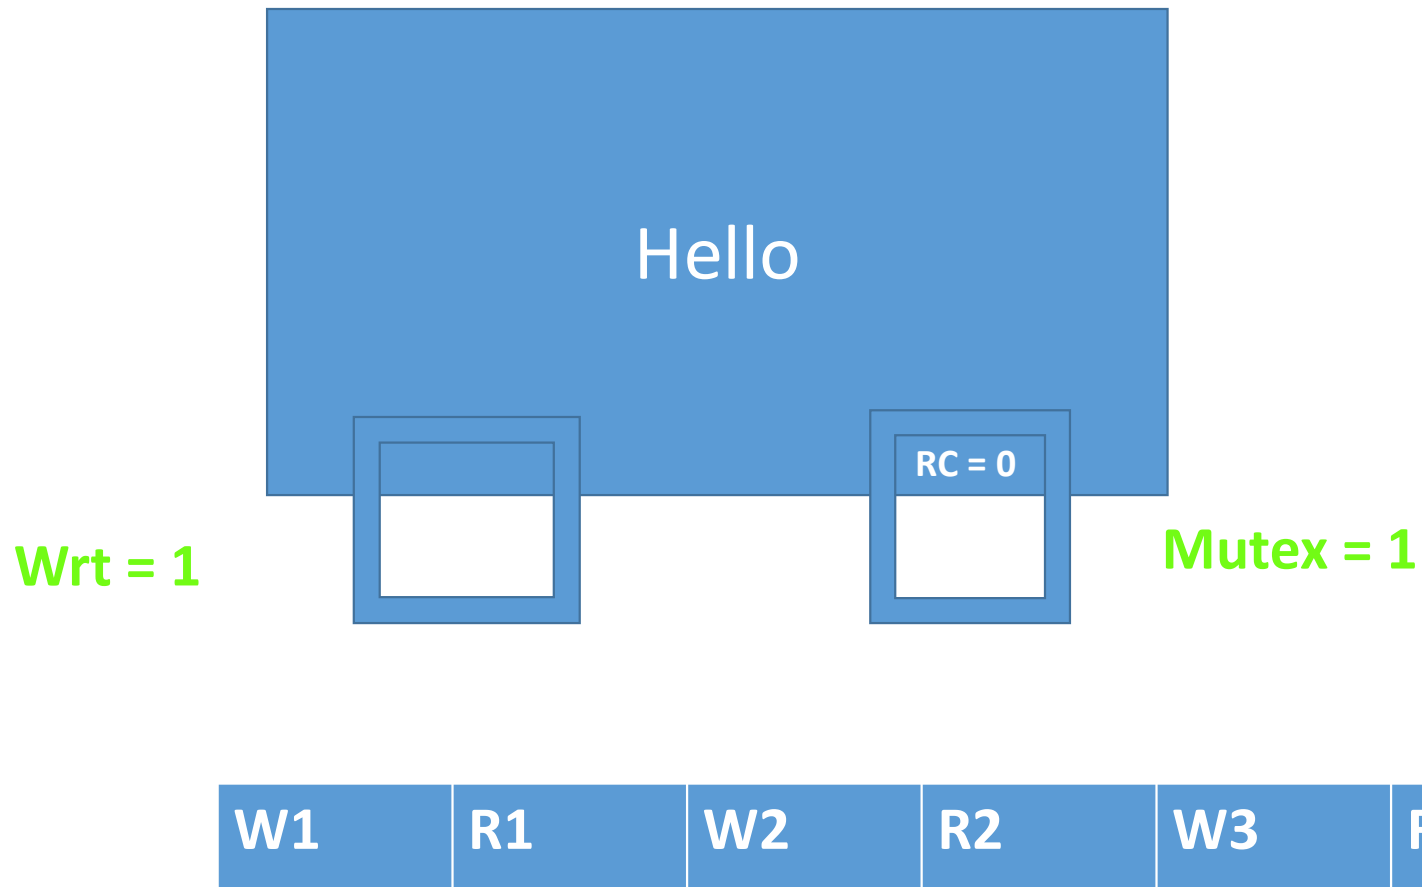


Writer Process – W1 is scheduled first

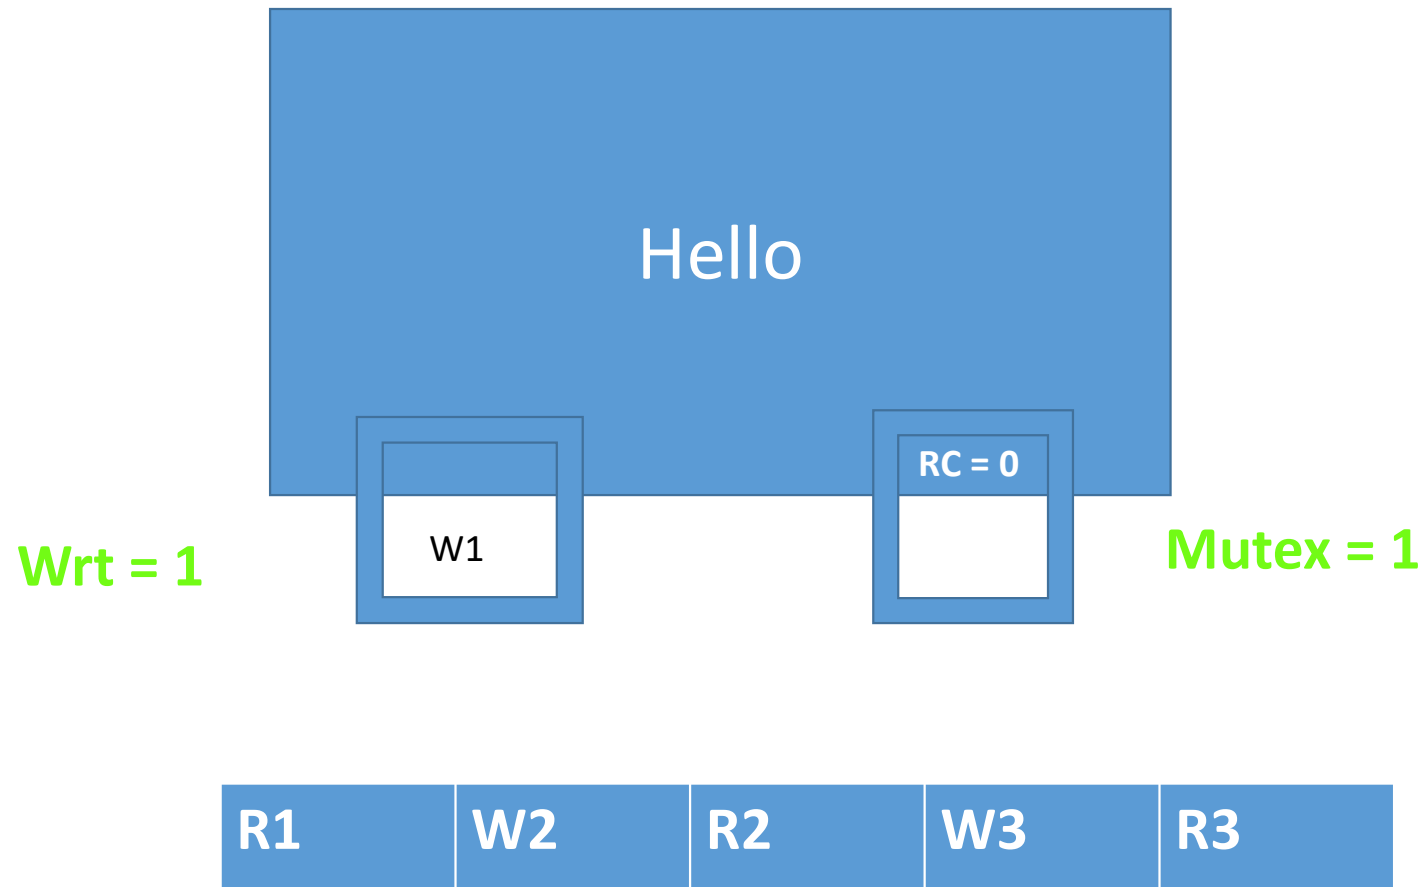


Writer Process – W1 acquired a lock and started writing



Writer Process – W1 completed the writing, released a lock and left

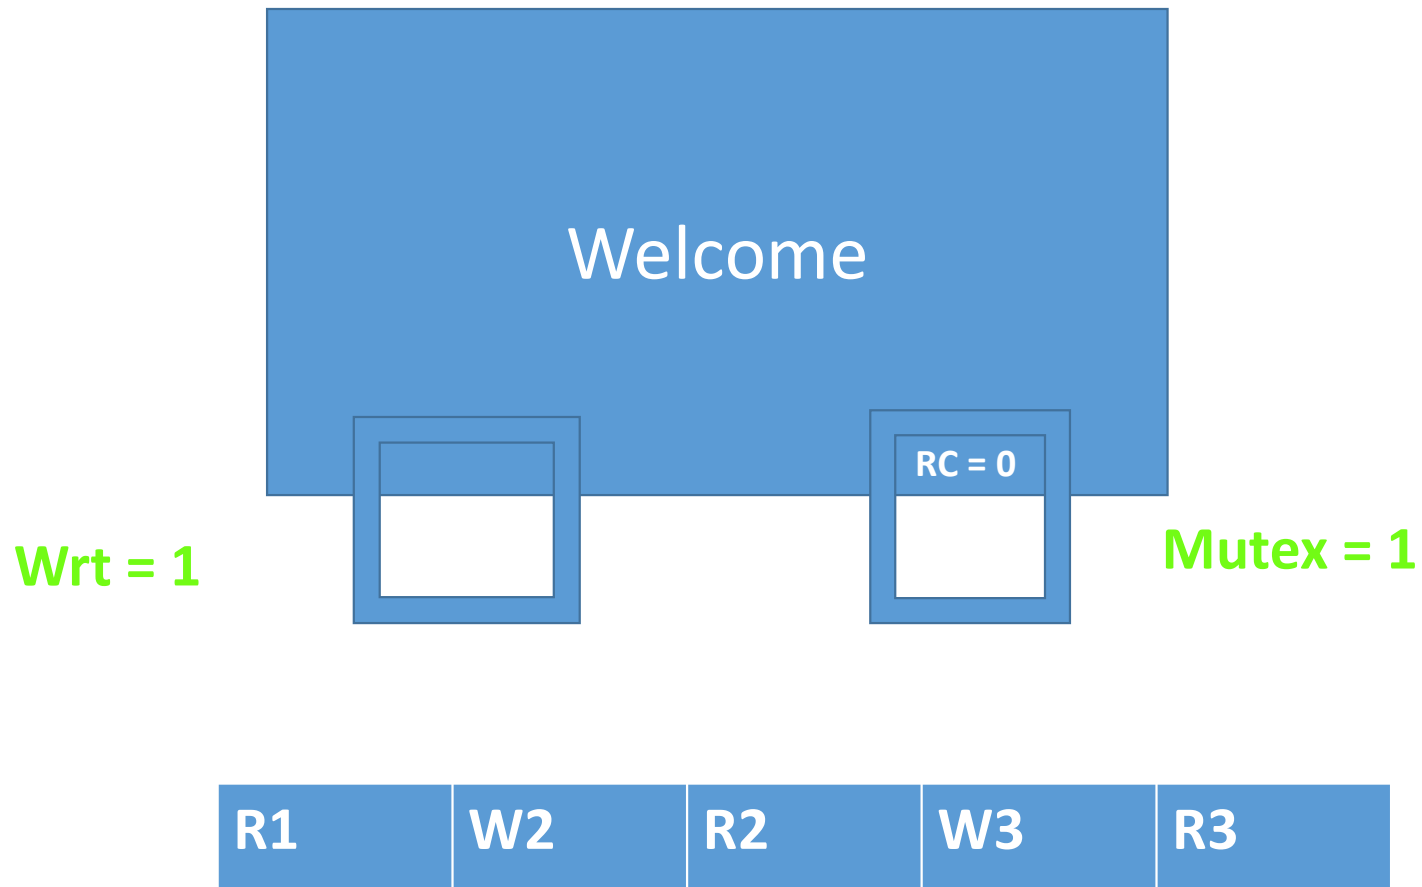


Reader Process – R1 scheduled next

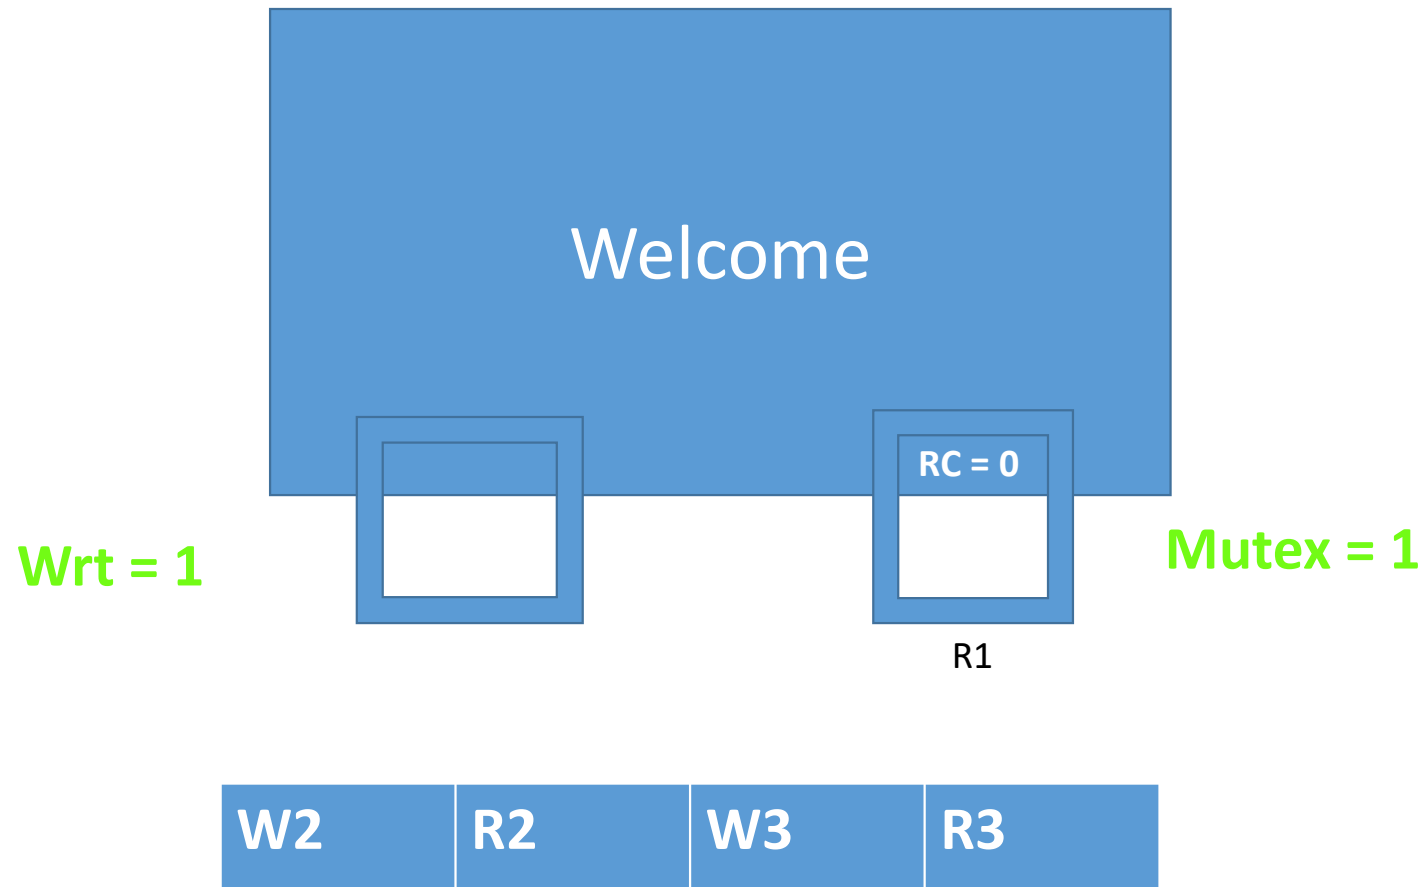


Reader Process – R1 acquired Mutex and incremented read count



Reader Process – R1 is first process, so it acquired Wrt (Closed the door for Writers) and released Mutex and started reading.

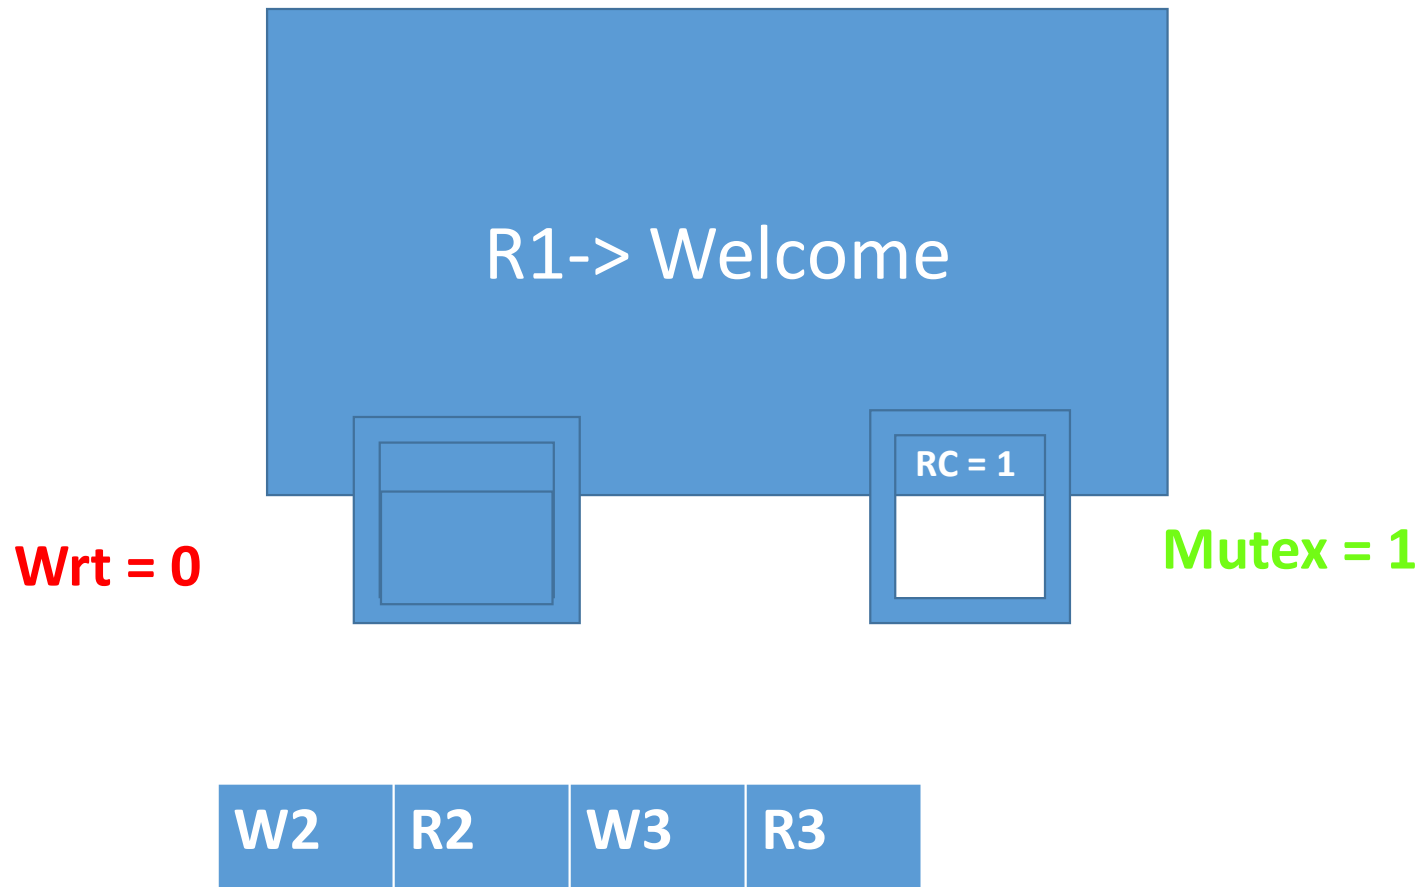


Reader Process – R2 Will be scheduled next.

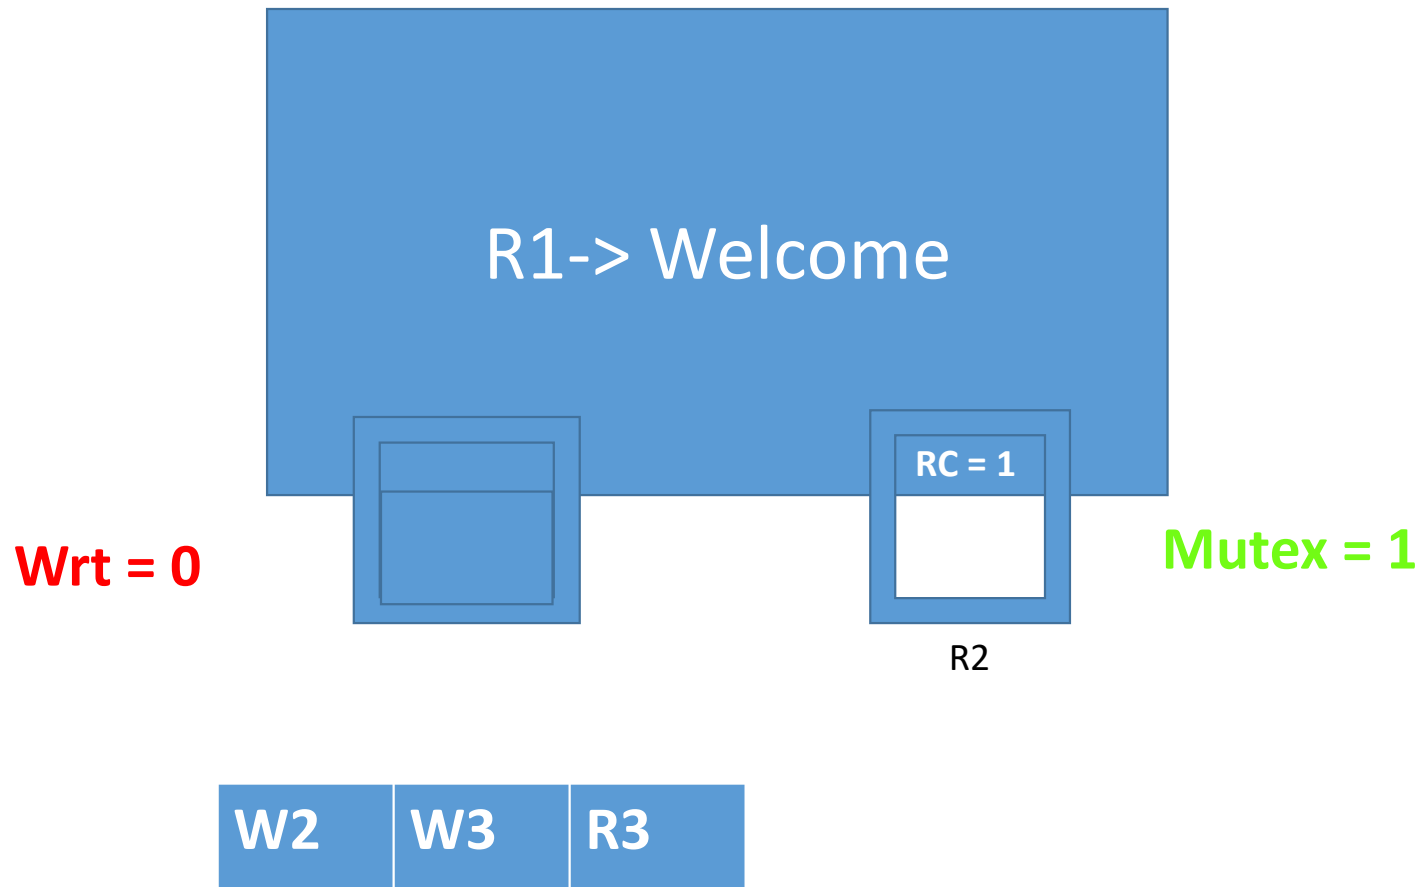




W2	W3	R3
----	----	----


Reader Process – R2 released Mutex and started reading.

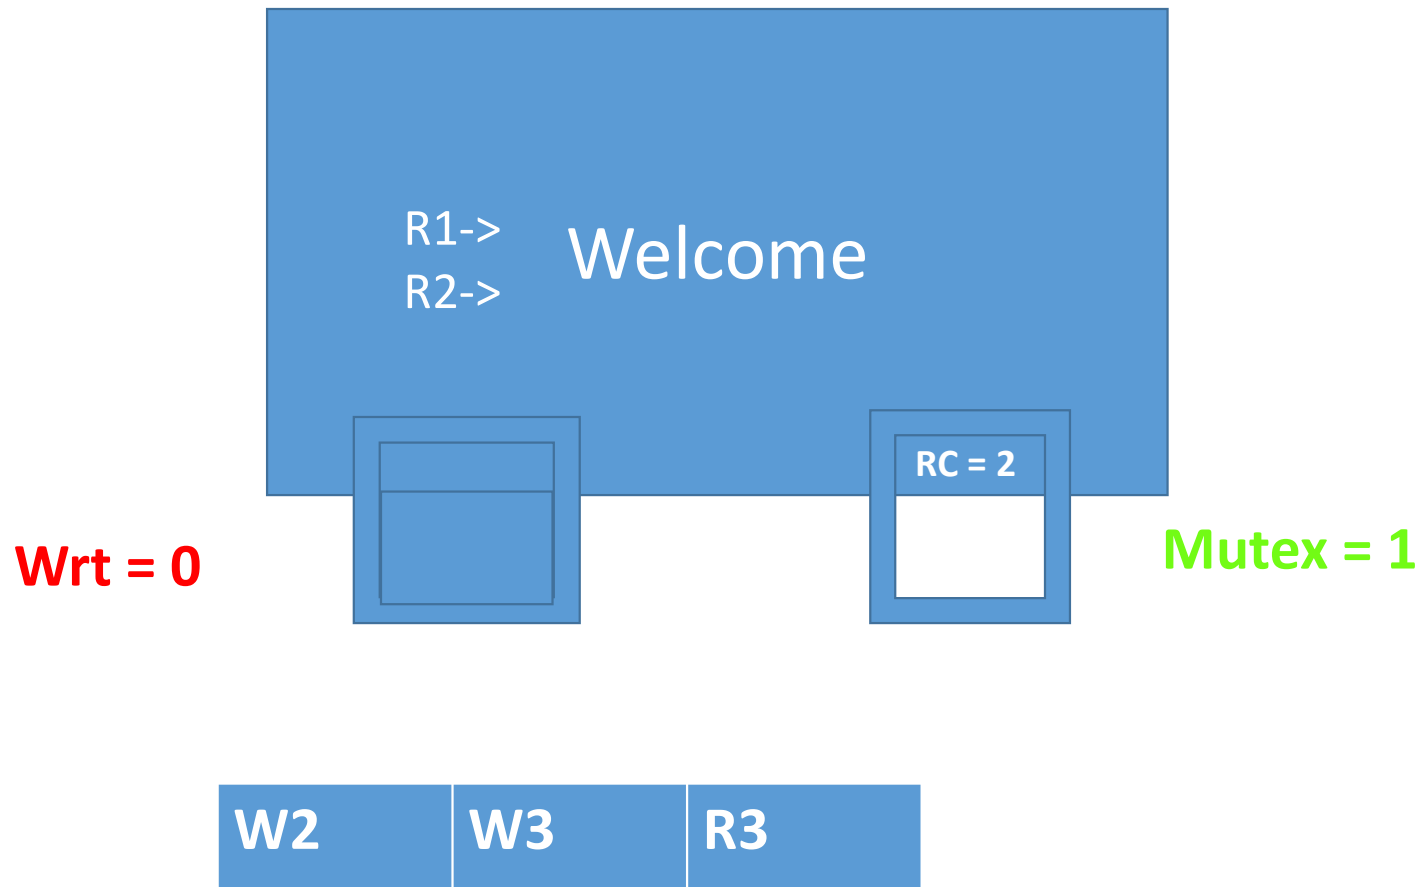


Reader Process – R3 Will be scheduled next.

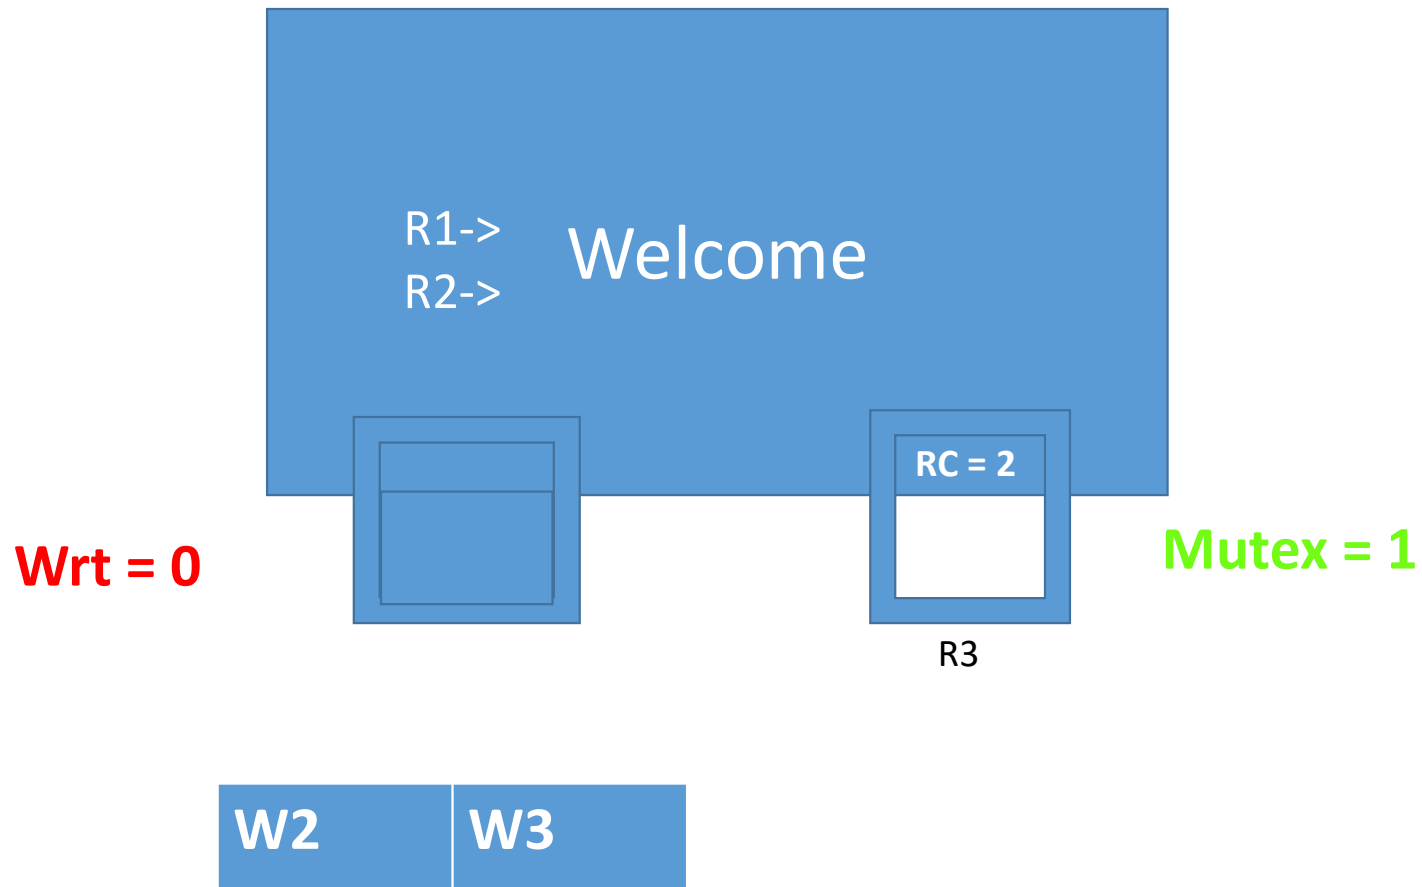


Reader Process – R3 acquired Mutex and incremented read count

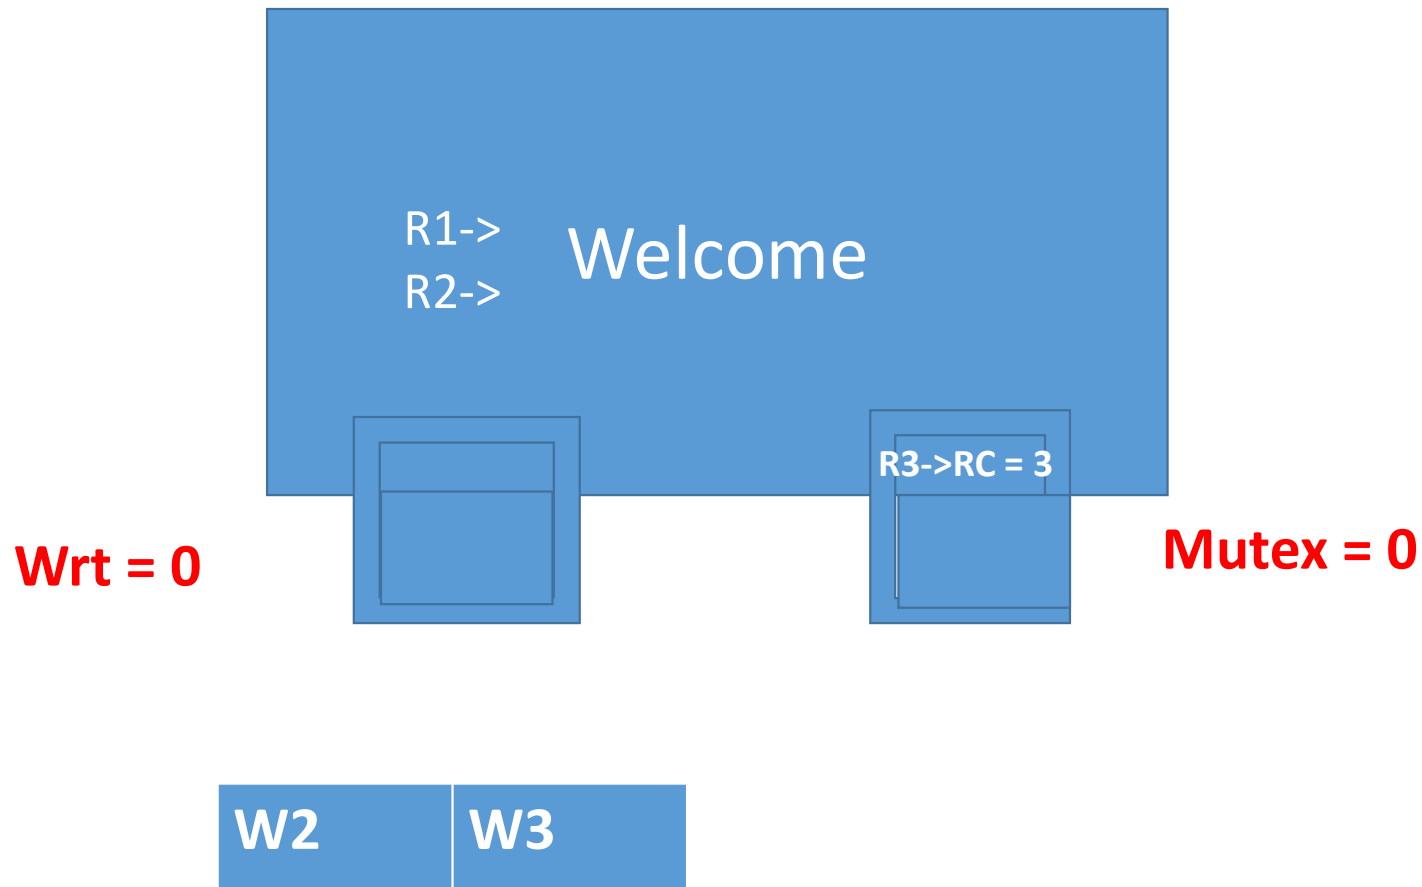


Reader Process – R3 started reading

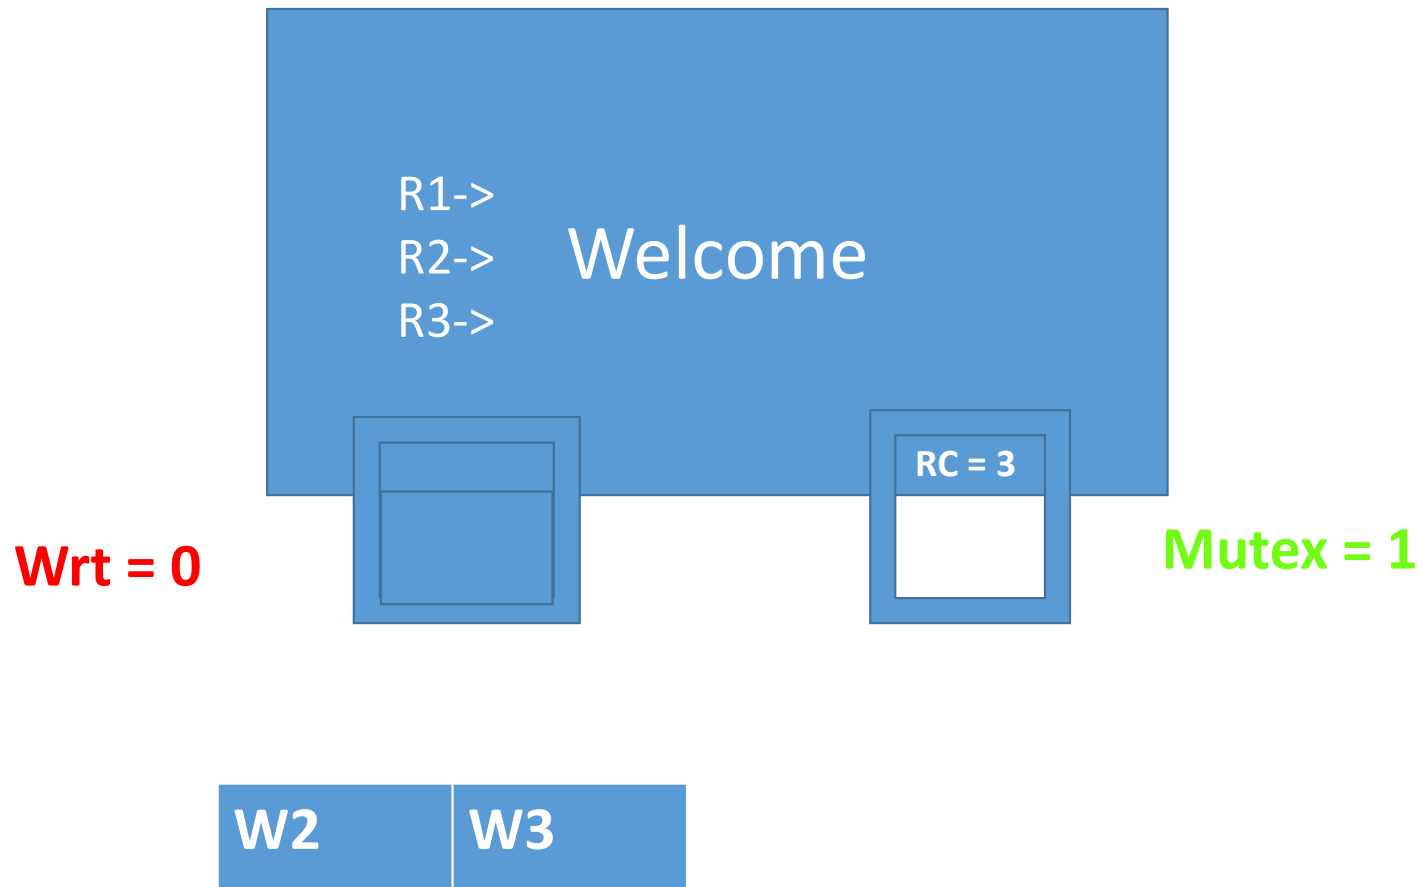

Reader Process – R1 Finished reading – acquired Mutex and decremented readcount

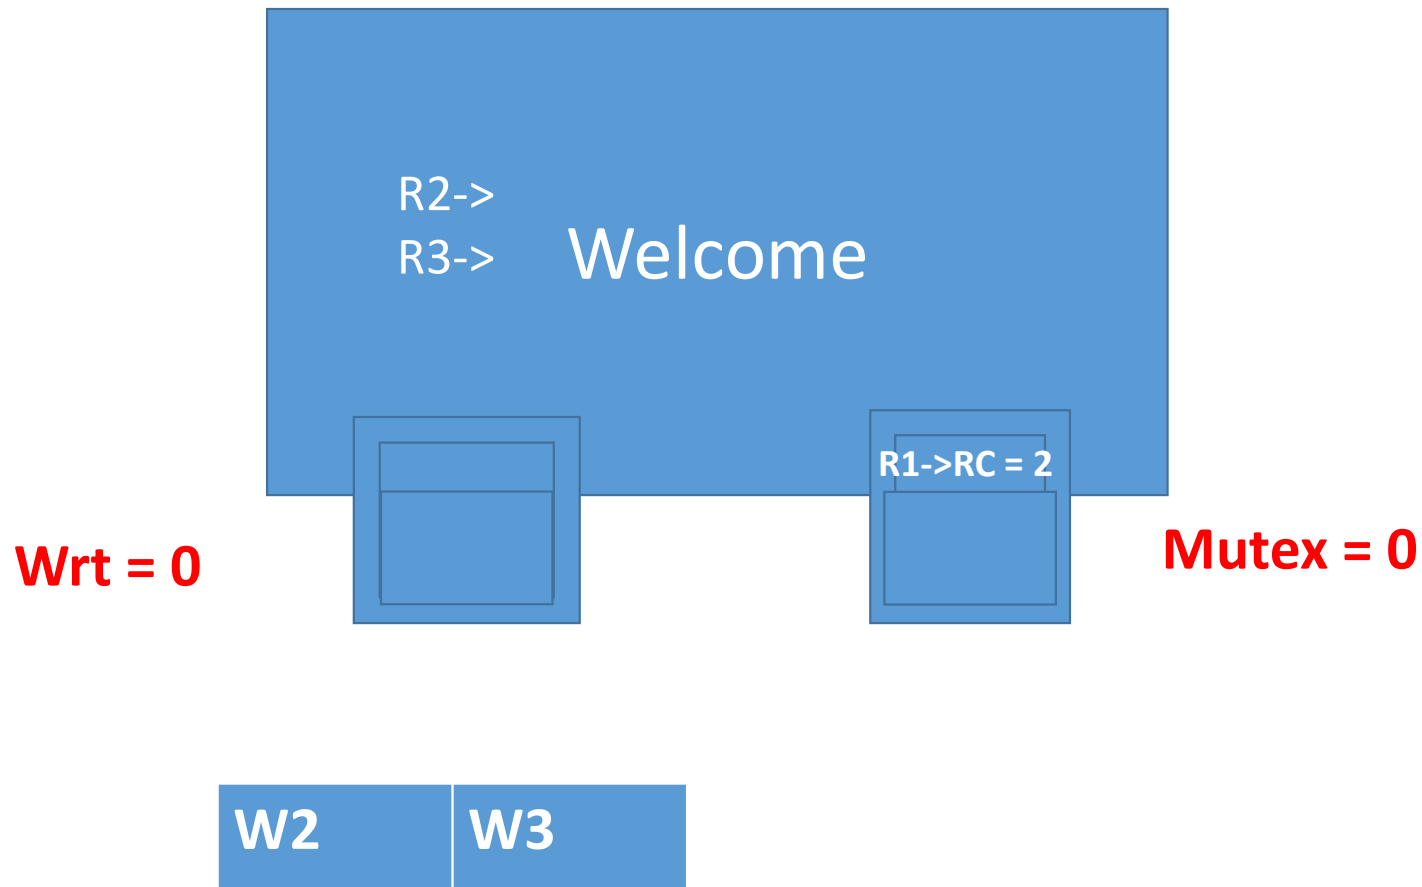


Reader Process – R1 Released Mutex and Left

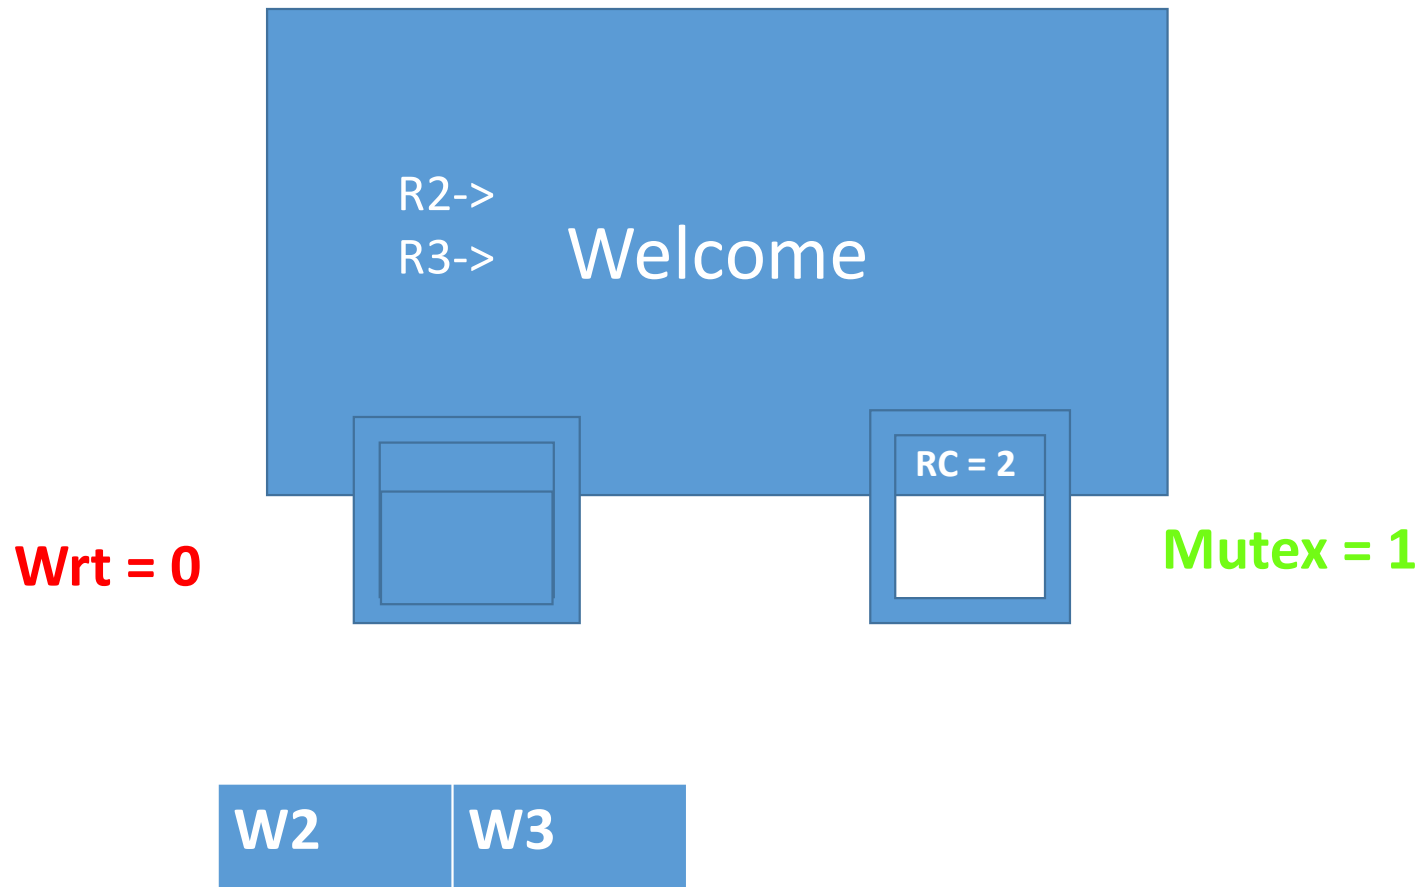

Reader Process – R2 Finished reading – acquired Mutex and decremented readcount




Reader Process – R2 Released Mutex and Left

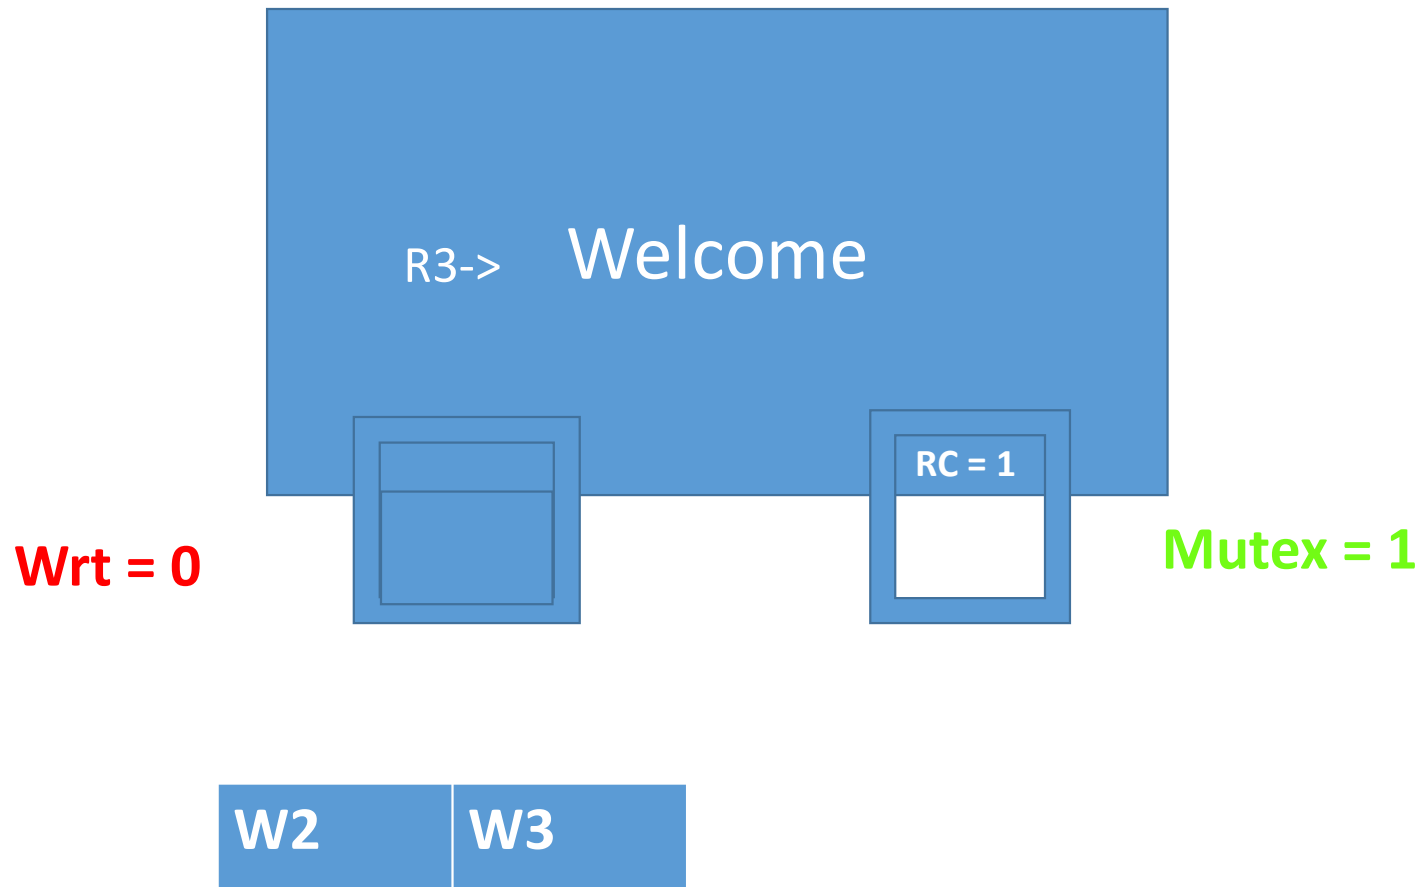


Reader Process – R3 Finished reading – acquired Mutex and decremented readcount




Reader Process – As readcount is 0, R3 will release Wrt (Open a door for Writers) and Mutex

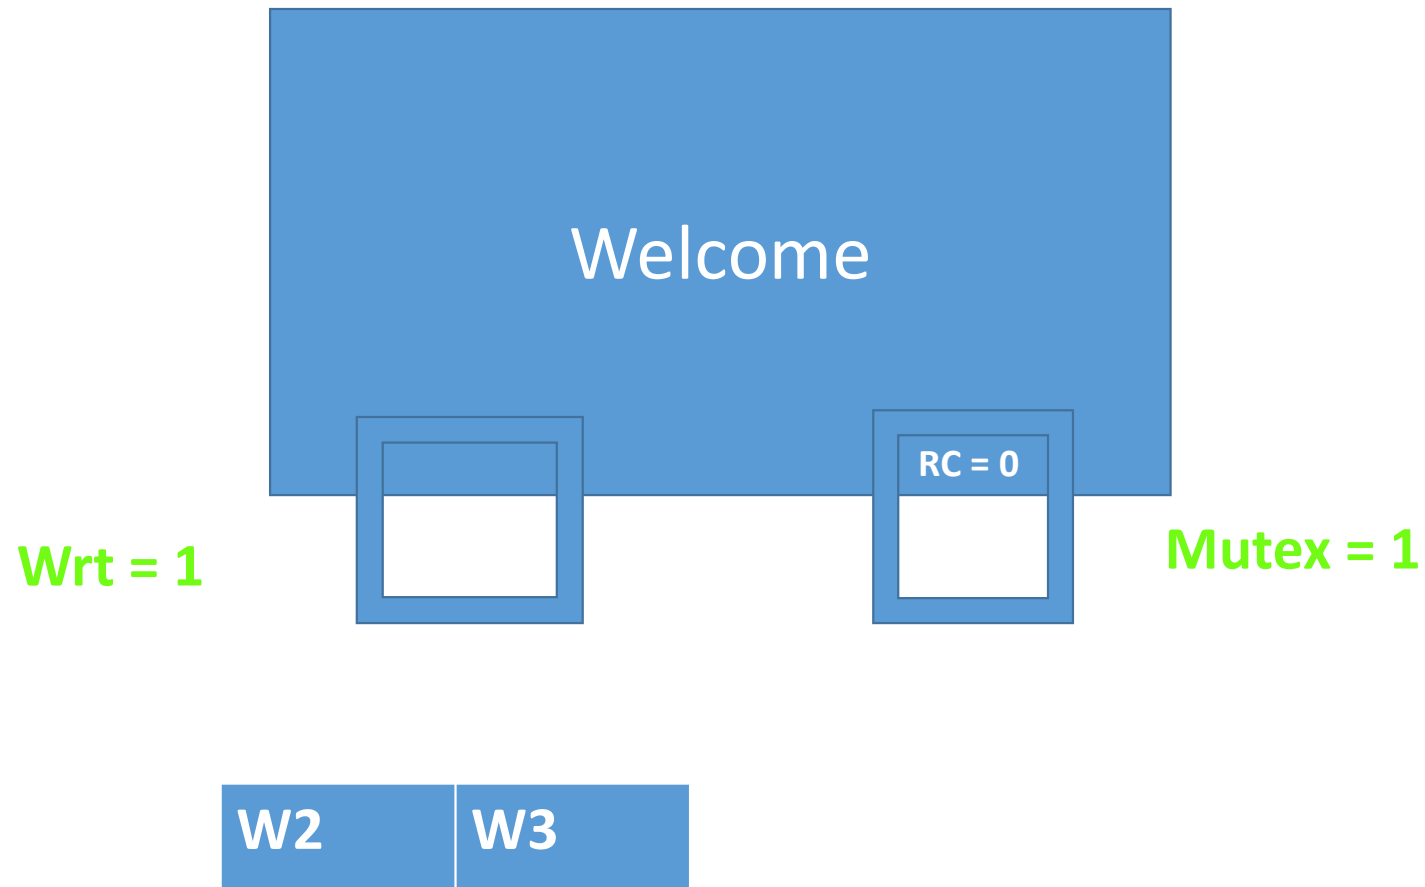


Writer Process –W2 will be scheduled next

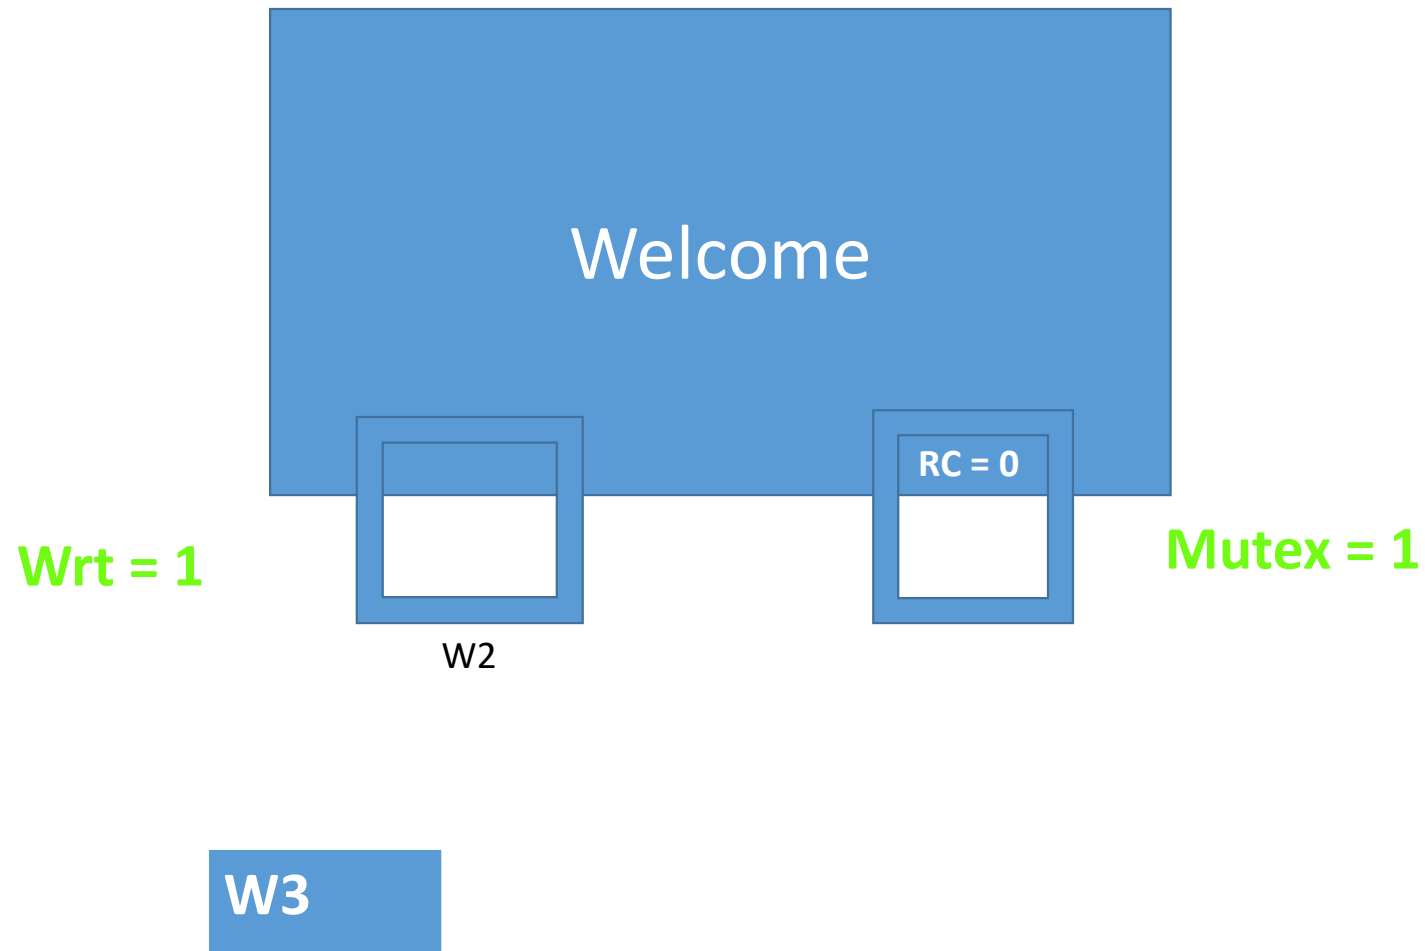


Writer Process –W2 acquired wrt and started writing

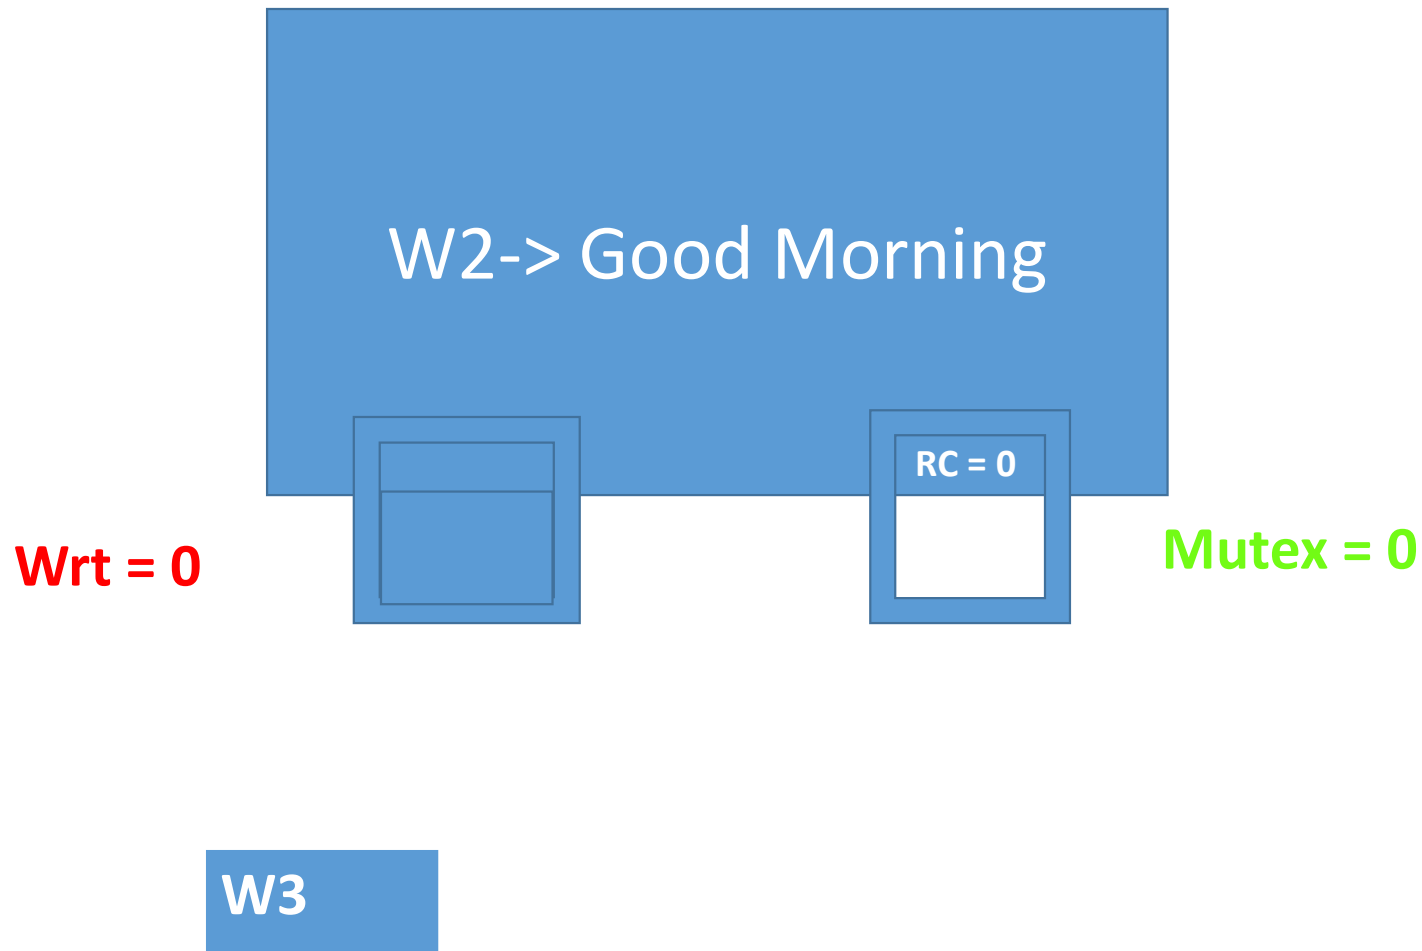


Writer Process –W2 Finished writing, released wrt and left

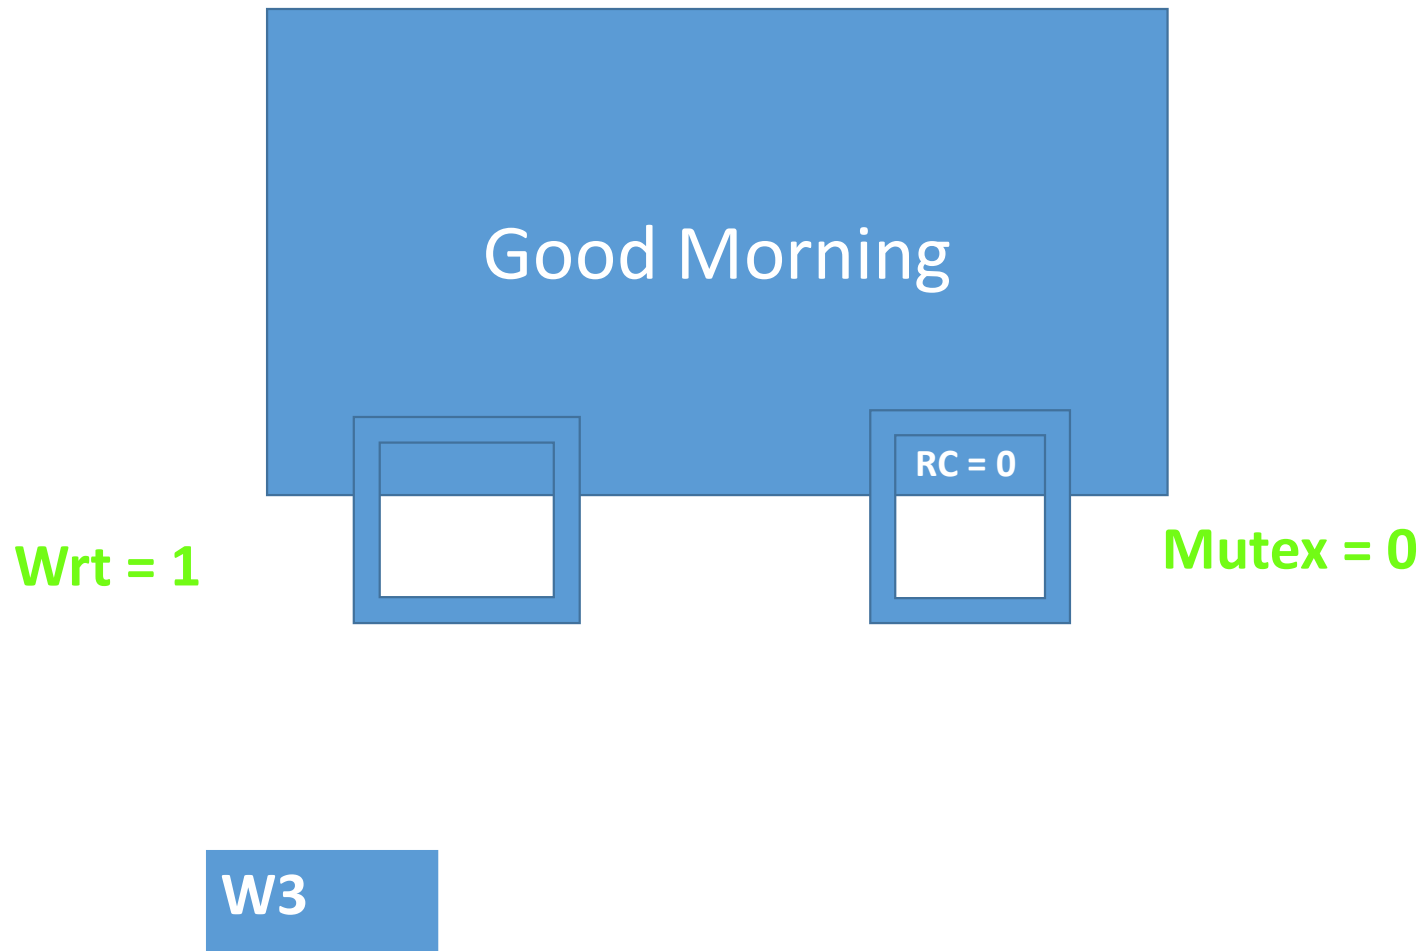

Writer Process –W3 will be Scheduled next

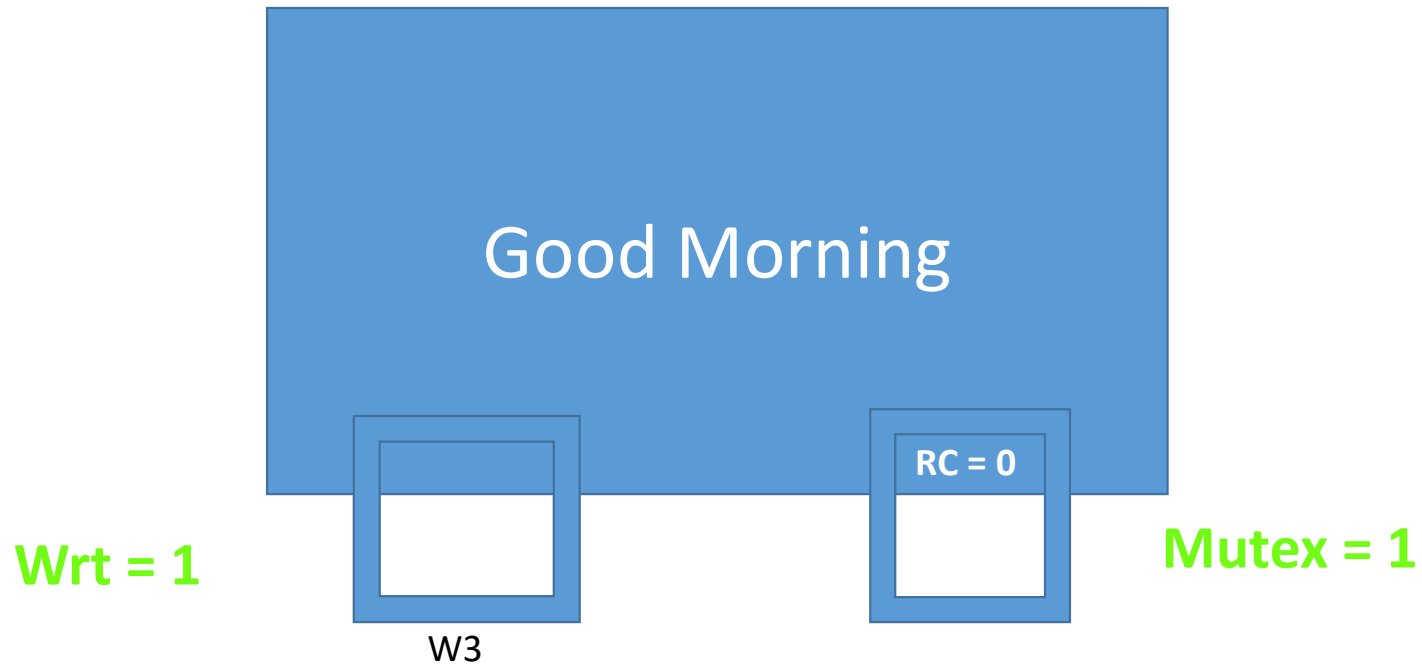

Writer Process –W3 acquired wrt – Started Writing

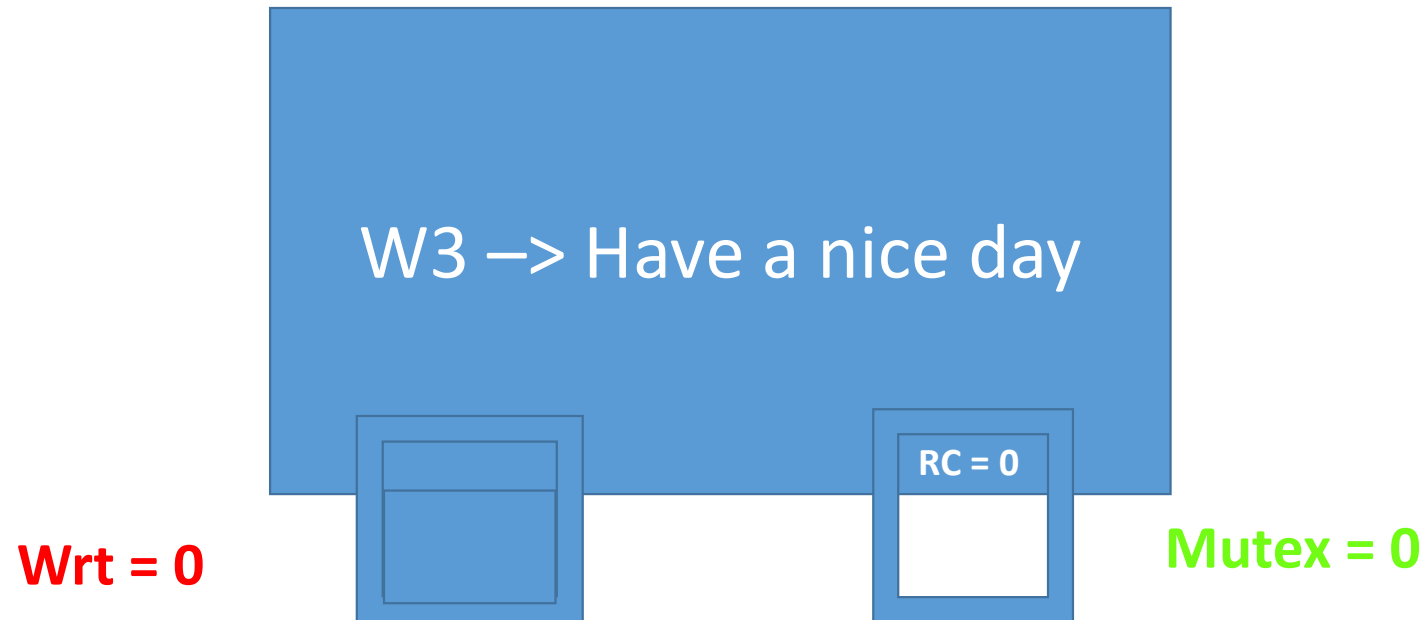

Writer Process –W3 finished writing, released wrt – left

