Wiring diagram — voice-based driver identification (CAN version)
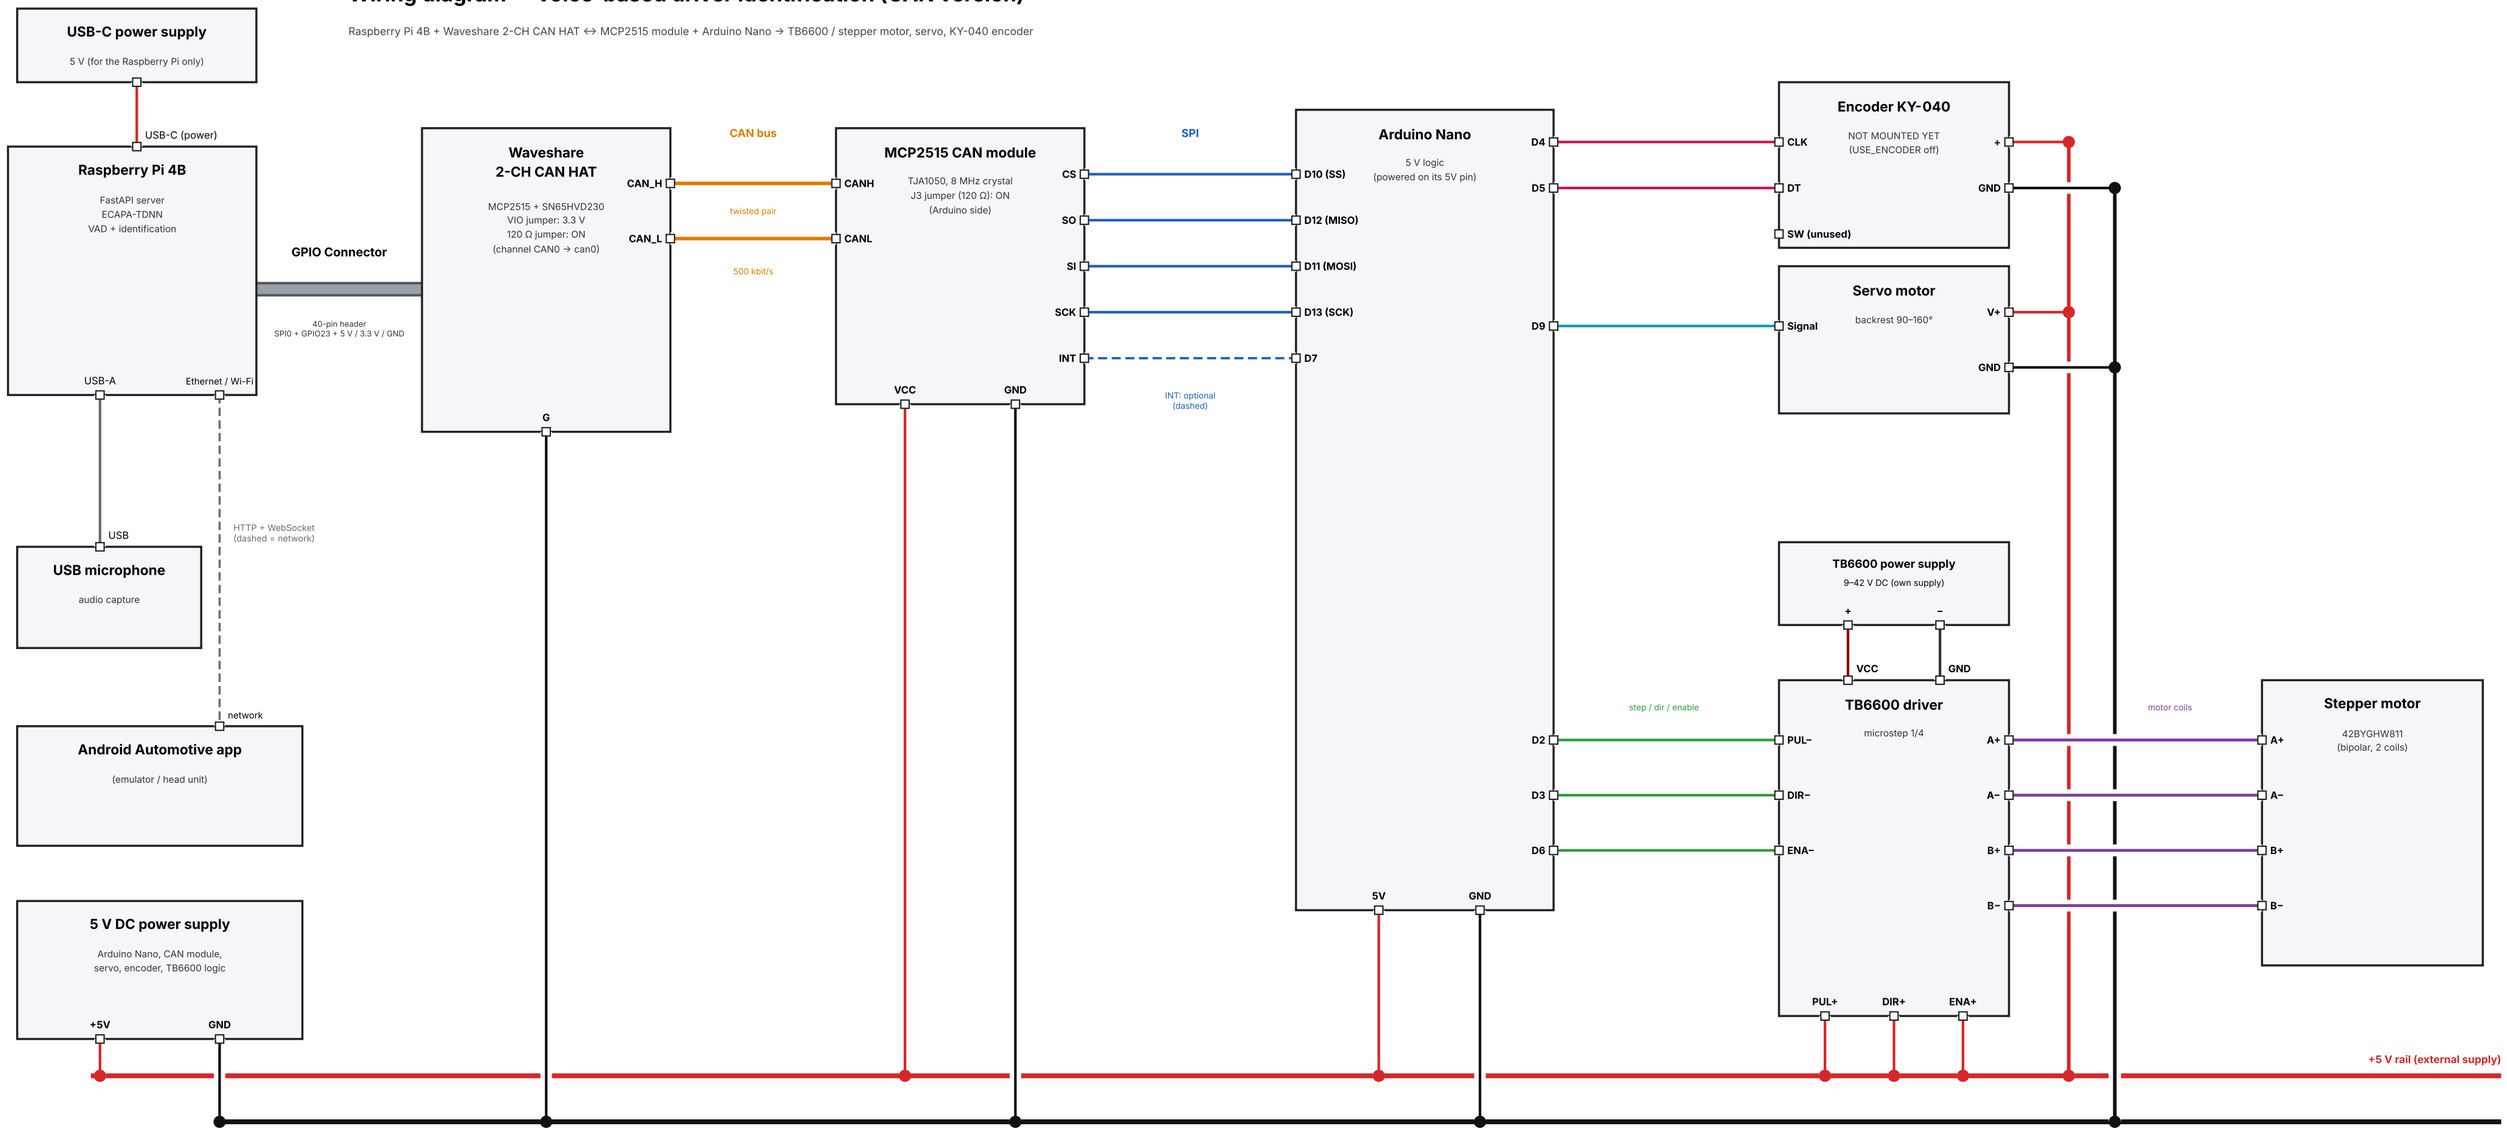
Raspberry Pi 4B + Waveshare 2-CH CAN HAT ↔ MCP2515 module + Arduino Nano → TB6600 / stepper motor, servo, KY-040 encoder