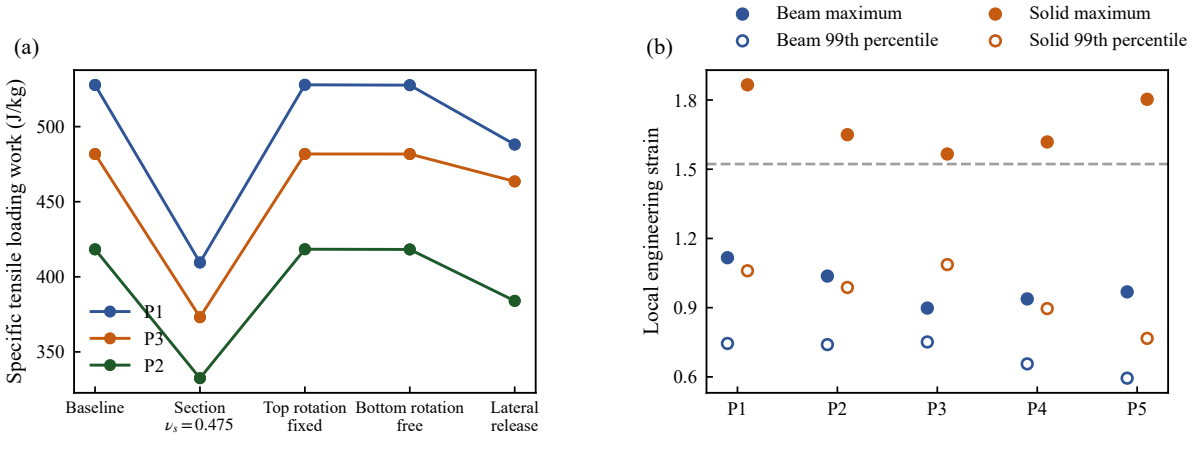
(a)
Specific tensile loading work (J/kg)
500
450
400
350
P1
P3
P2
Baseline
Section
$\nu_s = 0.475$
Top rotation
fixed
Bottom rotation
free
Lateral
release
(b)
Beam maximum
Beam 99th percentile
Solid maximum
Solid 99th percentile
Local engineering strain
1.8
1.5
1.2
0.9
0.6
P1
P2
P3
P4
P5