




POWER - USB-C 5 V

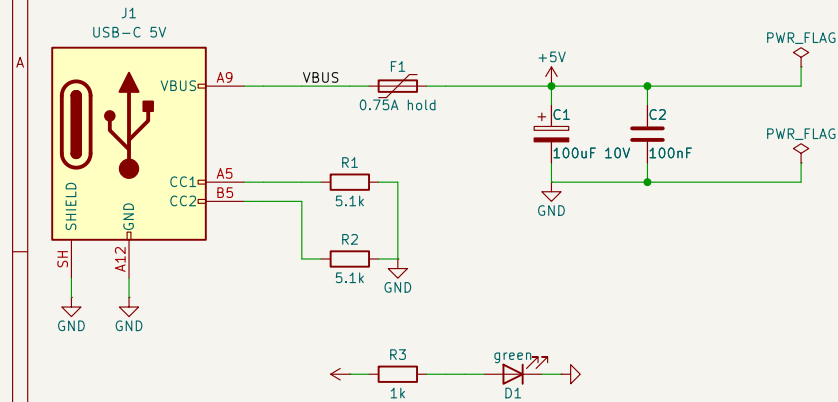


MCU – ATmega328P, Uno pinout

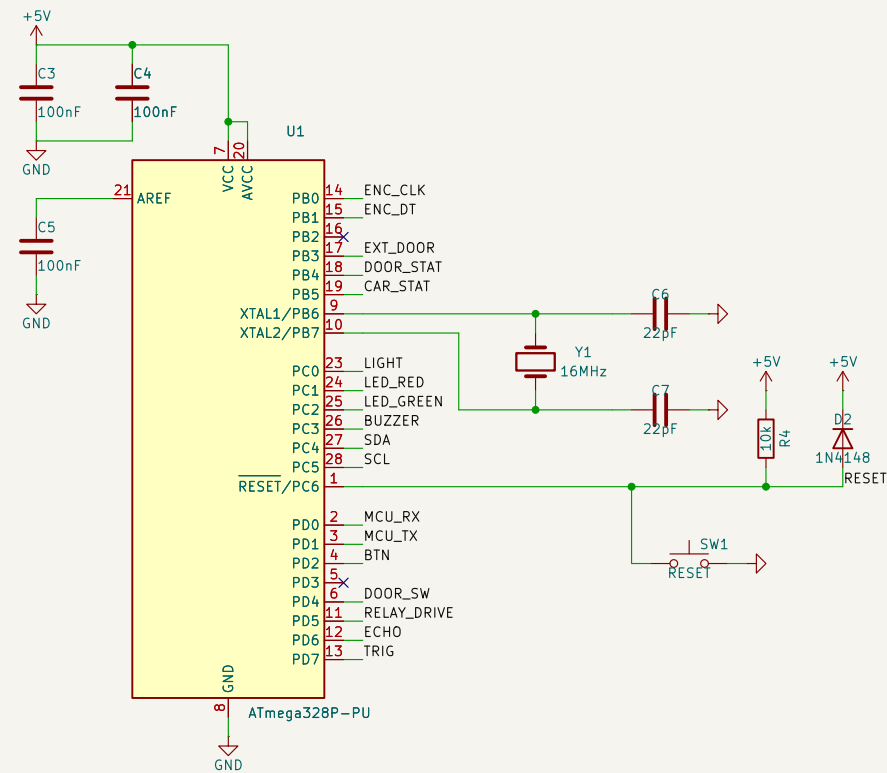


PANEL – LCD, knob, button

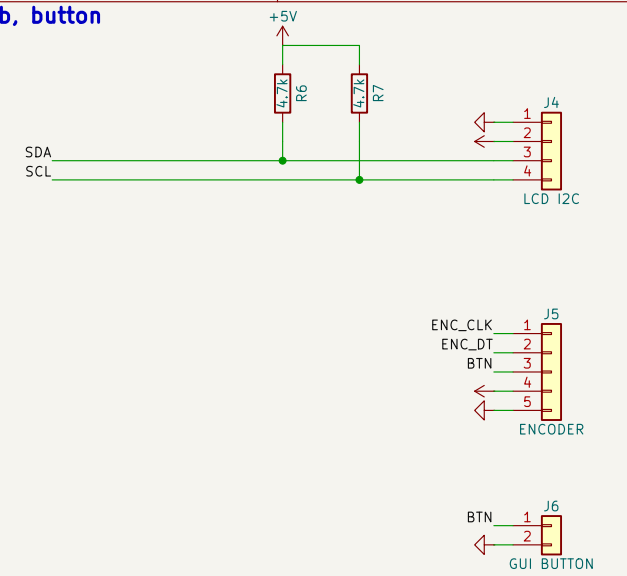


PROGRAMMING

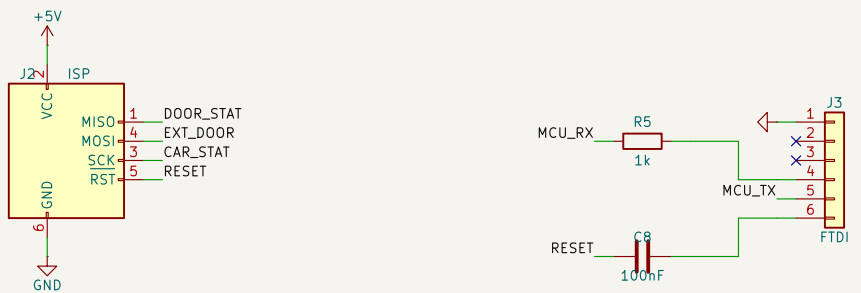


ESP8266 LINK – 3.3 V side

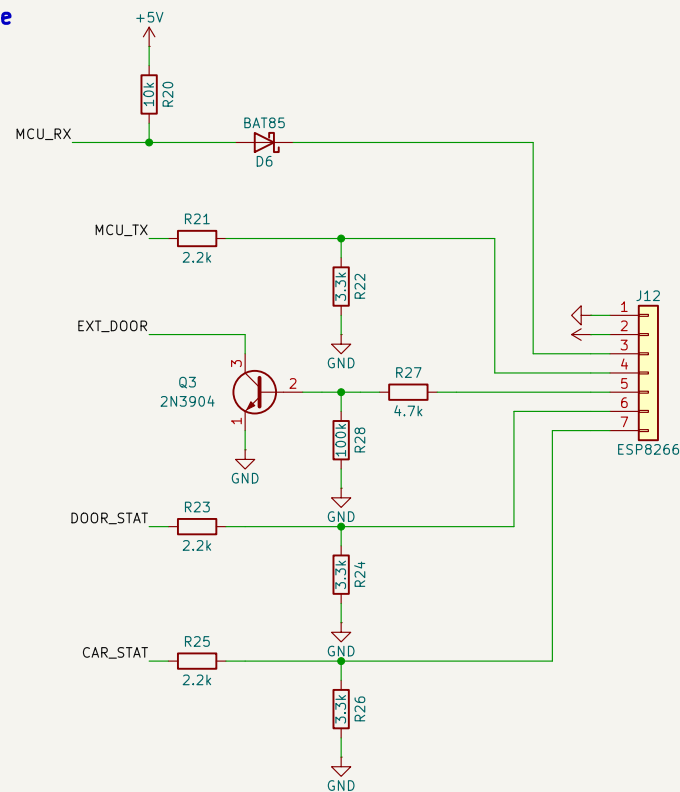

DOOR RELAY

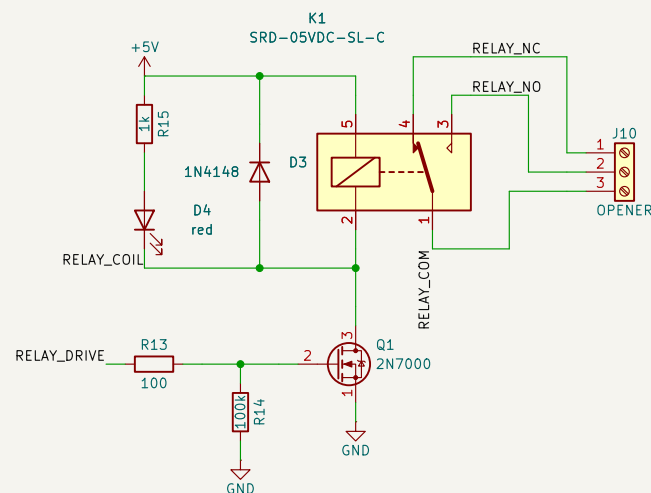

PARK ASSIST

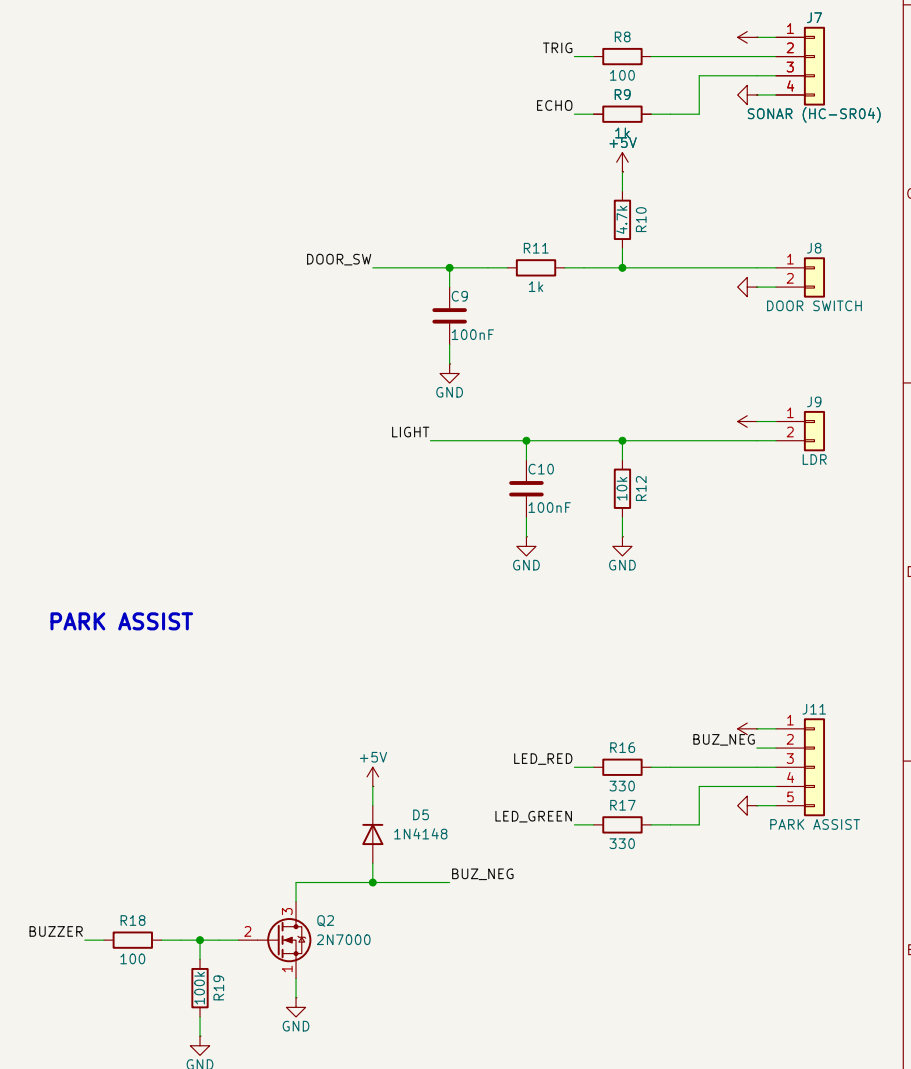

Uno pin mapping: Dn on the ATmega is the Uno's digital pin n, so Garage_Opener_Logicer_R6 runs unchanged.

Flash: burn the Uno (Optiboot) bootloader over J2 ISP once, then upload over J3 FTDI – or upload over ISP directly.

Unplug the ESP from J12 while uploading over FTDI: both use the UART. J3's VCC pin is not connected – power from USB-C.

ESP door request: drive J12 pin 5 HIGH to press the external door input (D11, active low with INPUT_PULLUP).

Through-hole except J1 (USB-C, 6 large SMD pads)
Barebones ATmega328P board for Garage_Opener_Logicer_R6

Sheet: /
File: garage_controller.kicad_sch

Title: Garage opener controller (R6)

Size: A3

Date: 2026-10-02

Rev: A

Id: 1/1