The beauty that is hauntingly mesmerizing, inspired from the coldest places

Cool colors, earthy tones that ground and gravitate you to a soothing piece of mind, our collection focuses on making your spaces feel elevated without even trying.

Product
Catalogue ‘26



Inspired by the effects of snowy landscapes, evergreen trees and foliage this collection plays with cool colors and contrasts.


Size & surface details

The 600x1200mm size, with available surfaces like Glossy, Glossy Seamless, Carving, Luxa and Velvet makes this Alaska collection an optimum choice for those who speak the language of subtle luxury.

A refined blend of understated luxury and soothing design.

With several surfaces available, Alaska comes with a charm that remains irresistible and evergreen just like the nature it draws its inspiration from.



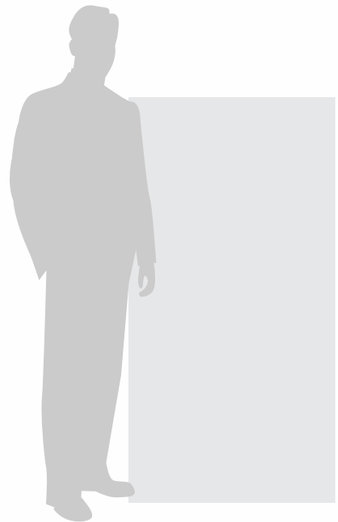

Size:
600x1200mm

Available Surfaces:
Glossy
Glossy Seamless
Carving
Luxa (Posh)
Velvet

Ultra-practical tiles

Our Ultra-Performing tiles redefine resilience and style, engineered to withstand heavy wear, resist scratches, stains, and moisture, while maintaining their pristine finish.

Lasting Durability

Crafted with advanced vitrification technology, these 600x1200mm tiles deliver exceptional structural strength and long-lasting performance.

Frost Resistant

Thanks to their vitrified composition and minimal water absorption, these tiles are frost-proof, making them suitable for a wide range of climates.

Hygienic Surface

The non-porous surface inhibits moisture uptake and grime build-up, allowing for effortless cleaning.

Fire Resistant

Engineered to withstand heat and thermal stress without degradation, these tiles offer inherent fire-resistant qualities.

Chemical Resistant

With finishes that resist common household chemicals. These tiles maintain their appearance and performance even when exposed to cleaning agents.

Easy Installation

The uniform size and calibrated edges of the 600x1200mm format enable faster, more precise laying with fewer grout joints.



With exceptional strength and low maintenance, they ensure long-term reliability, making them ideal for both residential and commercial applications.





Diverse utility

Our tiles offer diverse applications, seamlessly adapting to every corner of a space.

From contemporary residences to commercial hubs, industrial zones to airports, they deliver consistent performance and aesthetics. Their versatile designs, sizes, and finishes allow for creative layouts, striking patterns, and functional solutions, making them the perfect choice for transforming any environment with style, durability, and visual harmony.

Product
Catalogue ‘26

Applications

- Residential
- Hall & Corridor
- Commercial Building
- Religious Place
- Gymnasium
- Industry
- School & College
- Airport

CARRARA SNOW



SIZE:

600x1200mm

SURFACE

Glossy Seamless

Back to Index



RANDOM - 4



ARGENTA GREY

SIZE
600x1200mm

SURFACE
Glossy & Velvet

R-4










AVAILABLE COLORS:



Beige

Back to Index

MNC 004-OLISTER BIANCO

R-4

Size : **600x1200mm**
Finish : **Glossy**
Body : **GVT**

Back to Index

TOUCH FOR 360

SAND LIGHT

RUSTIC

04 RANDOM

1200 X
1200 MM



PREVIEW OF **SAND LIGHT**



TOUCH FOR 360

UNICO BEIGE

RUSTIC

03 RANDOM

1200 X
1200 MM



PREVIEW OF **UNICO BEIGE**









TOUCH FOR 360

UNICO GREY

RUSTIC

03 RANDOM

1200 X
1200 MM



PREVIEW OF **UNICO GREY**

TECHNICAL SPECIFICATIONS

CHARACTERISTIC	STANDARD A S PER ISO-13006 /2018 En14411 gr.bla	VALUE	TEST METHOD
Regulatory Properties			
Deviation in Length & Width	±0.5%	±0.2%	ISO 10545-2
Deviation in Thickness	±5%	±5%	ISO 10545-2
Straightness of Sides	±0.5%	±0.2%	ISO 10545-2
Rectangularity	±0.5%	±0.2%	ISO 10545-2
Surface Flatness	±0.5%	±0.3%	ISO 10545-2
Colour Difference	ΔE<1.00	ΔE<0.30	ISO 10545-16
Glossiness	As per Mfg.	As Per Mfg.	GlossMeter
Structural Properties			
Water Absorption	≤0.5 %	≤0.3 %	ISO 10545-3
Apparent Density	As Per Mfg.	>2.20 g/ cc	ISO 10545-3
Massive Mechanical Properties			
Modulus of Repture	Min.35N/mm^2	Min.40N/mm^2	ISO 10545-4
Breaking Strength	Min. 1300 N	Min. 2000 N	ISO 10545-4
Impact Resistance	As per Mfg.	Min. 0.55	ISO 10545-4
Surface Mechanical Properties			
Surface Abrasion Resistance	As per Mfg.	Min. class 3	ISO 10545-7
Moh's Hardness	As per Mfg.	Min. class 4	BS EN 15771
Thermo Hygrometric Properties			
Frost Resistance	As Per Mfg.	Frost Proof	ISO 10545-12
Thermal Shock Resistance	Min. 10 Cycle	Min. 10 Cycle	ISO 10545-9
Moisture Expansion	Max. 0.6mm/ m	Max. 0.02mm/ m	ISO 10545-10
Thermal Expansion	Max. 9.0 x 10^{-6}	Max. 6.0x10^{-6}	ISO 10545-8
Chemical Properties			
Chemical Resistance	As Per Mfg.	No Damage	ISO 10545-13
Stain Resistance	Resistant	Resistant	ISO 10545-14
Safety Properties			
Slip Resistance	As per Mfg.	N. A.	DIN 51130
Fire Resistance	As per Mfg.	Fire Proof	N. A.

PACKING DETAILS

PRODUCT	SIZE	THICKNESS	TILES / BOX	COVERAGE AREA / BOX	WEIGHT
	1200x1200 mm	9 mm	2 pcs	31 sq.ft / 2.88 sq.mtr	60 kgs (Approx)
	1000x1000 mm	9 mm	2 pcs	21.52 sq.ft / 2 sq.mtr	39 kgs (Approx)
	800x800 mm	9 mm	3 pcs	20.66 sq.ft / 1.92 sq.mtr	37 kgs (Approx)