
LESSON 4 • TERM 2 • LEVEL 1

Odd + Odd?

Odd + Odd: Always, Sometimes, Never?

TODAY WE WILL

Test a claim like a detective.

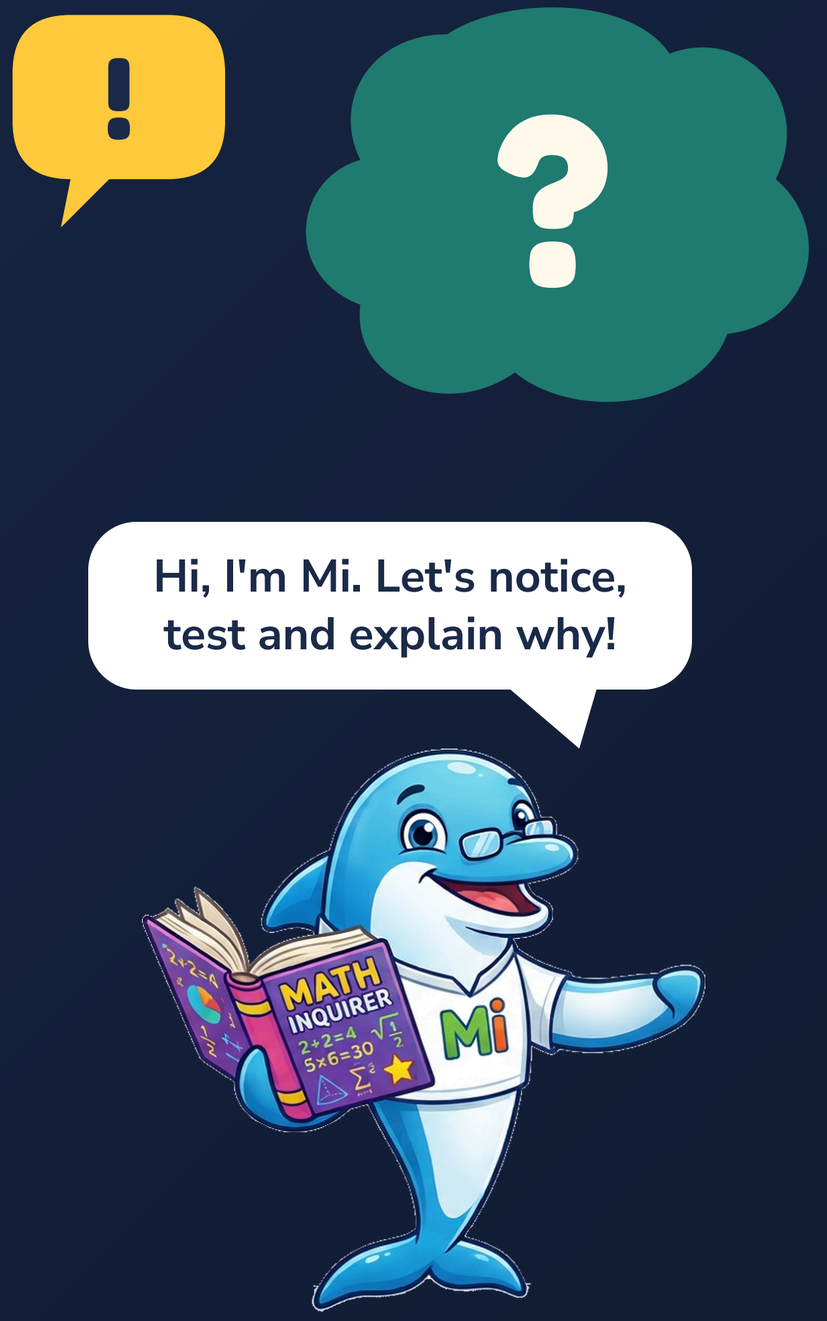

2–8 MIN

Warm-up: make pairs

Show it on your fingers




8 counters



5 counters

Is one counter left over? Flat hand for none, 1 finger for one.

8 | 5 | **10** | 7



Fingers ready? Let us go!

Count in twos

2–8 MIN


1	2	3	4	5	6	7	8	9	10
11	12	13	14	15	16	17	18	19	20

Count in twos: 2, 4, 6, 8 ...

after 10 **after 16** **before 8**

The last digit

2–8 MIN

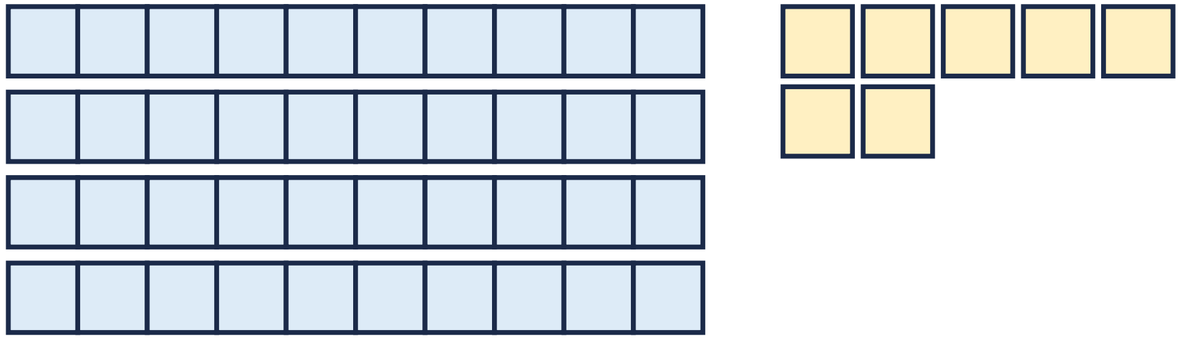

47 is 4 tens and 7 ones

The last digit of 47 is 7. It tells the ones.

38 **63** **90**

Sneak-peek puzzles

8–12 MIN

Ideas we have not learnt yet. A guess is a great start. Nobody is marked.

PUZZLE 1: anyone can try

Mei has 7 counters. She puts them in pairs.

How many counters are left over?

You may draw to help.

PUZZLE 2: think

Ben has 5 counters. Mei has 7 counters.

They put all their counters together and make pairs.

Is one counter left over? Circle Yes or No. Then write or draw how you know.

Explore: pair up


12–26 MIN

1. Take 6 counters. Put them in pairs.
2. Is one left over?
3. Take 7 counters. Put them in pairs.
4. Is one left over?
5. Try 8, 9 and 10.

Explore: pair up

12–26 MIN

1. Take 6 counters. Put them in pairs.
2. Is one left over?
3. Take 7 counters. Put them in pairs.
4. Is one left over?
5. Try 8, 9 and 10.



6: even



7: odd

Sort the number cards

12–26 MIN

Lay out your cards 1 to 20. Make two piles: even on the left, odd on the right.

1	2	3	4	5	6	7	8	9	10
11	12	13	14	15	16	17	18	19	20

Look at the last digits. What do you notice?

Be a detective: test the sums

12–26 MIN

3 + 5

3 + 4

4 + 6

Build each sum with counters first.

Be a detective: test the sums

12–26 MIN

3 + 5 **3 + 4** **4 + 6**

Sum	Make pairs. Odd or even?
3 + 5	8: even
3 + 4	7: odd
4 + 6	10: even

Build each sum with counters first.


What did we notice?

12–26 MIN

- Did odd + odd give an odd number?
- What happened with odd + even? With even + even?
- What could we test next?

Odd and even

26–39 MIN




6: even



7: odd

Odd and even

26–39 MIN



6: even



7: odd

Last digit	The number is
0, 2, 4, 6, 8	even
1, 3, 5, 7, 9	odd

Test a claim: odd + even

26–39 MIN

CLAIM

An odd number plus an even number is always odd.

Test	Total
3 + 4	7
5 + 8	13
7 + 2	9

One test can show a claim is false

26–39 MIN

CLAIM

An odd number plus an odd number is odd.

Always, sometimes or never?

One test can show a claim is false

26–39 MIN

CLAIM

An odd number plus an odd number is odd.

3 + 5 = 8. 8 is even. The claim is not always true.

Always, sometimes or never?

Test a claim: even + even

26–39 MIN

CLAIM

An even number plus an even number is always even.


4 + 6

8 + 2


10 + 10

Why? Draw the pairs

26–39 MIN

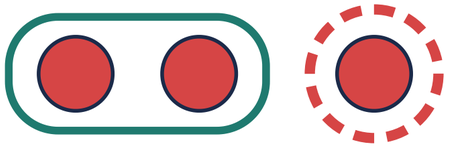


3: 1 left over




5: 1 left over

Why? Draw the pairs

26–39 MIN

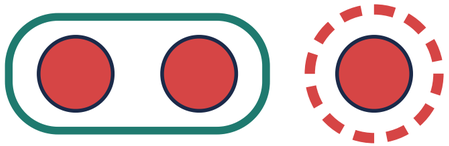

3: 1 left over



5: 1 left over

The 2 left-over counters make a pair. So 3 + 5 has none left over: even.

Your turn: odd or even?

26–39 MIN

Write the total, then odd or even.

4 + 9	6 + 8	7 + 5	12 + 3

Check: odd or even?

26–39 MIN

Sum	Total	Odd or even?
4 + 9	13	odd
6 + 8	14	even
7 + 5	12	even
12 + 3	15	odd

39–43 MIN

Clap or tap

I say a number. Even: clap twice. Odd: tap your knees once.

Say odd or even out loud.

Stand up. Sip some water.

Workbook page 1: Start here

43–71 MIN

Questions 1 to 3. Take your time.

S1 Look at the pairs. Fill in the missing numbers.



S2 Pair up counters or draw dots in pairs. Circle Odd or Even for each number.

S3 Count in 2s. Colour each number you say. Then fill in the missing number.

Check page 1

43–71 MIN

S1	6 counters: 0 left over; 7 counters: 1 left over
S2	4 even; 9 odd; 10 even; 13 odd
S3	The last digits are 2, 4, 6, 8 and 0


Workbook page 2: Start here

43–71 MIN

Questions 4 to 6. Take your time.

S4 Which number is even? Write its number in the bracket.

S5 Look at the 11 counters in pairs. Fill in the blank. Then circle Odd or Even.



S6 Read each statement. Decide if it is True or False.

Check page 2

43–71 MIN

S4	(3) 14
S5	1 counter has no partner; 11 is odd
S6	True, False, True, False

43–71 MIN

Choose your next page

Page	What it is
Think harder (page 3)	Test claims with sums
Go further (page 4)	Draw why it works
Investigation (page 5)	Numbers next to each other
Check	Finish and check your own work

Everyone may choose. Not finished? Pages 3 to 5 are for home too.

Talk and explain

71–77 MIN

RAVI TESTS 3 + 5

He gets 8.


He says: odd + odd is always even.

Is one test enough? What could we do to be more sure?

I think … because …

Back to the sneak-peek

71–77 MIN



5



7

No! The 2 left-over counters make a pair.

Exit ticket

77–83 MIN

On your own. No looking back.

E1 Is 17 odd or even? Circle Odd or Even.

17 is

E2 Which number is even? Write its number in the bracket.

E3 Can you make 14 by adding two odd numbers? Circle Yes or No.

14

Check the exit ticket

77–83 MIN

E1	Odd
E2	(3) 18
E3	Yes


Look-back

83–86 MIN

Three minutes. There are no right answers. You can pass. Nobody reads it out.

Something I did well	write or draw one thing
The hardest part was …	☐ telling odd from even ☐ testing the sums ☐ always, sometimes or never ☐ drawing the pairs (Go further) ☐ something else
What helped me	☐ counters in pairs ☐ drawing it ☐ trying again ☐ I asked for help ☐ I was not stuck
Next time I will try	☐ drawing it ☐ using objects ☐ checking my answer ☐ asking a question
	☐ I am still stuck (my grown-up will photograph this page for my tutor) ☐ I would like to pass

Take your time. You can pass.



86–90 MIN


Well done, inquirers!

Show a grown-up one thing you found out today.

NEXT LESSON

Equal Groups

Have ready: 4 plates or bowls, about 20 small things of one kind, pencil and paper.

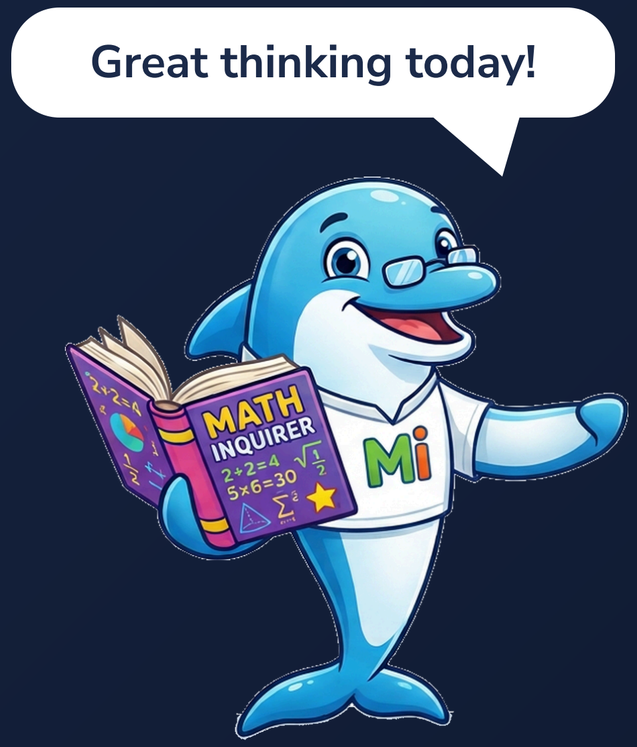

Go further: what if?

OPTIONAL

Ali says he can make 15 by adding two odd numbers. Can he?

Try	Total
7 + 7	14
5 + 9	14
7 + 9	16

OPTIONAL

If we have time: pick one

Activity	What we do
Is it always true?	Even + even is even. Test it three times.
Make a puzzle	Write three sums. Ask your grown-up: odd or even, before adding?
Teach it back	Show with pairs why 7 + 9 is even

Optional. Everyone may join.