



AGV Control Strategy Benchmark - Cross-Scenario Summary

Velocity tracking RMSE (m/s)
lower is better | dashed = engineered winner

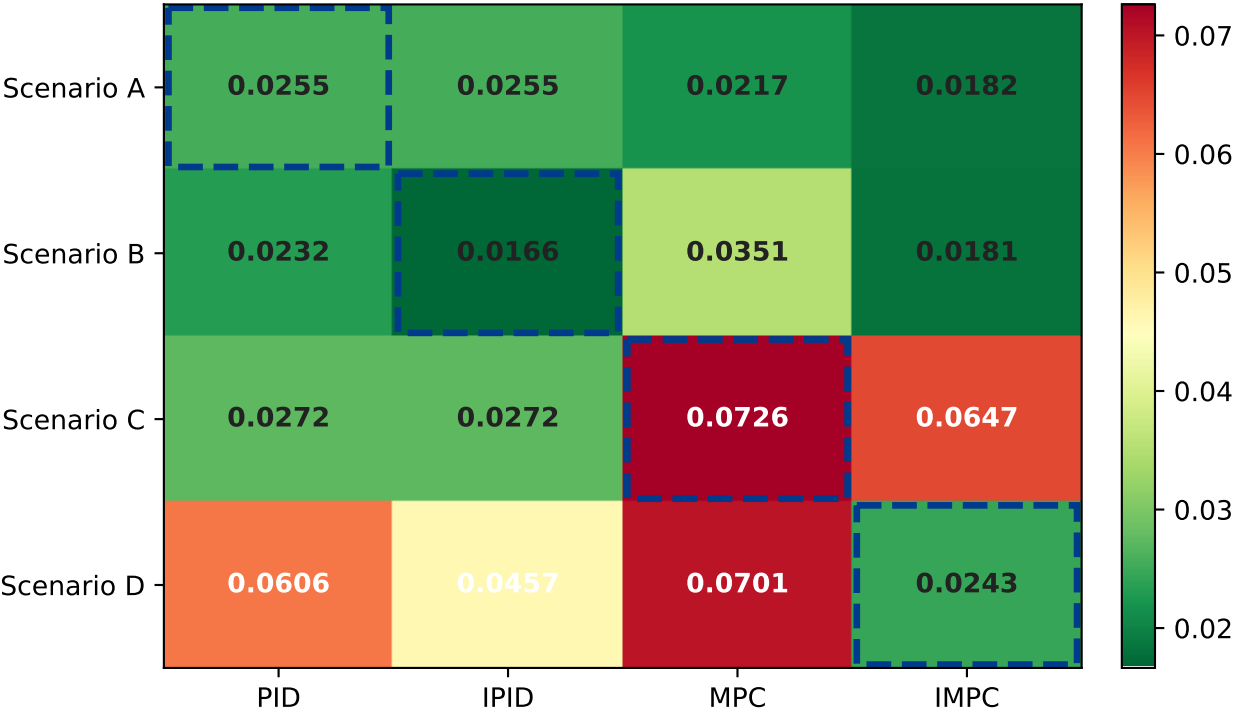

Mean compute per controller tick
lower is better | log colour scale

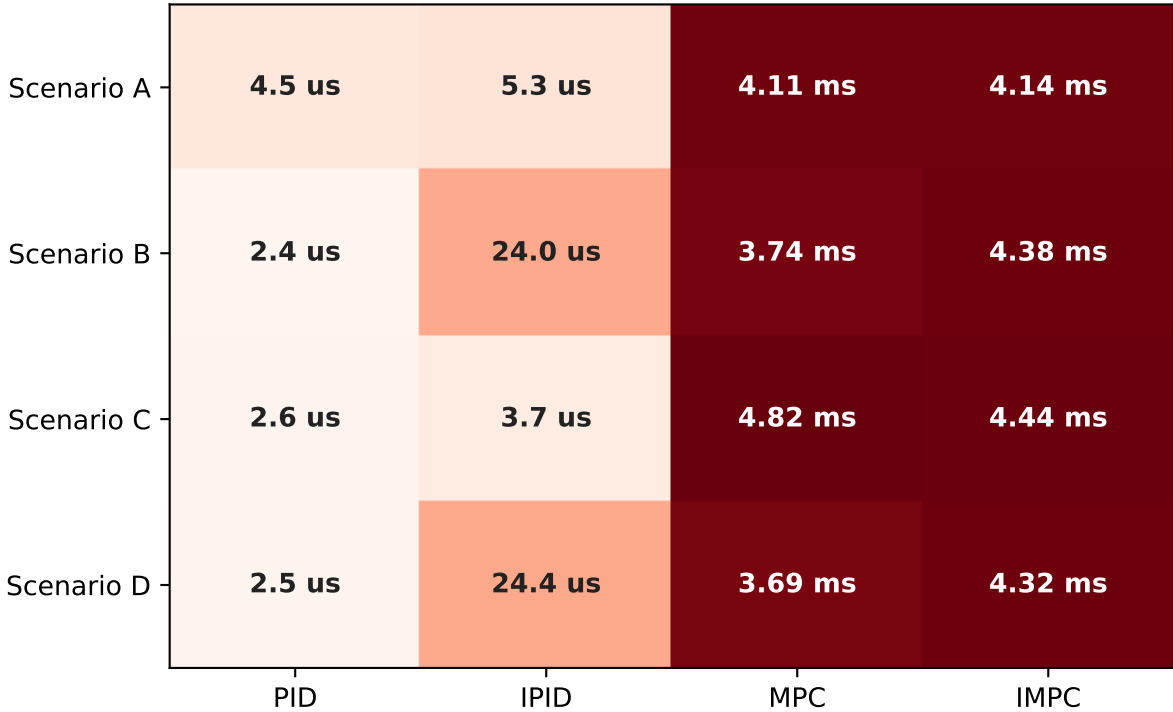

Scenario A: PID wins on lowest compute per tick at competitive RMSE.
compute = 4.5 us/tick.
Scenario B: IPID wins on lowest velocity RMSE under varying surface+payload.
RMSE = 0.0166 m/s
Scenario C: MPC wins on parks within +/-5 cm of the dock.
err = -1.4 cm [PASS]
Scenario D: IMPC wins on lowest velocity RMSE on the combined disturbance.
RMSE = 0.0243 m/s