

Ignition System Maintenance

1. Magneto inspection

The magneto generates the high voltage that fires the spark plugs. Inspect the breaker points every 100 hours and check the timing against the engine data plate.

Part	Code	Torque (N·m)	Interval
Spark plug 1	SP-001	21	200 h
Spark plug 2	SP-002	22	300 h
Spark plug 3	SP-003	23	400 h
Spark plug 4	SP-004	24	100 h

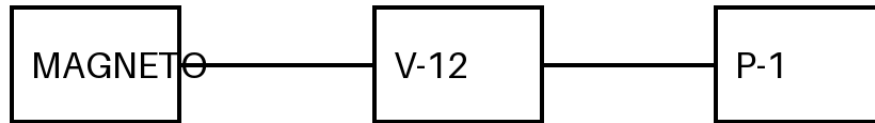


Figure 1. Magneto primary circuit with valve V-12 and pump P-1.

Replace any component whose resistance falls outside the limits listed in the table above.