


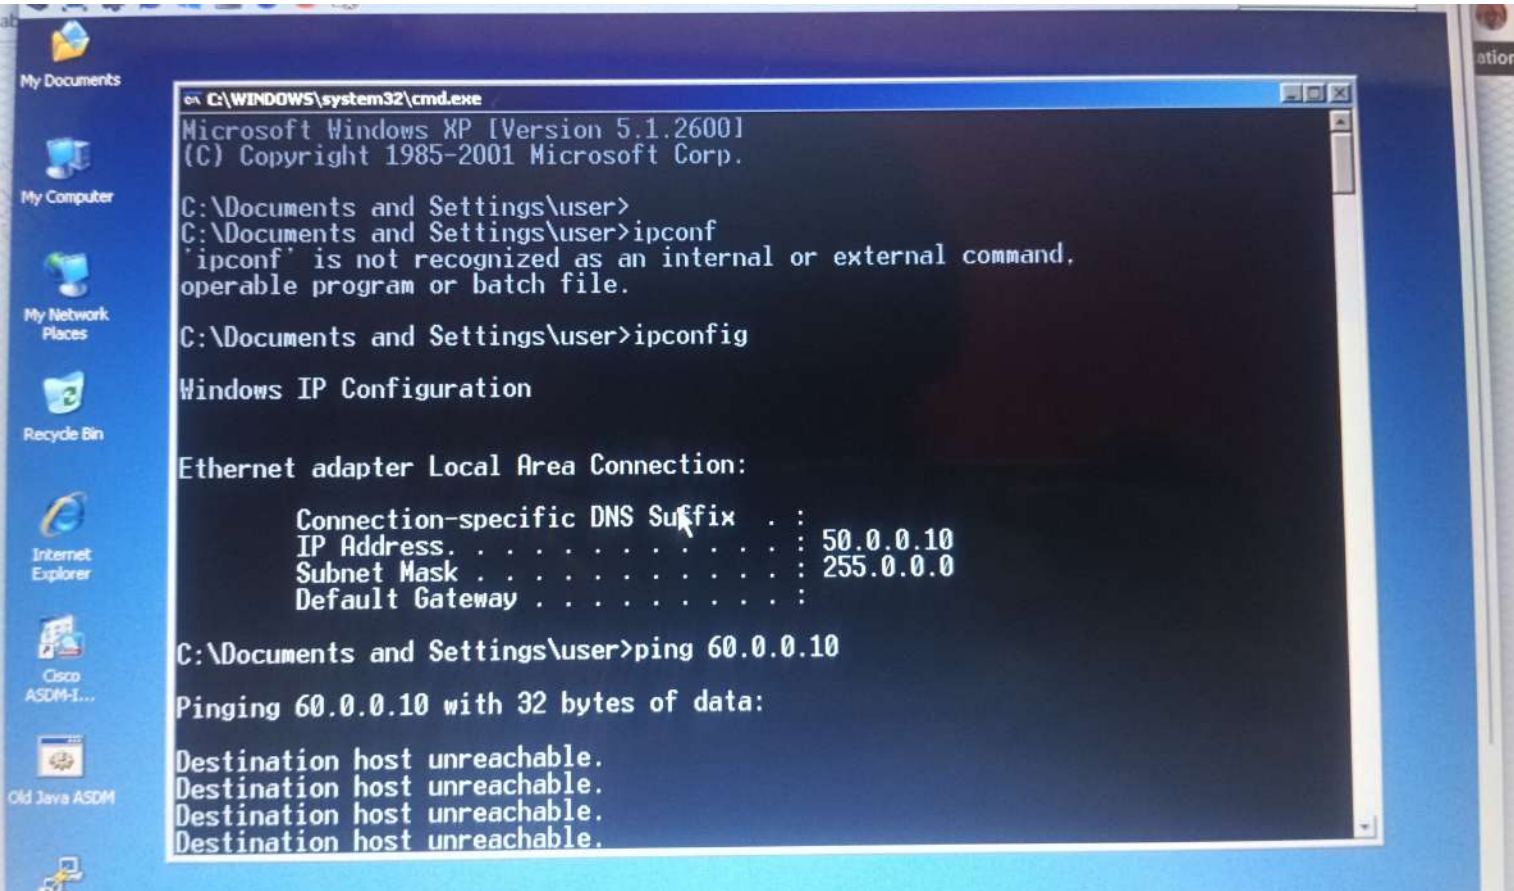

Putty (inactive)

```
L 50.0.0.1/32 is directly connected, Ethernet0/1
Router#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

50.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    50.0.0.0/8 is directly connected, Ethernet0/0
L    50.0.0.1/32 is directly connected, Ethernet0/0
60.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    60.0.0.0/8 is directly connected, Ethernet0/1
L    60.0.0.1/32 is directly connected, Ethernet0/1
Router#
Router#
Router#
Router#
```

```
C:\Documents and Settings\user>route add 50.0.0.0 mask 255.0.0.0 60.0.0.1
```

```
C:\Documents and Settings\user>route print
```

```
=====
```

Interface List

```
0x1 ..... MS TCP Loopback interface
0x2 ...50 86 5f 09 50 00 ..... Intel(R) PRO/1000 MT Network Connection - Packet Scheduler Miniport
=====
```

```
=====
```

Active Routes:

Network	Destination	Netmask	Gateway	Interface	Metric
	50.0.0.0	255.0.0.0	60.0.0.1	60.0.0.10	1
	60.0.0.0	255.0.0.0	60.0.0.10	60.0.0.10	10
	60.0.0.10	255.255.255.255	127.0.0.1	127.0.0.1	10
60.	255.255.255	255.255.255.255	60.0.0.10	60.0.0.10	10
	127.0.0.0	255.0.0.0	127.0.0.1	127.0.0.1	1
	224.0.0.0	240.0.0.0	60.0.0.10	60.0.0.10	10
255.	255.255.255	255.255.255.255	60.0.0.10	60.0.0.10	1

```
=====
```

Persistent Routes:

None

```
C:\Documents and Settings\user>ip config
```

'ip' is not recognized as an internal or external command.

```
255.255.255.255 255.255.255.255 50.0.0.10 50.0.0.10 10
=====
```

Persistent Routes:
None

C:\Documents and Settings\user>route add 60.0.0.0 mask 255.0.0.0 50.0.0.1

C:\Documents and Settings\user>route print

=====

Interface List

0x1 MS TCP Loopback interface
0x2 ...50 fe 9c 09 4f 00 Intel(R) PRO/1000 MT Network Connection - Packet
Scheduler Miniport

=====

Active Routes:

Network	Destination	Netmask	Gateway	Interface	Metric
	50.0.0.0	255.0.0.0	50.0.0.10	50.0.0.10	10
	50.0.0.10	255.255.255.255	127.0.0.1	127.0.0.1	10
50.	255.255.255.255	255.255.255.255	50.0.0.10	50.0.0.10	10
	60.0.0.0	255.0.0.0	50.0.0.1	50.0.0.10	1
	127.0.0.0	255.0.0.0	127.0.0.1	127.0.0.1	1
	224.0.0.0	240.0.0.0	50.0.0.10	50.0.0.10	10
255.	255.255.255.255	255.255.255.255	50.0.0.10	50.0.0.10	1

=====

Persistent Routes:

None

C:\Documents and Settings\user>route print

=====

Interface List

0x1 MS TCP Loopback interface
0x2 ...50 fe 9c 09 4f 00 Intel(R) PRO/1000 MT Network Connection - Pack
Scheduler Miniport

=====

Active Routes:

Network	Destination	Netmask	Gateway	Interface	Metric
	50.0.0.0	255.0.0.0	50.0.0.10	50.0.0.10	10
	50.0.0.10	255.255.255.255	127.0.0.1	127.0.0.1	10
50.255.255.255	255.255.255.255	255.255.255.255	50.0.0.10	50.0.0.10	10
	127.0.0.0	255.0.0.0	127.0.0.1	127.0.0.1	1
	224.0.0.0	240.0.0.0	50.0.0.10	50.0.0.10	10
255.255.255.255	255.255.255.255	255.255.255.255	50.0.0.10	50.0.0.10	1

=====

Persistent Routes:

None

C:\Documents and Settings\user>

```
My Documents
My Computer
My Network Places
Recycle Bin
Internet Explorer
Cisco ASDM-I...
Old Java ASDM

C:\WINDOWS\system32\cmd.exe
C:\Documents and Settings\user>
C:\Documents and Settings\user>ncpa.cpl
C:\Documents and Settings\user>route print
=====
Interface List
0x1 ..... MS TCP Loopback interface
0x2 ...50 fe 9c 09 4f 00 ..... Intel(R) PRO/1000 MT Network Connection - Packet Scheduler Miniport
=====
Active Routes:
Network Destination        Netmask          Gateway          Interface        Metric
0.0.0.0                    0.0.0.0          50.0.0.1        50.0.0.10        10
50.0.0.0                    255.0.0.0        50.0.0.10       50.0.0.10        10
50.0.0.10                  255.255.255.255  127.0.0.1       127.0.0.1        10
50.255.255.255             255.255.255.255  50.0.0.10       50.0.0.10        10
127.0.0.0                  255.0.0.0        127.0.0.1       127.0.0.1        1
224.0.0.0                  240.0.0.0        50.0.0.10       50.0.0.10        10
255.255.255.255           255.255.255.255  50.0.0.10       50.0.0.10        1
Default Gateway:          50.0.0.1
=====
Persistent Routes:
None
C:\Documents and Settings\user>
```

```
on C:\WINDOWS\system32\cmd.exe
0.0.0.0      0.0.0.0      50.0.0.1      50.0.0.10      10
50.0.0.0      255.0.0.0      50.0.0.10      50.0.0.10      10
50.0.0.10      255.255.255.255  127.0.0.1      127.0.0.1      10
50.255.255.255  255.255.255.255  50.0.0.10      50.0.0.10      10
127.0.0.0      255.0.0.0      127.0.0.1      127.0.0.1      1
224.0.0.0      240.0.0.0      50.0.0.10      50.0.0.10      10
255.255.255.255  255.255.255.255  50.0.0.10      50.0.0.10      1
Default Gateway: 50.0.0.1
=====
Persistent Routes:
None
C:\Documents and Settings\user>
C:\Documents and Settings\user>ping 60.0.0.10

Pinging 60.0.0.10 with 32 bytes of data:
Reply from 60.0.0.10: bytes=32 time=1ms TTL=127
Reply from 60.0.0.10: bytes=32 time=1ms TTL=127
Reply from 60.0.0.10: bytes=32 time=1ms TTL=127
Reply from 60.0.0.10: bytes=32 time=1ms TTL=127

Ping statistics for 60.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 1ms, Average = 1ms
C:\Documents and Settings\user>
```