


!!!!!! Neenga kudutha fees !!!!!

10,000 RS

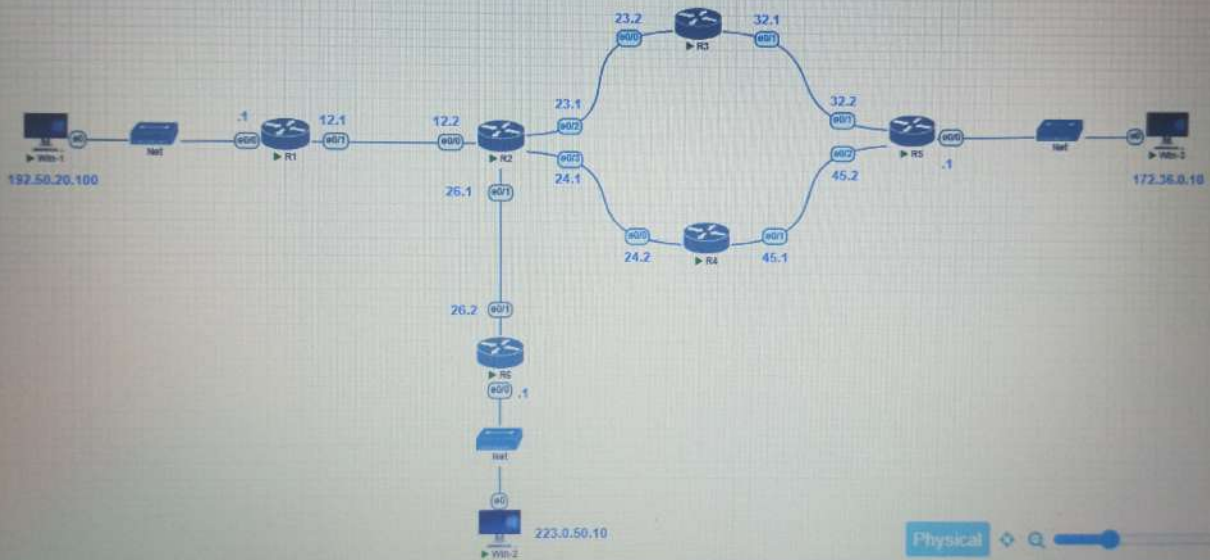

Physical

01:00:00 START



1 - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

12.0.0.0/8 is variably subnetted, 2 subnets, 2 masks

C 12.0.0.0/8 is directly connected, Ethernet0/1

L 12.0.0.1/32 is directly connected, Ethernet0/1

S 23.0.0.0/8 [1/0] via 12.0.0.2

S 24.0.0.0/8 [1/0] via 12.0.0.2

S 26.0.0.0/8 [1/0] via 12.0.0.2

S 32.0.0.0/8 [1/0] via 12.0.0.2

S 45.0.0.0/8 [1/0] via 12.0.0.2

S 172.36.0.0/16 [1/0] via 12.0.0.2

192.50.20.0/24 is variably subnetted, 2 subnets, 2 masks

C 192.50.20.0/24 is directly connected, Ethernet0/0

L 192.50.20.1/32 is directly connected, Ethernet0/0

S 223.0.50.0/24 [1/0] via 12.0.0.2

R1#

R1#

R1#

26.2 (e0/1)

32.1

(e0/1)

3

(e0/1)

4

(e0/1)

45.1

(e0/1)

4

(e0/1)

45.1

(e0/1)

45.1

(e0/1)

45.1

(e0/1)

45.1

(e0/1)

45.1

(e0/1)

45.1

(e0/1)

45.1

(e0/1)

45.1

(e0/1)

45.1

(e0/1)

45.1

(e0/1)

45.1

(e0/1)

45.1

(e0/1)

45.1

(e0/1)

45.1

(e0/1)

45.1

(e0/1)

45.1

```
R2
a - application route
- - replicated route, & - next hop override, p - overrides from PDR

Gateway of last resort is not set

12.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    12.0.0.0/8 is directly connected, Ethernet0/0
L    12.0.0.2/32 is directly connected, Ethernet0/0
23.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    23.0.0.0/8 is directly connected, Ethernet0/2
L    23.0.0.1/32 is directly connected, Ethernet0/2
24.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    24.0.0.0/8 is directly connected, Ethernet0/3
L    24.0.0.1/32 is directly connected, Ethernet0/3
26.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    26.0.0.0/8 is directly connected, Ethernet0/1
L    26.0.0.1/32 is directly connected, Ethernet0/1
S    32.0.0.0/8 [1/0] via 23.0.0.2
S    45.0.0.0/8 [1/0] via 24.0.0.2
S    172.36.0.0/16 [1/0] via 23.0.0.2
S    192.50.20.0/24 [1/0] via 12.0.0.1
S    223.0.50.0/24 [1/0] via 26.0.0.2
R2#
R2#
```



```
R3
! - CIP, F - periodic downloaded static route, R - RRRP, * - 1
!
a - application route
- - replicated route, & - next hop override, p - overrides from
m BFR

Gateway of last resort is not set

S 12.0.0.0/8 [1/0] via 23.0.0.1
C 23.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L 23.0.0.0/8 is directly connected, Ethernet0/0
L 23.0.0.2/32 is directly connected, Ethernet0/0
S 24.0.0.0/8 [1/0] via 23.0.0.1
S 26.0.0.0/8 [1/0] via 23.0.0.1
C 32.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 32.0.0.0/8 is directly connected, Ethernet0/1
L 32.0.0.1/32 is directly connected, Ethernet0/1
S 45.0.0.0/8 [1/0] via 32.0.0.2
S 172.36.0.0/16 [1/0] via 32.0.0.2
S 192.50.20.0/24 [1/0] via 23.0.0.1
S 223.0.50.0/24 [1/0] via 23.0.0.1
R3#
R3#
R3#
```


R4

la - IS-IS inter area, * - candidate default, U - pe
r-user static route
o - ODR, P - periodic downloaded static route, H - N
HRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - ove
rrides from PFR

Gateway of last resort is not set

S 12.0.0.0/8 [1/0] via 24.0.0.1
S 23.0.0.0/8 [1/0] via 24.0.0.1
24.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 24.0.0.0/8 is directly connected, Ethernet0/0
L 24.0.0.2/32 is directly connected, Ethernet0/0
S 26.0.0.0/8 [1/0] via 24.0.0.1
S 32.0.0.0/8 [1/0] via 45.0.0.2
45.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 45.0.0.0/8 is directly connected, Ethernet0/1
L 45.0.0.1/32 is directly connected, Ethernet0/1
S 172.36.0.0/16 [1/0] via 45.0.0.2
S 192.50.20.0/24 [1/0] via 24.0.0.1
S 223.0.50.0/24 [1/0] via 24.0.0.1

R4#

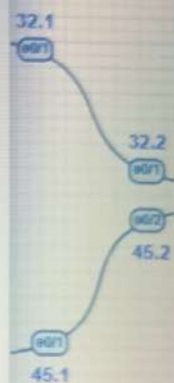


Net

90


```
R5
a - application route
- - replicated route, % - next hop override, p - overrides from PFR

Gateway of last resort is not set


S    12.0.0.0/8 [1/0] via 32.0.0.1
S    28.0.0.0/8 [1/0] via 32.0.0.1
S    24.0.0.0/8 [1/0] via 45.0.0.1
S    26.0.0.0/8 [1/0] via 45.0.0.1
    32.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    32.0.0.0/8 is directly connected, Ethernet0/1
L    32.0.0.2/32 is directly connected, Ethernet0/1
    45.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    45.0.0.0/8 is directly connected, Ethernet0/2
L    45.0.0.2/32 is directly connected, Ethernet0/2
    172.36.0.0/16 is variably subnetted, 2 subnets, 2 masks
C    172.36.0.0/16 is directly connected, Ethernet0/0
L    172.36.0.1/32 is directly connected, Ethernet0/0
S    192.50.20.0/24 [1/0] via 32.0.0.1
S    223.0.50.0/24 [1/0] via 45.0.0.1
R5#
R5#
```

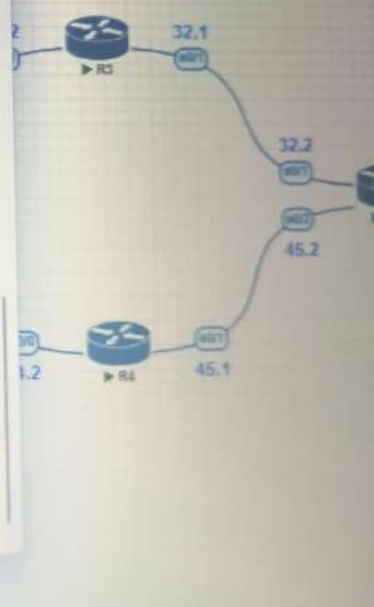

```
R6
RRR, 1 - 1134
a - Application route
- - replicated route, % - next hop override, p - c
overrides from PIR

Gateway of last resort is not set

S    12.0.0.0/8 [1/0] via 26.0.0.1
S    23.0.0.0/8 [1/0] via 26.0.0.1
S    24.0.0.0/8 [1/0] via 26.0.0.1
    26.0.0.0/8 is variably subnetted, 2 subnets, 2 mask
S
C    26.0.0.0/8 is directly connected, Ethernet0/1
L    26.0.0.2/32 is directly connected, Ethernet0/1
S    32.0.0.0/8 [1/0] via 26.0.0.1
S    45.0.0.0/8 [1/0] via 26.0.0.1
S    172.36.0.0/16 [1/0] via 26.0.0.1
S    192.50.20.0/24 [1/0] via 26.0.0.1
    223.0.50.0/24 is variably subnetted, 2 subnets, 2 m
asks
C    223.0.50.0/24 is directly connected, Ethernet0/0
L    223.0.50.1/32 is directly connected, Ethernet0/0
R6#
R6#
```

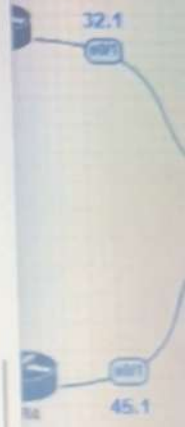

C:\WINDOWS\system32\cmd.exe

Pinging 192.50.20.1 with 32 bytes of data:

Reply from 192.50.20.1: bytes=32 time=1ms TTL=255
Reply from 192.50.20.1: bytes=32 time=1ms TTL=255
Reply from 192.50.20.1: bytes=32 time=1ms TTL=255
Reply from 192.50.20.1: bytes=32 time=1ms TTL=255

Ping statistics for 192.50.20.1:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\Documents and Settings\user>ping 223.0.50.10


Pinging 223.0.50.10 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 223.0.50.10:

Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\Documents and Settings\user>

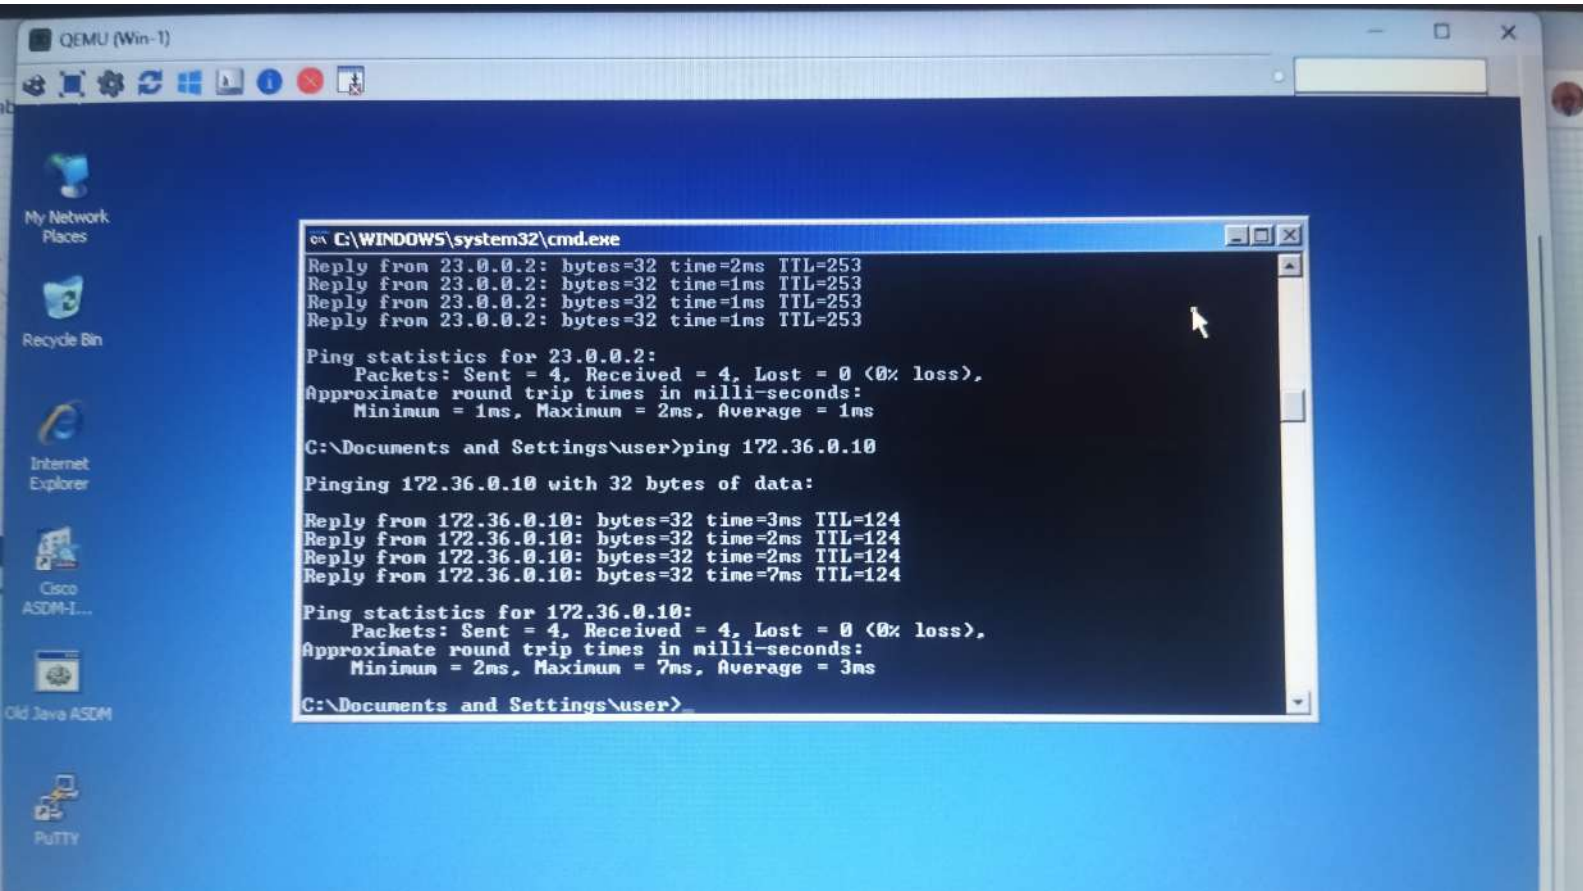

C:\WINDOWS\system32\cmd.exe

Windows IP Configuration

Ethernet adapter Local Area Connection:

Connection-specific DNS Suffix . :
IP Address : 172.36.0.10
Subnet Mask : 255.255.0.0
Default Gateway : 172.36.0.1

C:\Documents and Settings\user>ping 192.50.20.100

Pinging 192.50.20.100 with 32 bytes of data:

Reply from 192.50.20.100: bytes=32 time=1ms TTL=124
Reply from 192.50.20.100: bytes=32 time=1ms TTL=124
Reply from 192.50.20.100: bytes=32 time=2ms TTL=124
Reply from 192.50.20.100: bytes=32 time=5ms TTL=124

Ping statistics for 192.50.20.100:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 5ms, Average = 2ms

C:\Documents and Settings\user>