



PRODUCT PHOTO — MOAS STAINLESS CABINET, WALL-MOUNTED;
INSET OF ATOMIZING NOZZLE IN DUCT

Molitron Odor Abatement System

Odors neutralized at the molecular level. Not masked. Gone.

Self-contained, wall-mounted odor and smoke neutralization for commercial kitchens and any odor-sensitive exhaust — running on nothing more than a standard circuit and a ¼" water line.

95%

ODOR PARTICLE REDUCTION

6,000

CFM PER TWO-NOZZLE SYSTEM

ETL

LISTED & SAFETY TESTED

Perfume wears off. Neutralization doesn't.

Masking agents fight odor with fragrance — layering something pleasant over something offensive and hoping neighbors don't notice. The MOAS works differently.

It atomizes a neutralizing solution directly into the exhaust airstream, where chemical neutralization changes the molecular structure of odor particles — absorbing and converting malodors instead of covering them up. The result: up to 95% of offensive odor particles and up to 50% of smoke particles eliminated before your exhaust reaches the neighborhood.

How It Works

1

Dilute

The system automatically dilutes MOAS concentrate to the strength your specific odor load requires — tuned once, then hands-off.

2


Atomize

Remote nozzles inject the solution as a fine mist into the exhaust airstream, as close to the contaminant source as possible.

3

Neutralize

The mist mixes with the air in the duct run, converting odor molecules before discharge. Ten feet of duct or more past the nozzle gives full dwell time for maximum results.

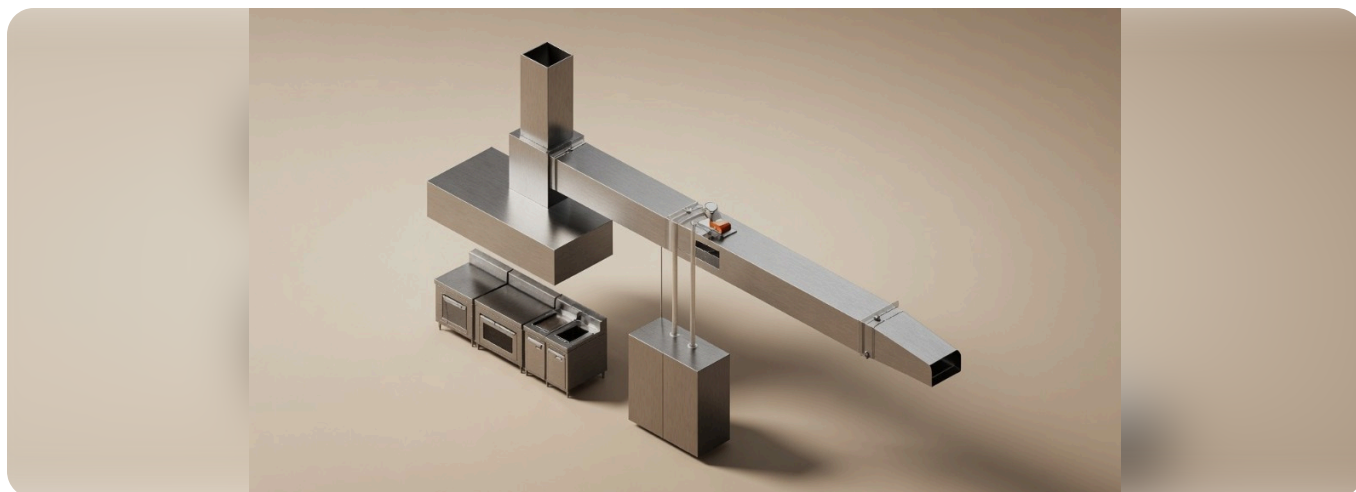

Typical installation — the MOAS cabinet feeds an atomizing nozzle mounted in the exhaust duct run between hood and discharge.

STRAIGHT TALK ON SMOKE

Smoke reduction varies with your cooking process and hood grease-removal efficiency. Our engineers will assess your setup and tell you exactly what to expect — before you buy.

Why operators choose MOAS



Genuinely Effective

Chemical neutralization converts malodors at the source — up to 95% odor reduction, verified in the field.



Minimal Utilities, Easy Install

115 VAC and a ¼" cold water line. All components live in one wall-mounted stainless cabinet — only the nozzles go in the duct.



Flexible by Design

Runs standalone, or integrates with the Enviro-Clean Air Scrubber and Enviro-Pak Filter Assembly for total smoke and odor control.



Safety Certified

ETL Listed and tested to UL 197 and UL 710 Clause 43 — including fire and leakage testing of hood-penetration fittings.



Refill Alerts, Not Odor Complaints

With the optional 10-gallon solution container, an audible alarm sounds when less than 2 gallons remain — refills happen on your schedule, not after the complaints resume.

Trusted by names you know

RITZ-CARLTON	CHICK-FIL-A	CHIPOTLE
BURGER KING	HAIDILAO	LAZY DOG
ALEXANDER'S STEAK HOUSE	LUNA GRILL	DISTRICT TACO
COOPER'S PIT BAR-B-QUE	FARMER'S TABLE	ROKO AKOR
LITTLE ITALY	MIKE'S BBQ	AMERICAN GRIND
MORNING GLORY	UNCLE	OSSO
REGRUB (CANADA)		

A selection of recent MOAS installations across North America.

Technical Specifications

Performance

Capacity	Up to 6,000 CFM per system (two misting nozzles)
Odor particle reduction	Up to 95%
Smoke particle reduction	Up to 50% (varies with cooking process and hood efficiency)
Method	Atomized chemical neutralization — molecular conversion, not masking
Dosing	Automatic concentrate dilution; output tuned at the solution injector to site load

MOAS Cabinet

Construction	18 Ga stainless steel, wall-mounted
Dimensions	24" W × 32" H × 8" D
Weight	~100 lbs
Contents	All system components except remote atomizing nozzles

Optional Solution Container

Capacity	10 gallons, with low-level audible alarm (sounds below 2 gallons)
Construction	16 Ga stainless steel, wall-mounted, sliding fill lid
Dimensions	24" W × 12" H × 8" D
Weight	20 lbs empty / 100 lbs full

Utilities & Connections

Electrical	115 VAC, 15 A circuit
Water	¼" cold water supply (80 PSI)
Liquid line to nozzles	¼" OD hose
Air line to nozzles	⅜" OD hose

Specifications subject to change without notice.

Getting the most from your MOAS

Nozzle Placement



DUCT RUN — NOZZLE POSITION, 10-FT MINIMUM DWELL DISTANCE
TO DISCHARGE, CABINET ON WALL BELOW

- Locate atomizing nozzles **as close to the contaminant source as possible** — maximizing contact with odor and smoke particles.
- Maintain a **minimum of 10 feet of duct** between the nozzle and the point of atmospheric discharge. Longer runs increase efficiency: more dwell time, more complete neutralization, less concentrate consumed.

Standalone

The complete odor solution for operations where odor — not visible smoke — is the primary complaint. One cabinet, two utility connections, done.

Integrated

Paired with the Enviro-Clean Air Scrubber or Enviro-Pak Filter Assembly, MOAS handles the odors filters can't catch — the final layer in a total pollution control system.

Compliance



ETL Listed, tested to:

UL 197 — Commercial Electric Cooking Appliances

UL 710, Clause 43 — Fire and Leakage Test of Fittings for Hood Penetrations

Why Molitron

Chemistry that works, honestly sold.

We tell you what MOAS will and won't do for your specific operation — then tune it until it delivers.

One system family.

MOAS, the Enviro-Clean Air Scrubber, and Enviro-Pak Filter Assemblies are engineered to work together — scale from odor control to total pollution control without changing vendors.

Proven where it counts.

From Ritz-Carlton kitchens to high-volume BBQ pits, MOAS runs in some of the most odor-challenging foodservice environments in North America.

Biodegradable chemistry.

The MOAS neutralizer solution is biodegradable — effective abatement without an environmental trade-off.

Stop the complaints. Keep the kitchen.

- **Request a Quote** cleanair@molitron.com
- **Talk Through Your Site** 303.969.8888
- **See the Full System** molitron.com

Molitron Co Inc · Arvada, Colorado

© 2026 Molitron Company. Specifications subject to change without notice.