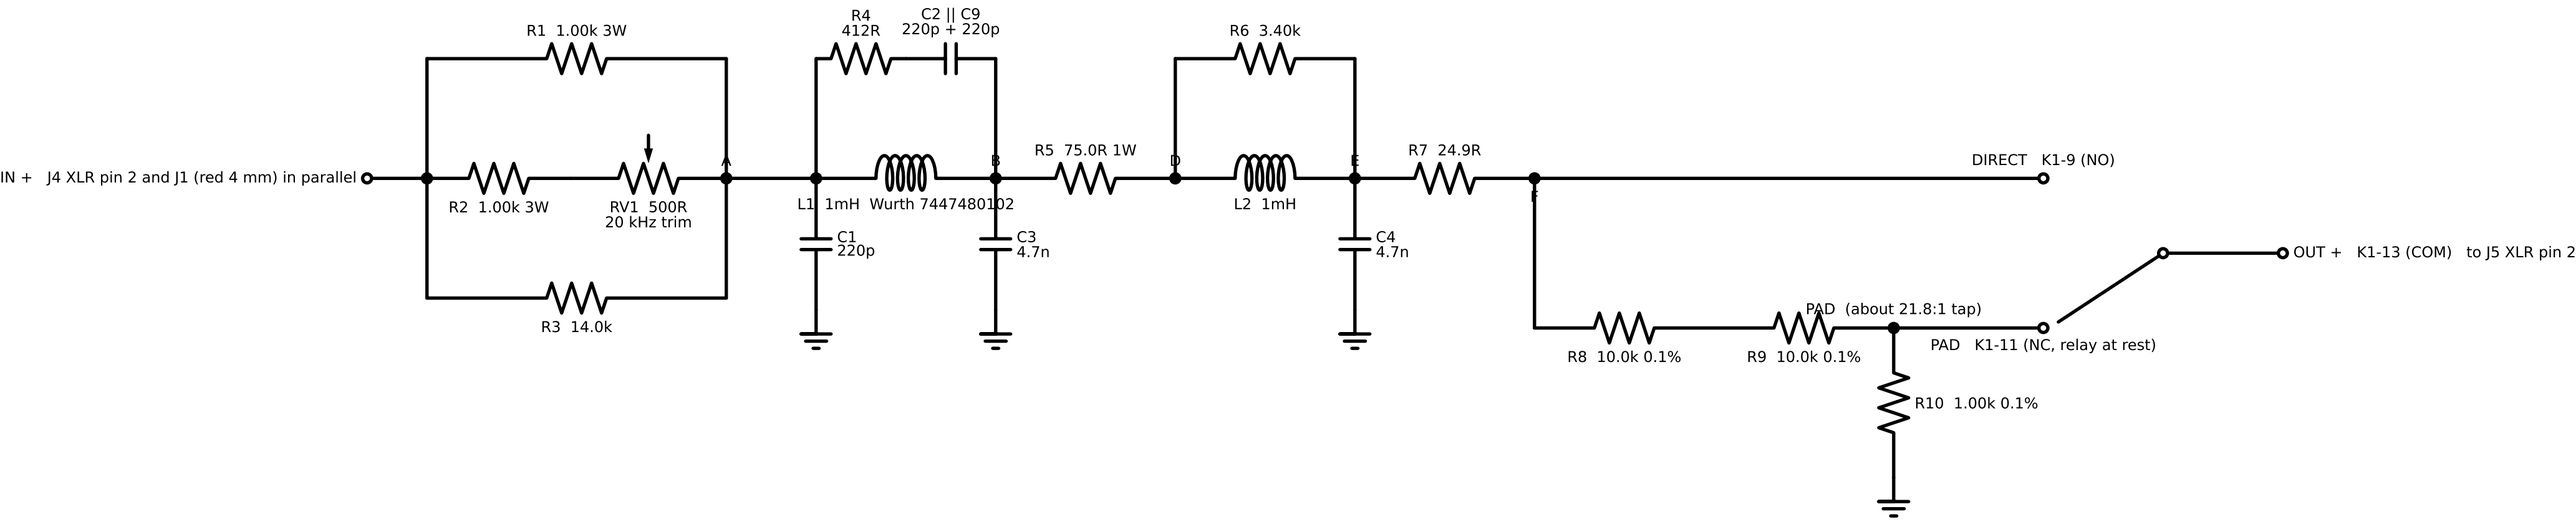

Negative leg, IN - (J4 XLR pin 3 / J2 black) to OUT - (J5 XLR pin 3): identical; R11-R20, RV2, C5-C10, L3, L4; its switch is the other relay pole, pins 8 / 4 / 6.
XLR pin 1 and shell, J3 (green 4 mm), the ground plane and the box: GND = the QA403's Audio Common. Connectors as on the AP AUX-0025; the QA403 takes an XLR-to-two-BNC lead.
K1 (Omron G6A-274P-ST-US DC12, polarised coil: pin 1 +, pin 16 -) is a footprint only until the matrix controller drives it; until then a DPDT toggle (gold contacts) is wired into its six contact holes. Coil on J9 (1 = +12 V), D1 1N4148 across the coil, cathode (band) to J9-1.
The pad stays on the output in both positions: DIRECT reads 100k || 21k (about 1.035:1, measure it). With K1 at rest or a toggle in PAD the analyzer sees about 1/22 of the amplifier;
DIRECT is the full voltage, DC included: a single-supply bridged amplifier idles at half its supply on both legs, which adds to the peak the QA403 sees.
All values from design.py, sha256 bc188fb.