



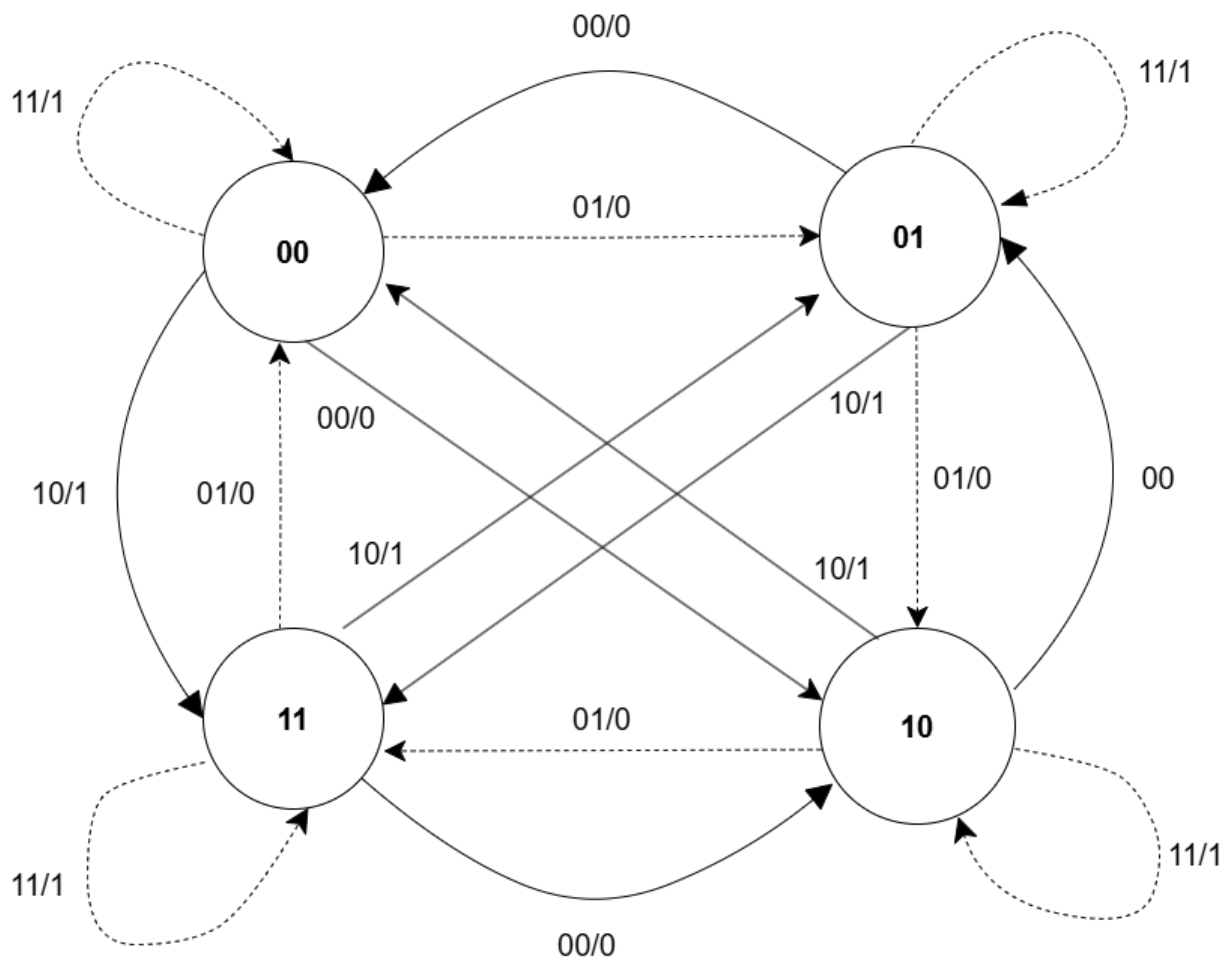


	A	B	X	Y	A+	B+	JA	KA	JB	KB	Z (output)
0	0	0	0	0	1	0	1	x	0	x	0
1	0	0	0	1	0	1	0	x	1	x	0
2	0	0	1	0	1	1	1	x	1	x	1
3	0	0	1	1	0	0	0	x	0	x	1
4	0	1	0	0	0	0	0	x	x	1	0
5	0	1	0	1	1	0	1	x	x	1	0
6	0	1	1	0	1	1	1	x	x	0	1
7	0	1	1	1	0	1	0	x	x	0	1
8	1	0	0	0	0	1	x	1	1	x	0
9	1	0	0	1	1	1	x	0	1	x	0
10	1	0	1	0	0	0	x	1	0	x	1
11	1	0	1	1	1	0	x	0	0	x	1
12	1	1	0	0	1	0	x	0	x	1	0
13	1	1	0	1	0	0	x	1	x	1	0
14	1	1	1	0	0	1	x	1	x	0	1
15	1	1	1	1	1	1	x	0	x	0	1

Equations:

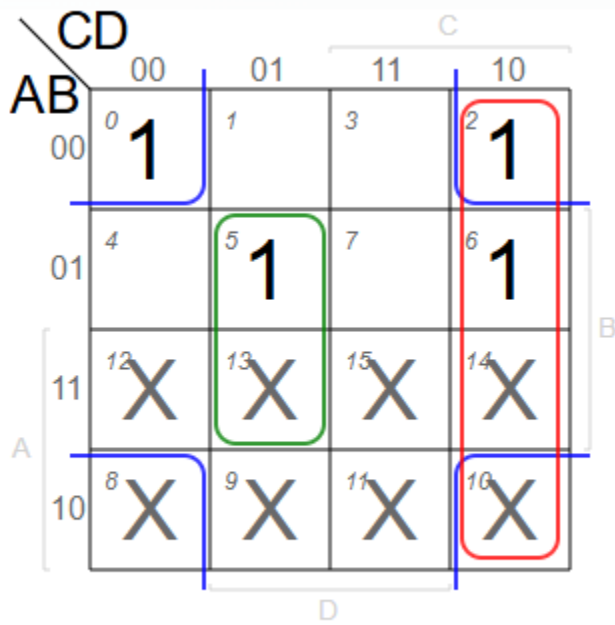


$$F = B'D' + CD' + BC'D$$

$$JA = XY' + B'Y' + BX'Y$$

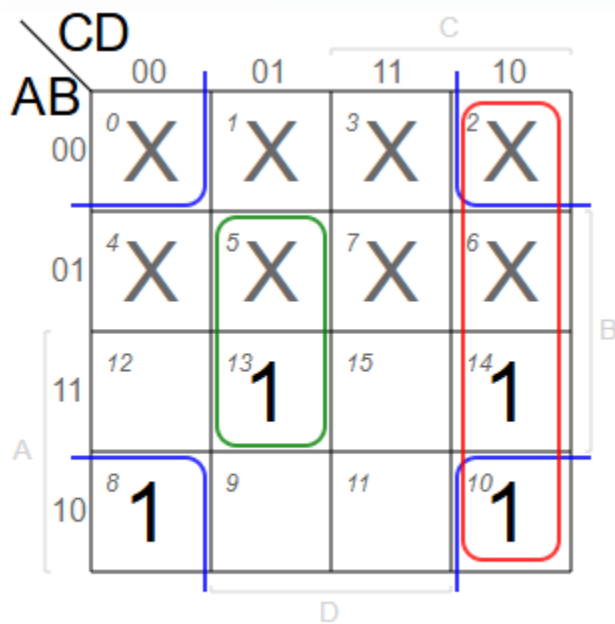


$$F = B'D' + CD' + BC'D$$

$$KA = B'Y' + XY' + BX'Y$$

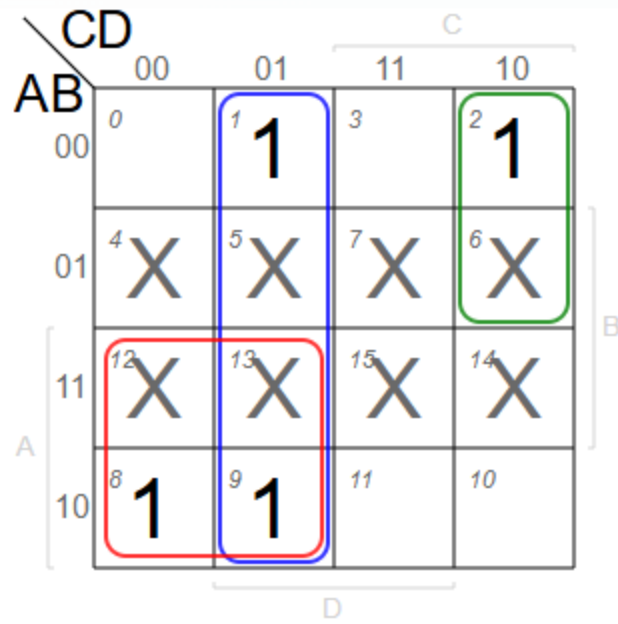

$$F = C'D + AC' + A'CD'$$

$$JB = X'Y + AX' + A'XY'$$

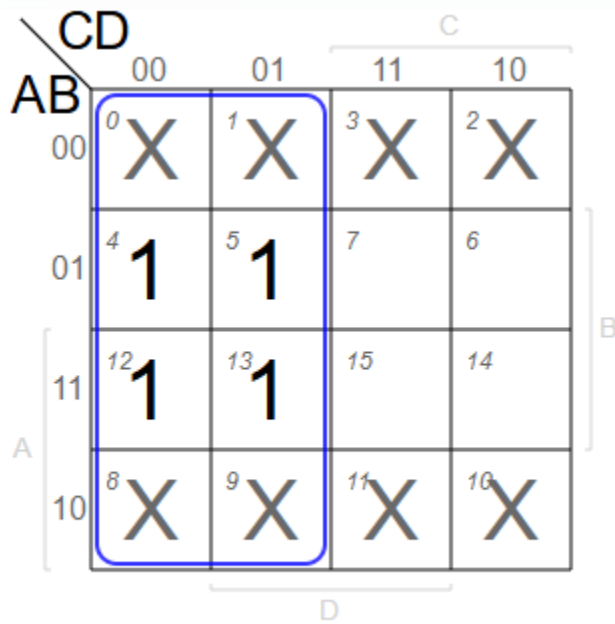

$$F = C'$$

$$KB = X'$$

		CD			
		00	01	11	10
AB	00	0	1	3 1	2 1
	01	4	5	7 1	6 1
	11	12	13	15 1	14 1
	10	8	9	11 1	10 1

$$Z = X$$