

Button wiring:



Engraved “3” on the left side facing forwards

Engraved “4” on the right side facing forwards

Note: “Terminal #” refers to the terminal connected to wire # on the connector cable (see below)

Terminal 3 (Green)

Terminal 4 (Green)

Terminal 5 (White)

Terminal 6 (Black)

Button wire connections:

5: + Terminal on Boost Converter

3: Individual Raspberry Pi GPIO Pins (See below)

4: Power distribution board (any A# pin, i.e. A1)

6: - Terminal on Boost Converter

Note: wires 1 and 2 are unused and can be cut off


Red button (English): GPIO 17
Orange button (Spanish): GPIO 27
Blue button (Telugu): GPIO 22

After inserting the black and white wires from each of the 3 buttons, tighten screws to secure the connections

Boost converter wiring:




Power Distribution Board Wiring:

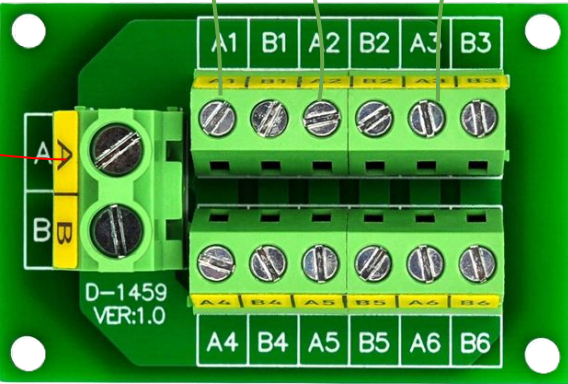


Terminal A: 3.3 V (Pin 1)

Green wires (wire 4) from each individual button (order/specific pin does not matter, as long as they are all connected to terminals with the same letter as the terminal connected to 3.3V)

Raspberry Pi wiring:

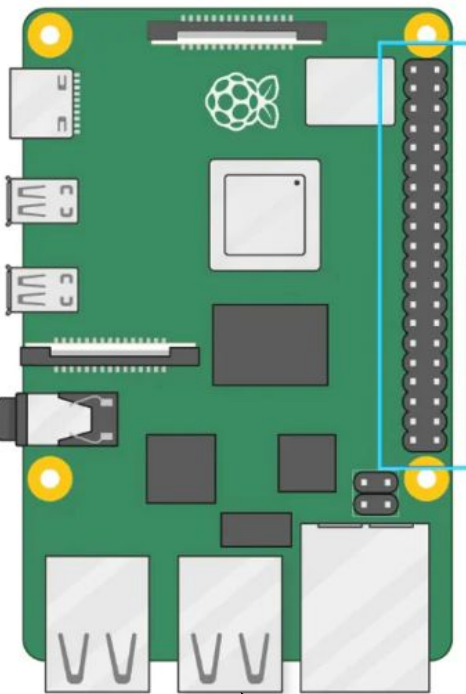

		3.3V		1	2	5V	
				3	4	5V	
I ² C		SDA	GPIO 2	5	6	GND	
SCL			GPIO 3	7	8	GPIO 14	TXD
			GPIO 4	9	10	GPIO 15	RXD
			GND	11	12	GPIO 18	CLK
			GPIO 17	13	14	GND	PCM
			Red (English)	15	16		
			GPIO 27	17	18		
			Orange (Spanish)	19	20		
			GPIO 27	21	22		
			Blue (Telugu)	23	24		
			GPIO 22	25	26		
			3.3V	27	28		
				29	30		
				31	32		
				33	34		
				35	36		
				37	38		
				39	40		

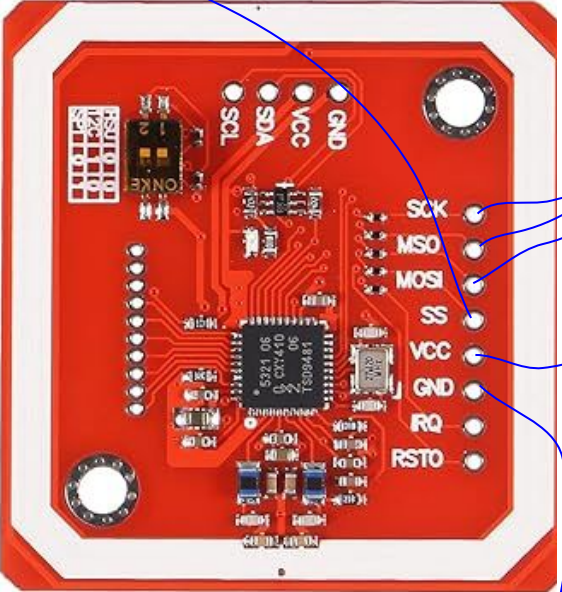

SCK: GPIO 11 (Pin 23)
MSO: GPIO 10 (Pin 19)
MOSI: GPIO 9 (Pin 21)
SS: GPIO 4 (Pin 7)
VCC: 3.3 V (Pin 17)
GND: GND (Pin 39)

NFC Reader wiring