EN - For pricing and availability in your local country please visit one of the below links:

DE - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

FR - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:


1307-0001

EN
This Datasheet is presented by the manufacturer

DE
Dieses Datenblatt wird vom Hersteller bereitgestellt

FR
Cette fiche technique est présentée par le fabricant

cell type:			Li-Ion
cell size:			18650
built-in cell:			LG INR 18650 MJ1 3500mAh
			Conditions
nominal voltage:	3.6	V	
capacity			
nominal:	3500	mAh	discharge at 0.2C
minimum:	3350	mAh	discharge at 0.2C
	3200	mAh	discharge at 1C
			ta: 20°C; EV(Discharge End Voltage): 2.50V
discharge			
max. continuous discharge current:	5000	mA	ta: 0....45°C **important:** avoid cell temperature above 60°C
discharge end voltage:	≥ 2.75	V	(recommended) **important:** avoid long time deep discharge
charge			
charging method:			CC - CV (Constant Current - Constant Voltage)
initial charge current:	680	mA	at standard charge
	1700	mA	at rapid charge
charge end voltage:	4.2	V	± 50mV
charge cut off			
by time:	6	h	at standard charge
	3	h	at rapid charge
by current drop:	50	mA	end current - cut off
internal resistance:	≤ 100	mΩ	at 1kHz, sine wave measurement according to IEC 896-2
energy:	12.60	Wh	
safety board protection functions			
overcharge cut off voltage:	4.325	V	± 0.05V
deep disch.cut off voltage:	2.5	V	± 0.1V
overload cut off current:	8	A	± 2A
life time expectance			
(C>70% of min. capacity)	≥ 300	cycles	at 0.5C charge/discharge rate
self discharge:	≤ 2	%/month	at 20°C
	≤ 5	%/month	at 30°C
	≤ 10	%/month	at 40°C
ambient temperature			
range:	0...45	°C	charge
	- 20...60	°C	discharge
	- 20...25	°C	storage max. 1year
	- 20...45	°C	storage max. 3months
preferred charge state for long time storage:	30...50%		
mechanical specifications			
cell dimensions (incl. sleeve)			
diameter d1:	18.5 ± 0.3	mm	
diameter d2:	3.5 ± 0.5	mm	
height h1:	70.0 – 2	mm	
height h2:	1.5 + 0.3	mm	
weight:	49 ± 3	g	

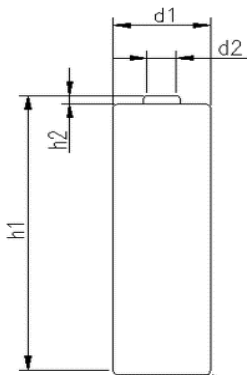

ANSMANN®	**ANSMANN Specifications for model:**	**Li - Ion Battery 3.6V 3500mAh with inside Protection Board (PCB)**
	data sheet no. / part no.	
	supplier no.	703365
	author / date	TG / 25.07.2018

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice

EN - For pricing and availability in your local country please visit one of the below links:

DE - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

FR - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

1307-0001

EN
This Datasheet is presented by the manufacturer

DE
Dieses Datenblatt wird vom Hersteller bereitgestellt

FR
Cette fiche technique est présentée par le fabricant