

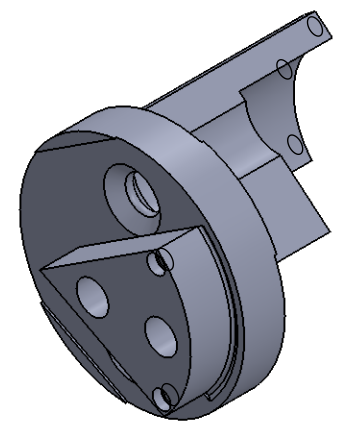
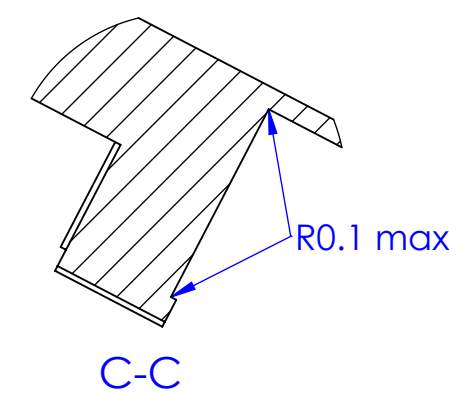
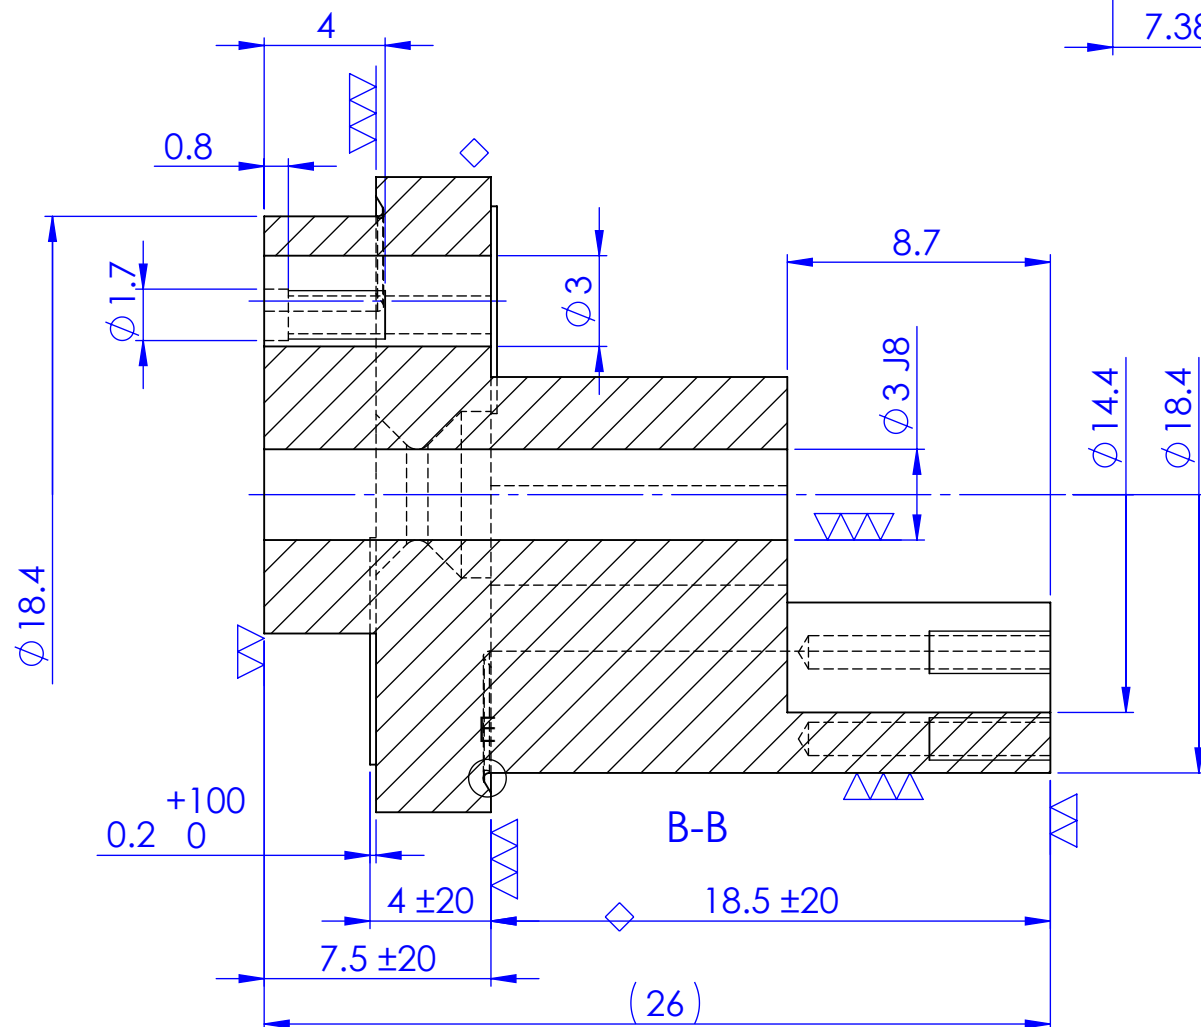
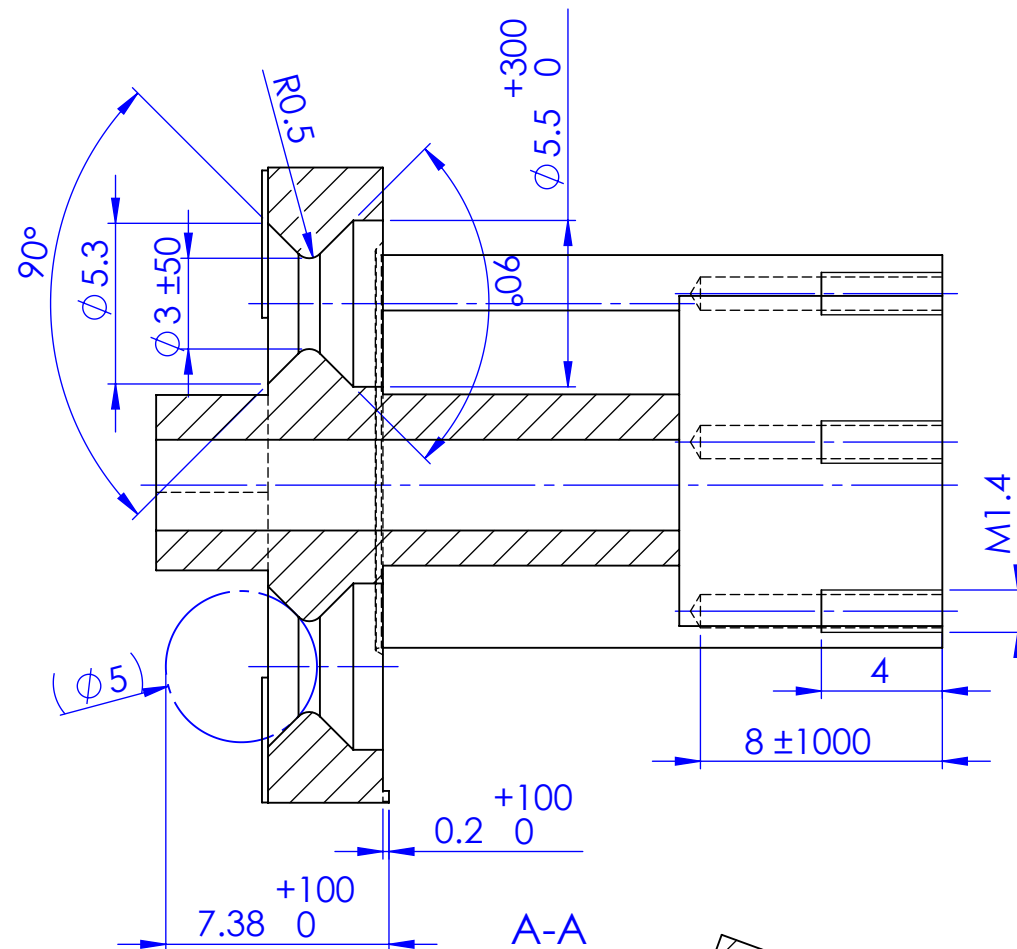
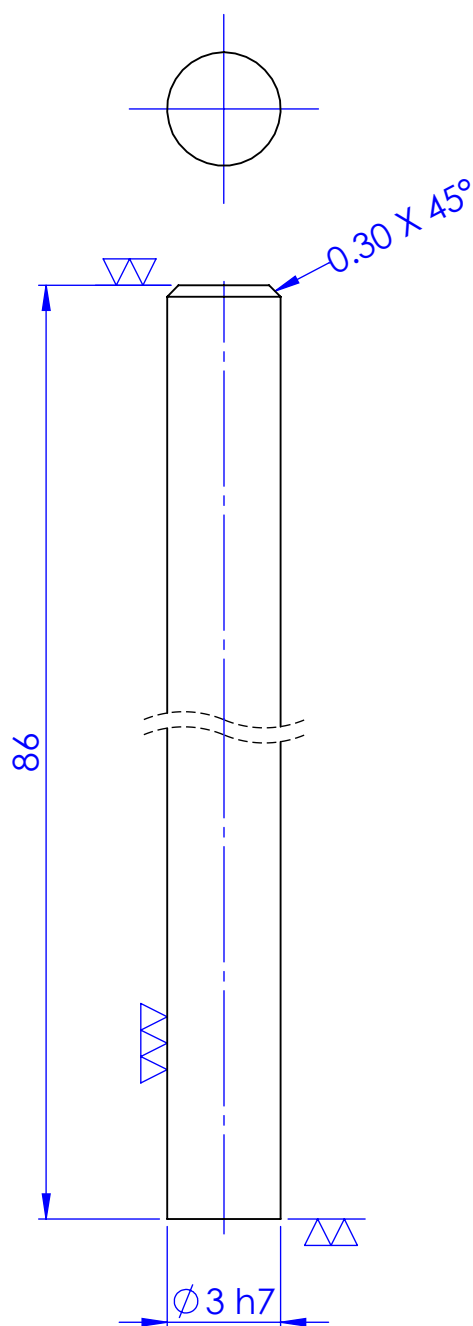



[illegible]


[illegible]


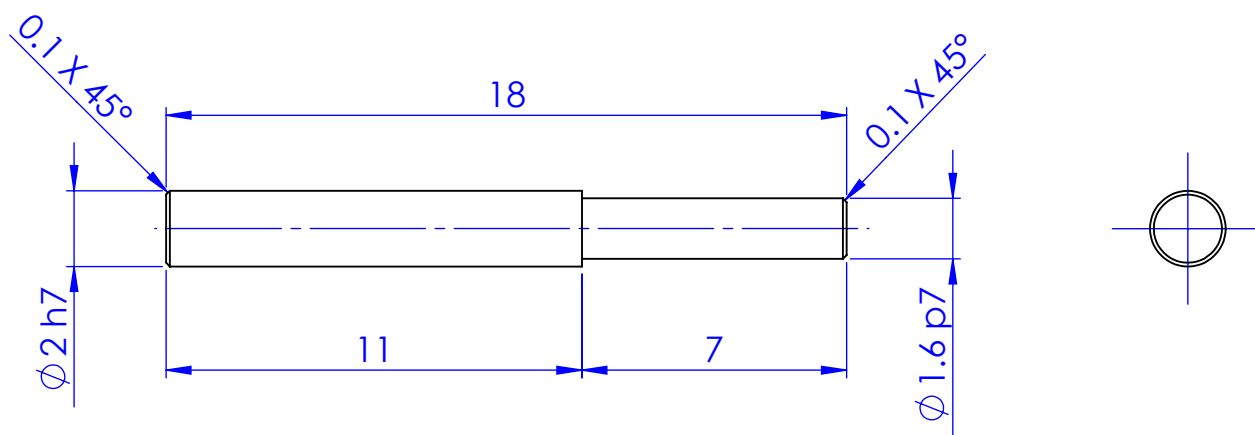


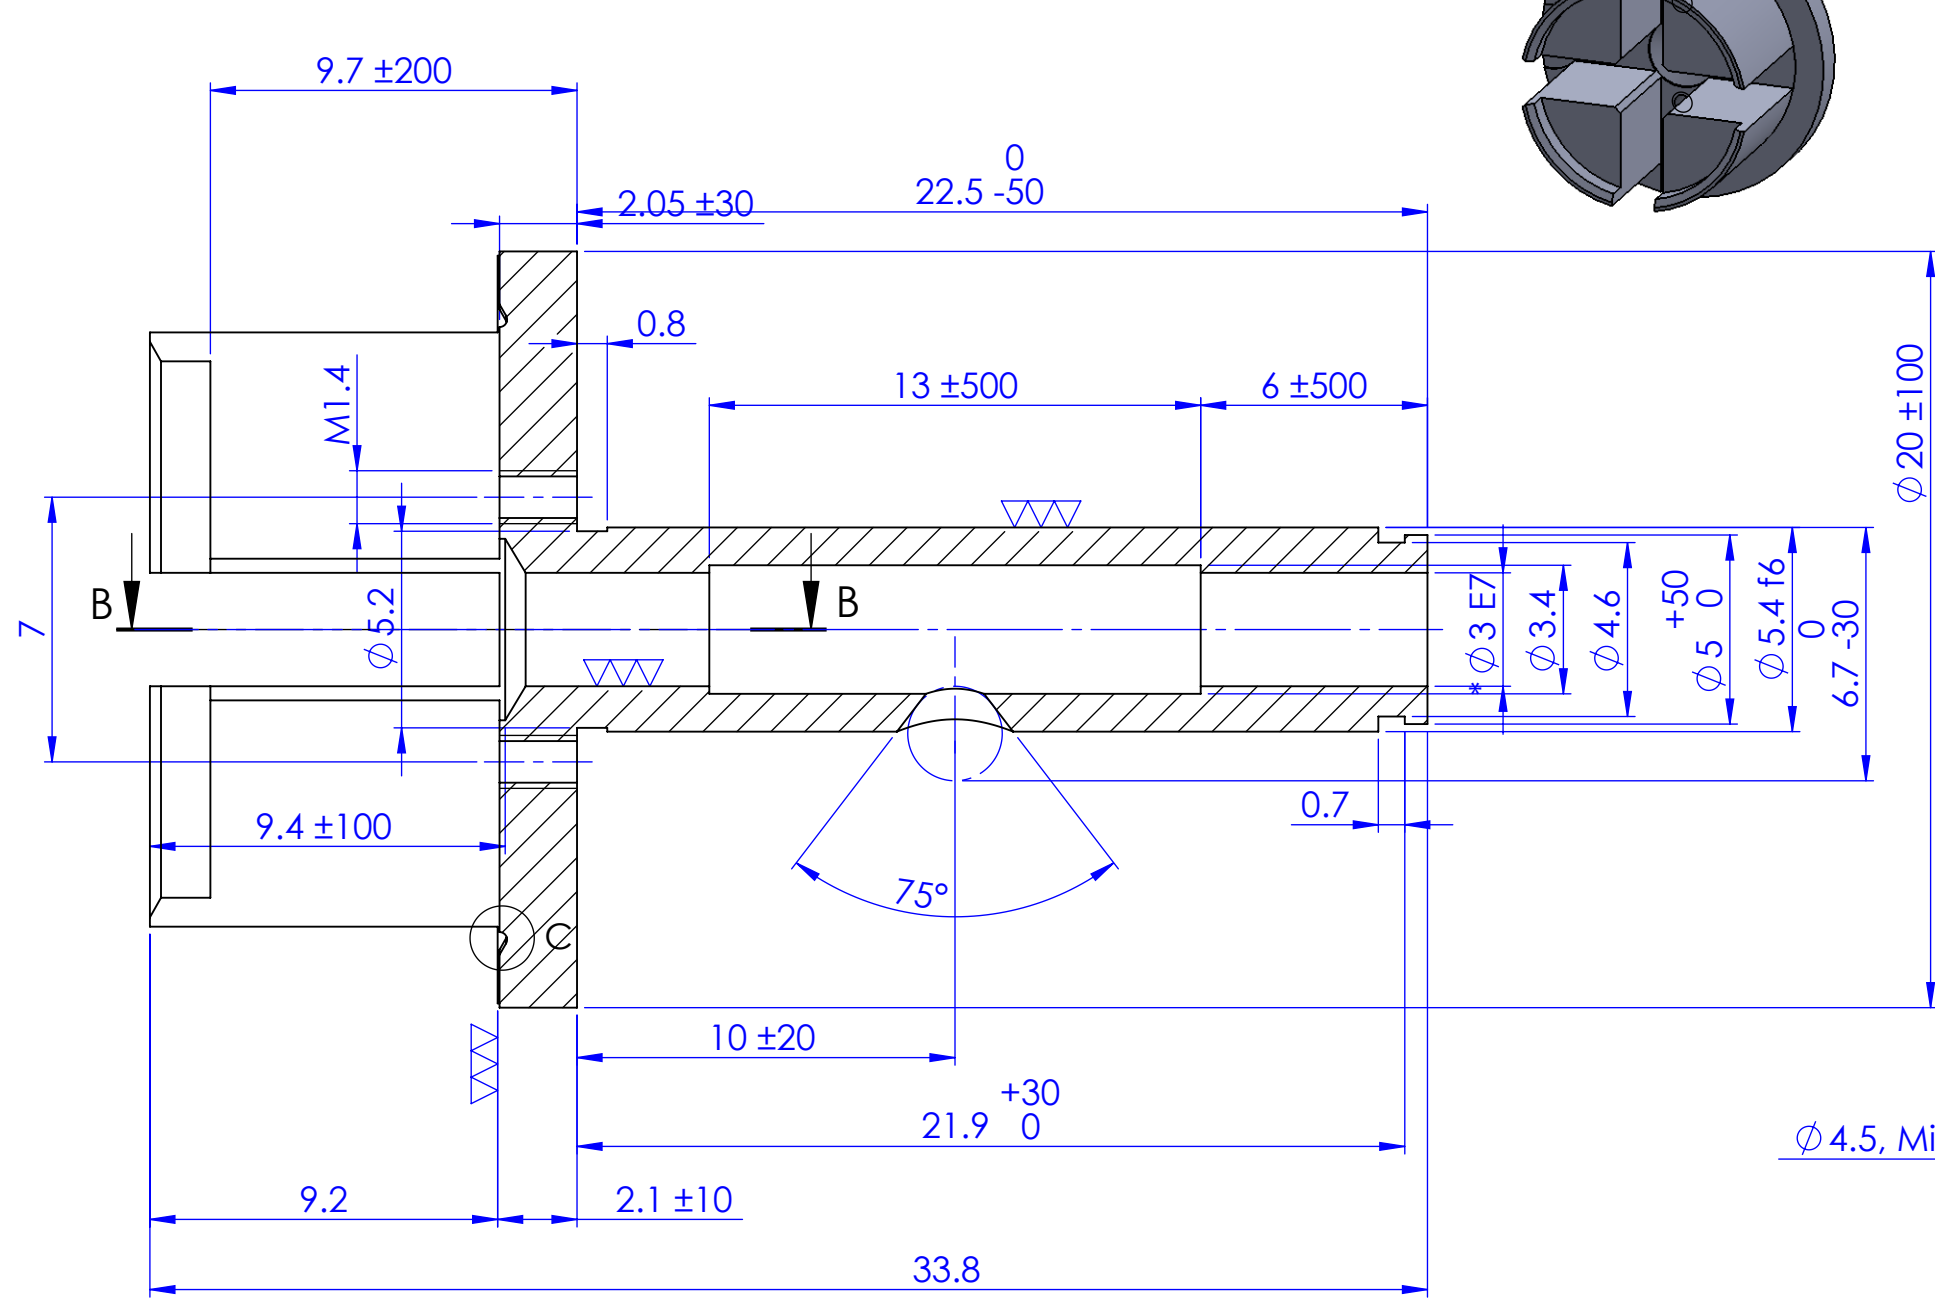




Technical drawing of a mechanical part showing a cross-section B-B. The part has a horizontal base and a vertical section on the right. A dimension line labeled "Cutting Length" spans the horizontal part. A dimension line labeled "2" indicates the thickness of the vertical section. The vertical section is hatched with diagonal lines. The label "B-B" is at the bottom.

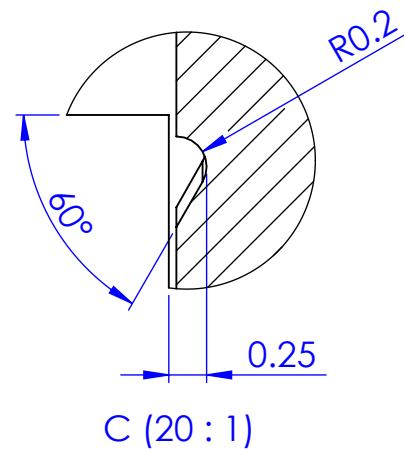


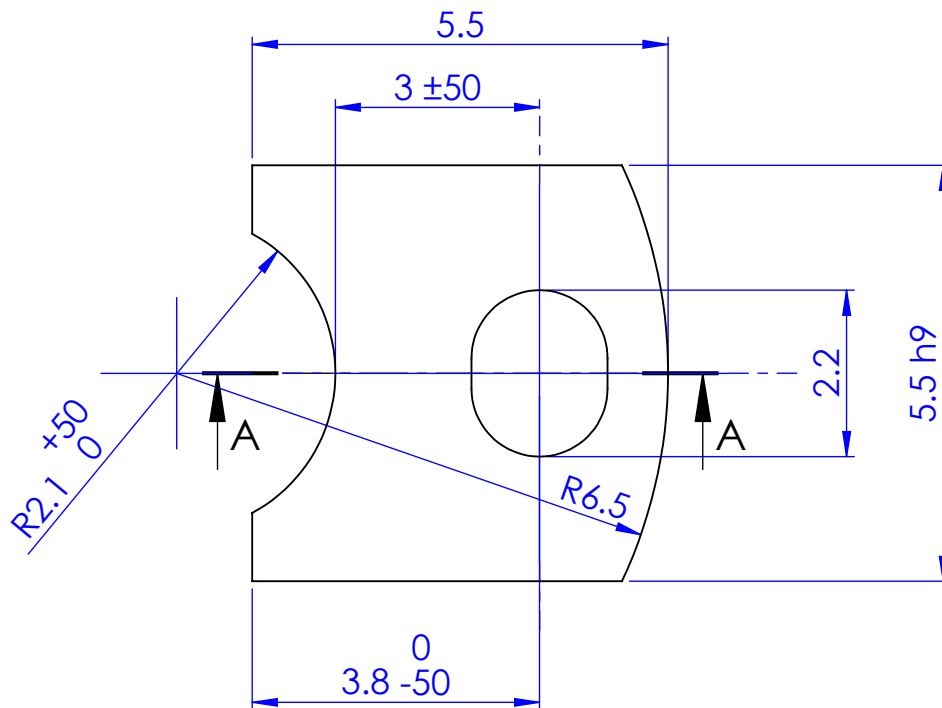

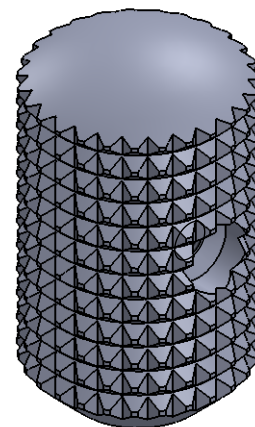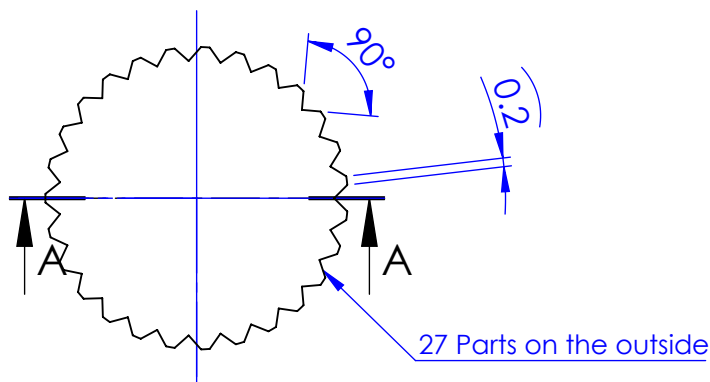


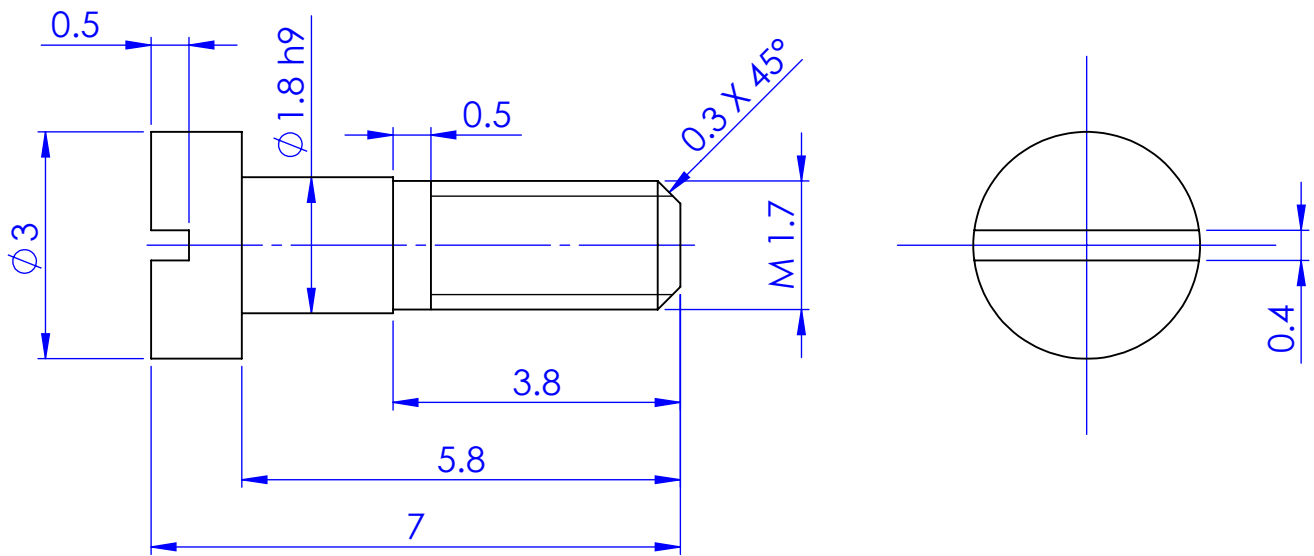


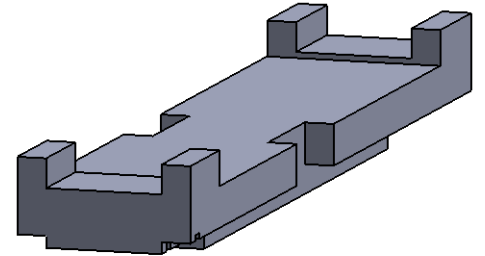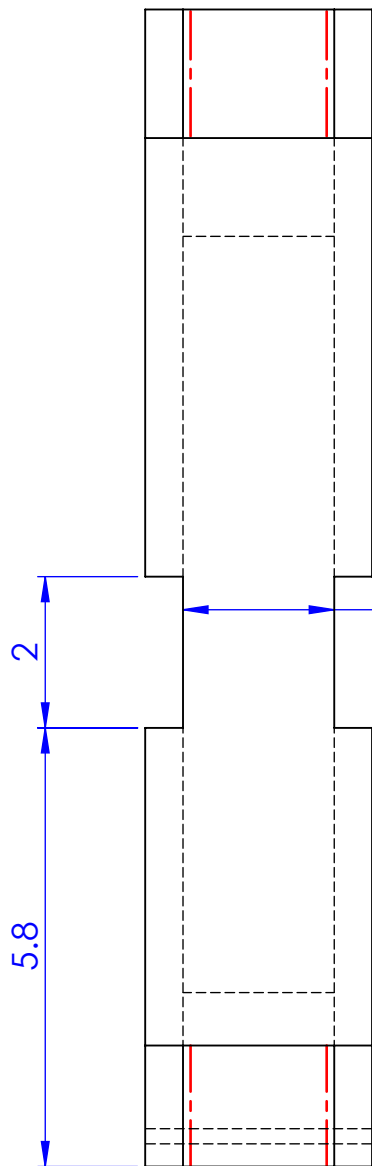


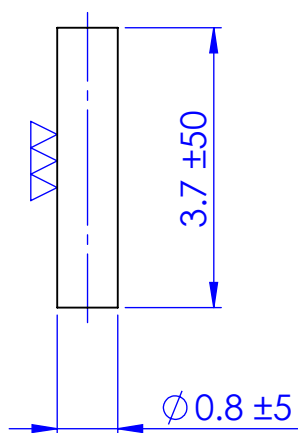


Qty	7														
Type	I														
Tolerances in um = 1/1000 mm															
Max. Deviation tolerated.															
Dimensional: ±100 um															
Max. Deviation tolerated.							Chg.Nr.	Change			Date	Signed			
Angular :															
* Sweeping attack max: 20 um ◇ Lateral runout max: 20 um Without * Sweeping attack max: Without ◇Lateral runout max: Prevailing Surface finish ▽▽(▽▽▽) Surface treatment - Heat treatment					Material: Nichtr.Federst.Dr.Sandvik 2R2 Ø 0.8							Scale 10:1	Drawn	T.V.N	
					Type: I Group								Checked	CODY	
					Full Carry Pin										
													Approved	CODY	
					ReCurta			10019-1							
Assembly Number: 10204															

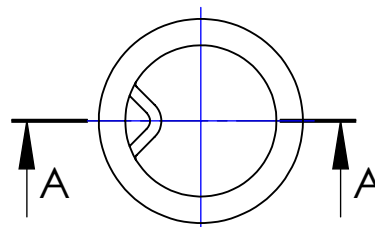


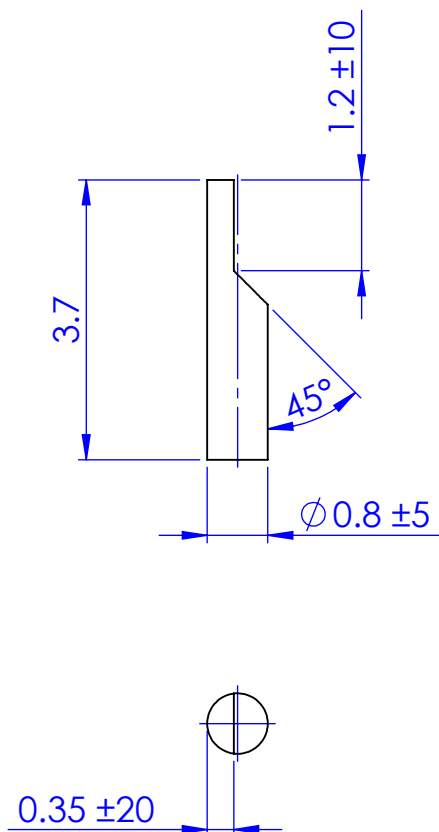
[illegible]

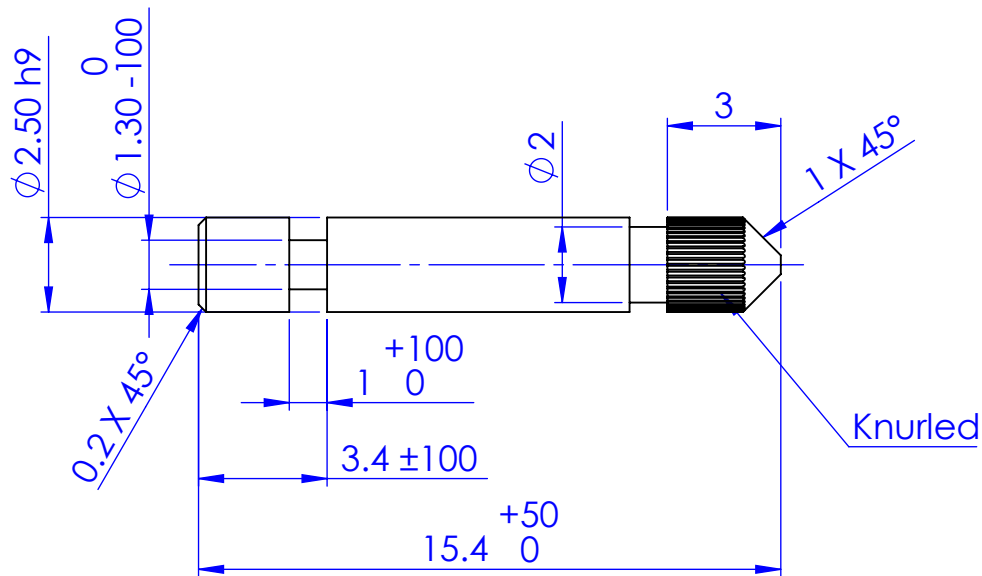
[illegible]

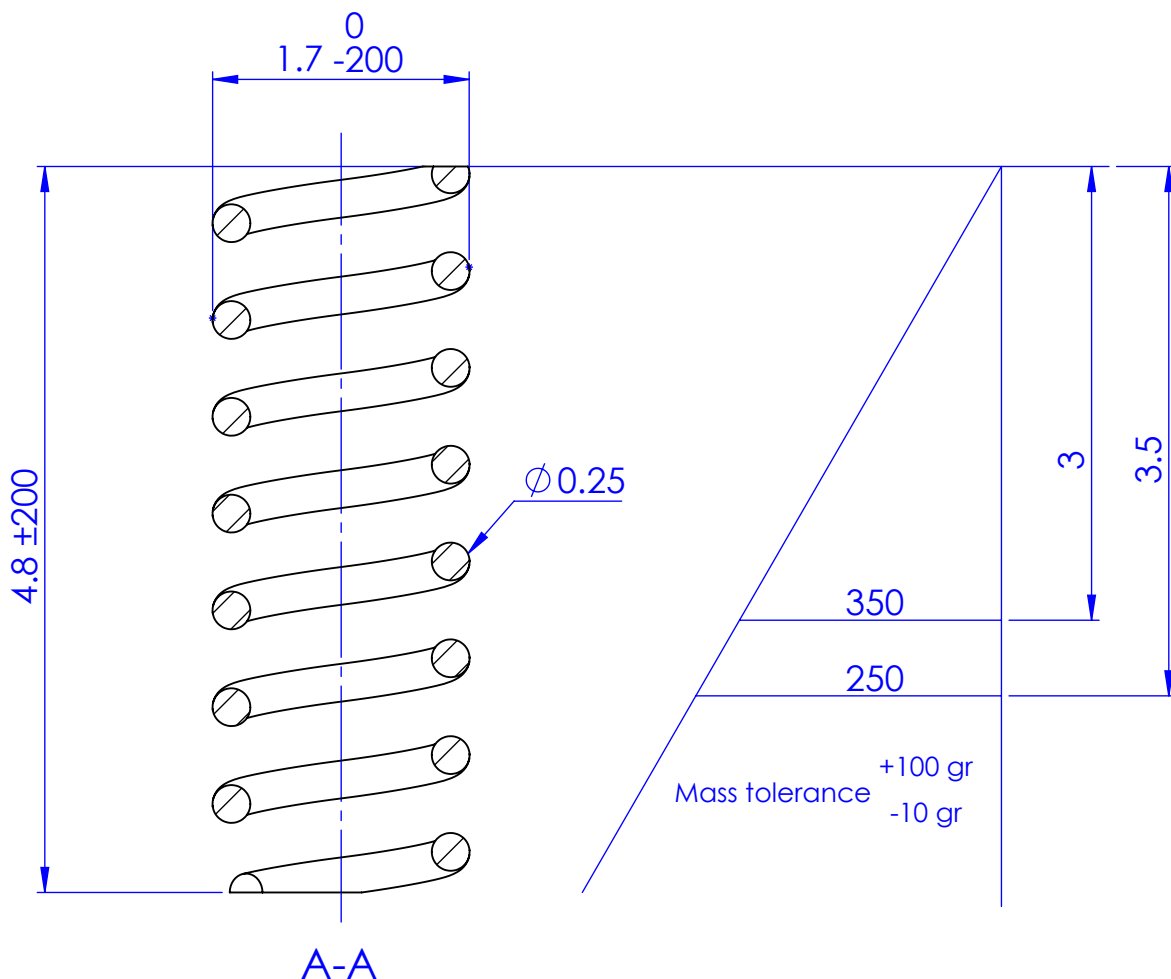

$K_d = 4500 \text{ kg/cm}^2$
 Active turns = 5.5
 End turns = 2
 Total number of turn = 7.5
 Deflection per tur = -

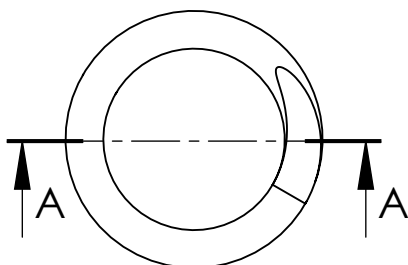[illegible]

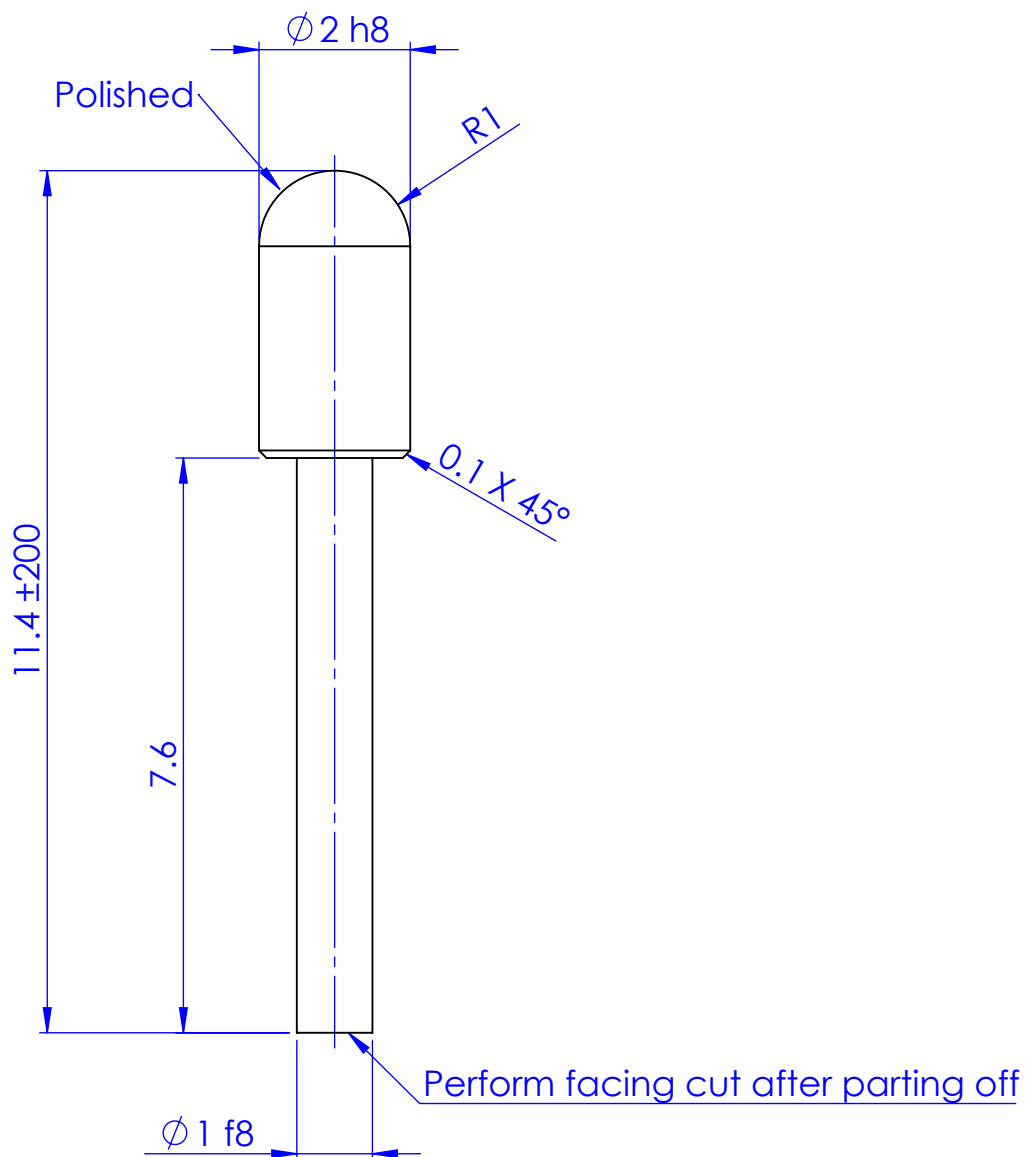
[illegible]

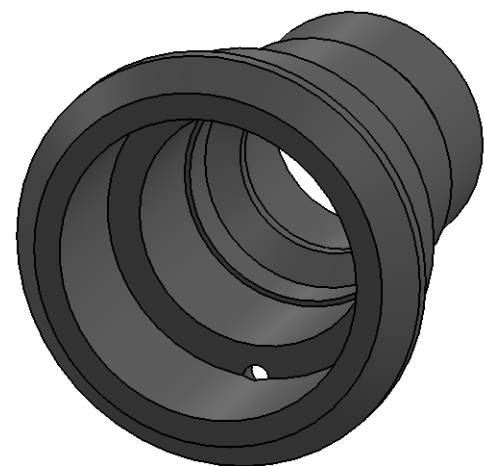



Main Bearing Sleeve Body

ReCurta



10025-5

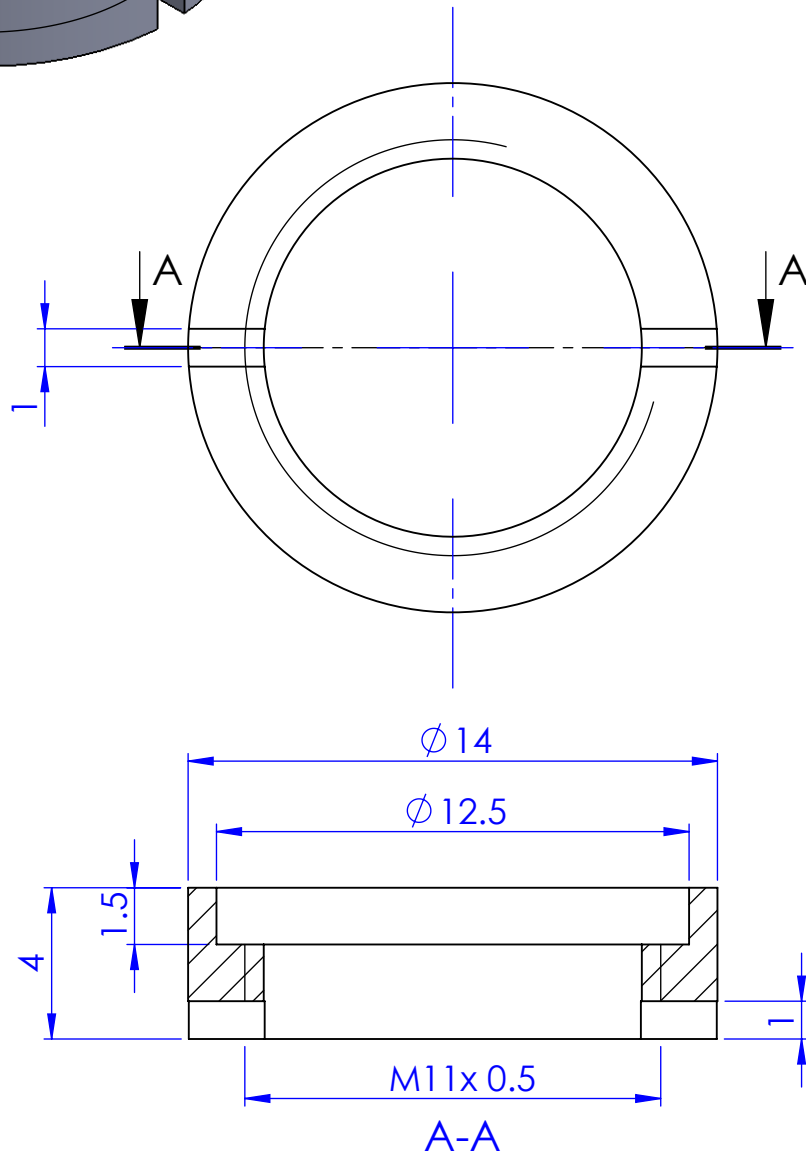
[illegible]

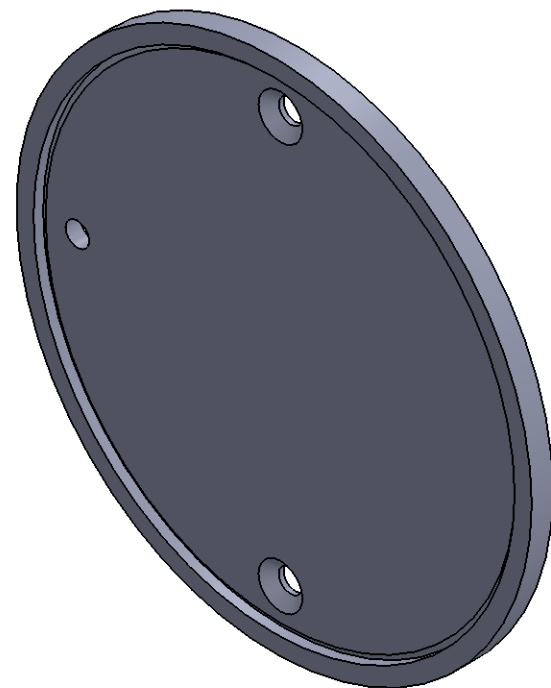1

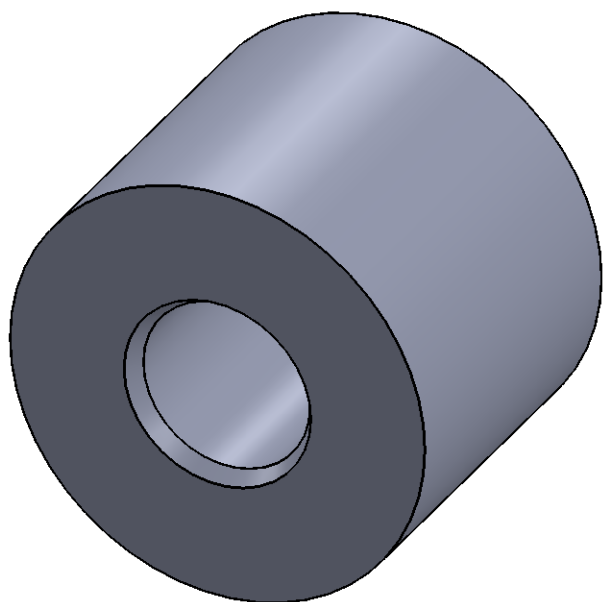[illegible]




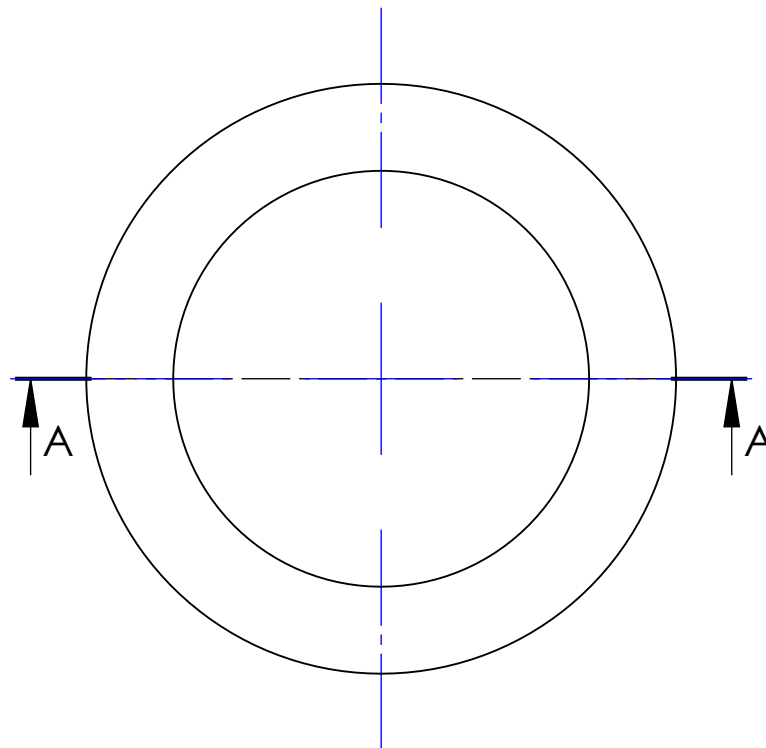
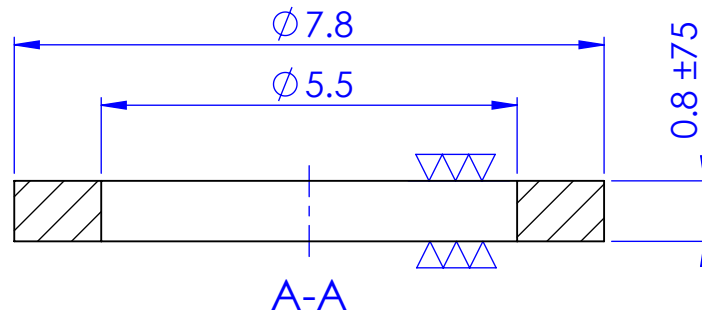


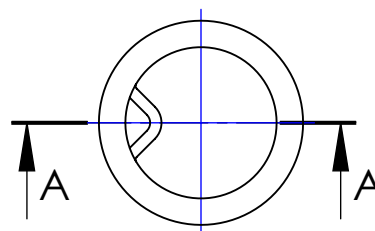



ReCurta



10032-3

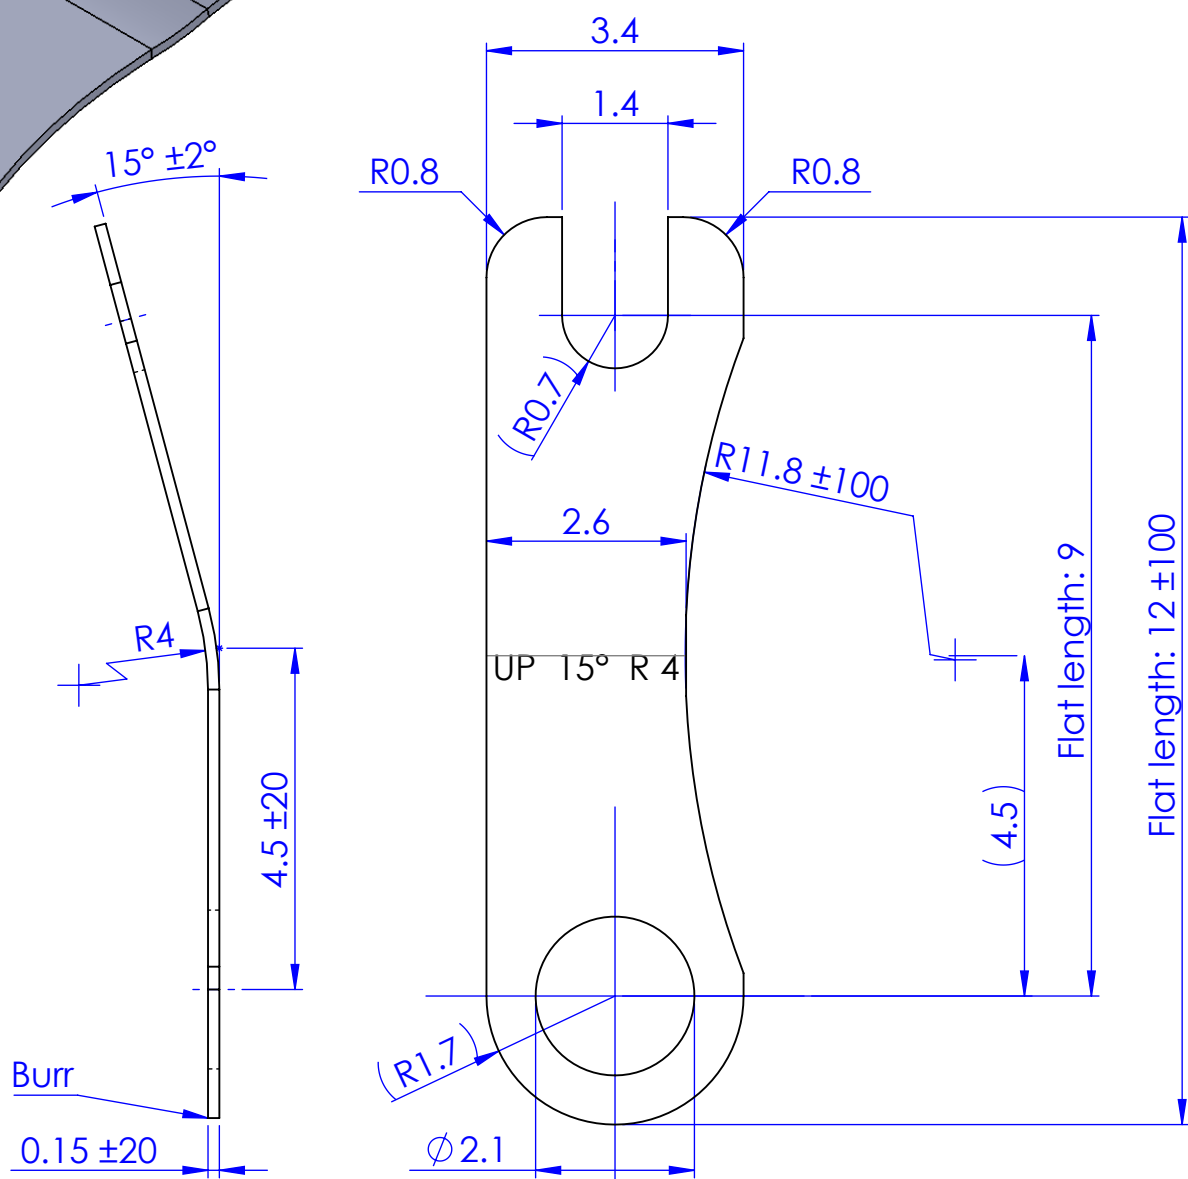
[illegible]

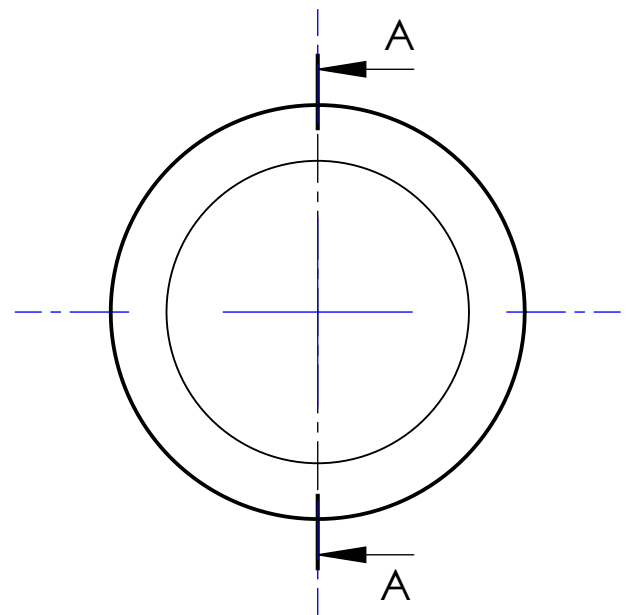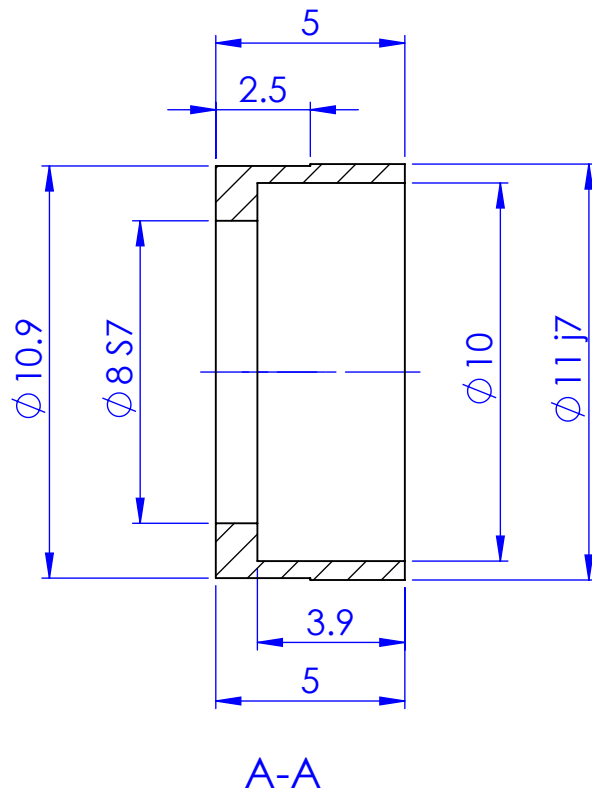


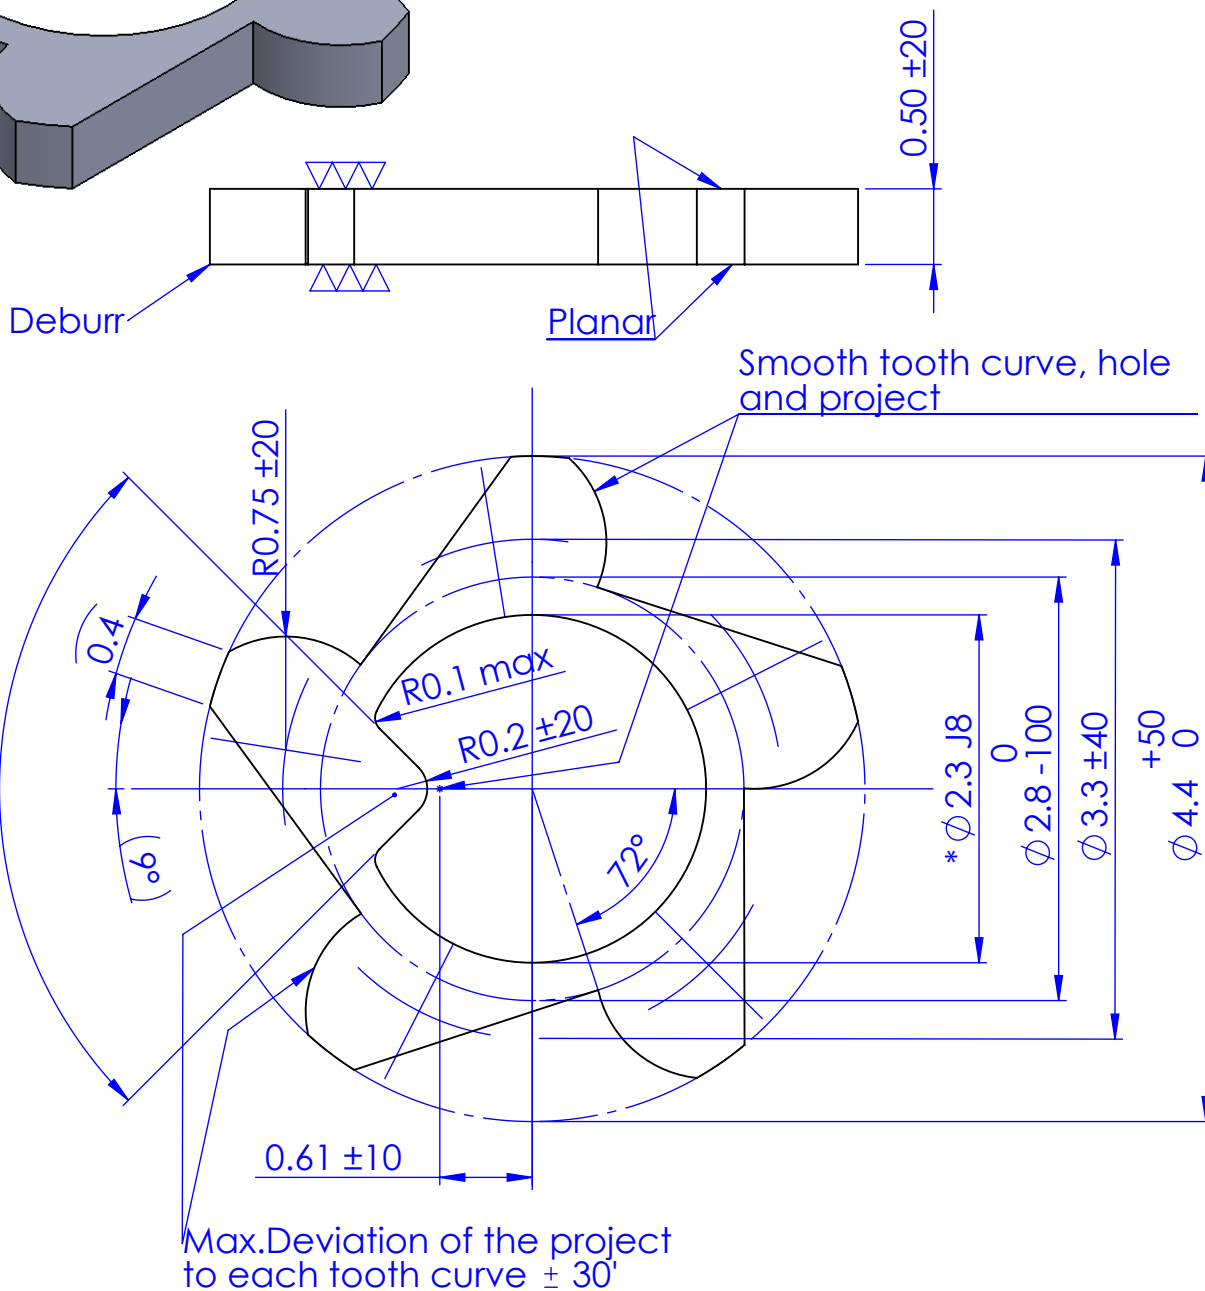





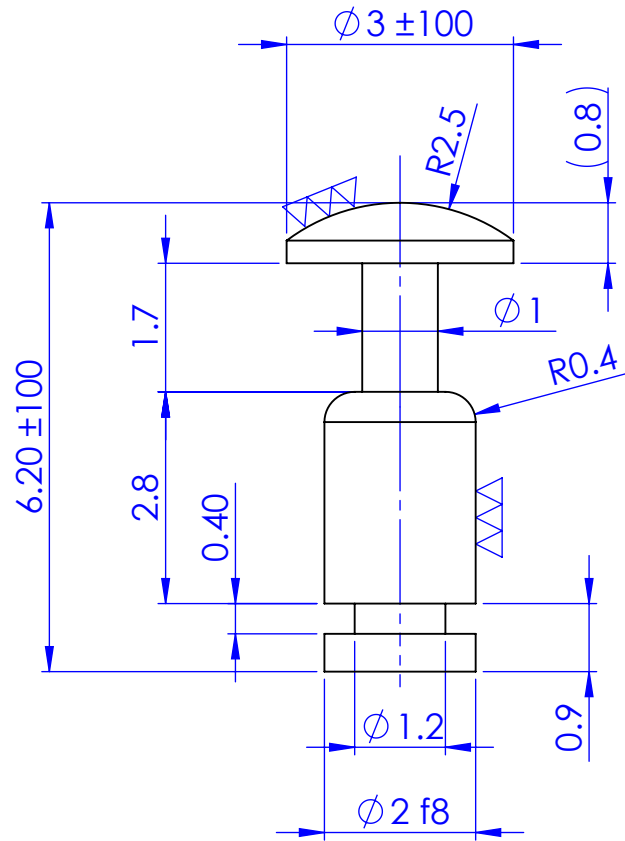




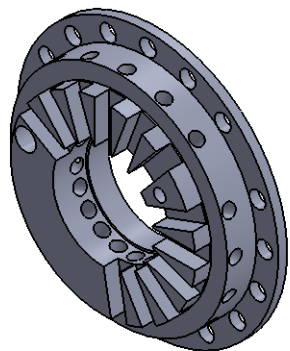
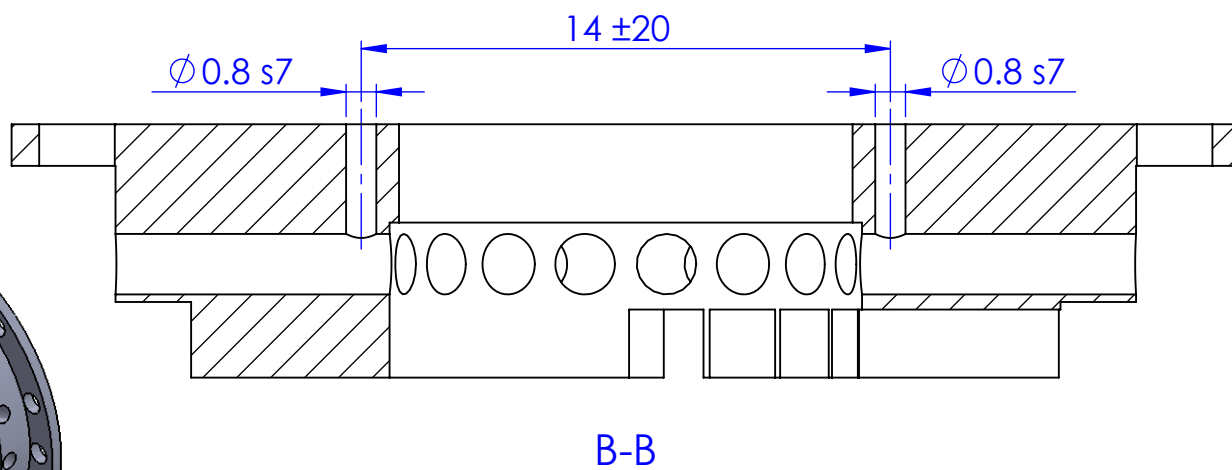
[illegible]





Qty	1															
Type	I															
Tolerances in um = 1/1000 mm																
Max. Deviation tolerated.																
Dimensional: ±50 um																
Max. Deviation tolerated.								Chg.Nr.				Change		Date	Signed	
Angular :																
* Sweeping attack max: 20 um ◇ Lateral runout max: 20 um						Material: Messing 58 Pb Ø 2.7 h11							Scale 10:1	Drawn	T.V.N	
						Type: I Group								Checked	CODY	
Without * Sweeping attack max:50 um Without ◇Lateral runout max:						Ferrule (aka 410348)										
Prevailing Surface finish ▽▽																
Surface treatment -						ReCurta							10041-4			
Heat treatment																
Assembly Number: 10219/218																

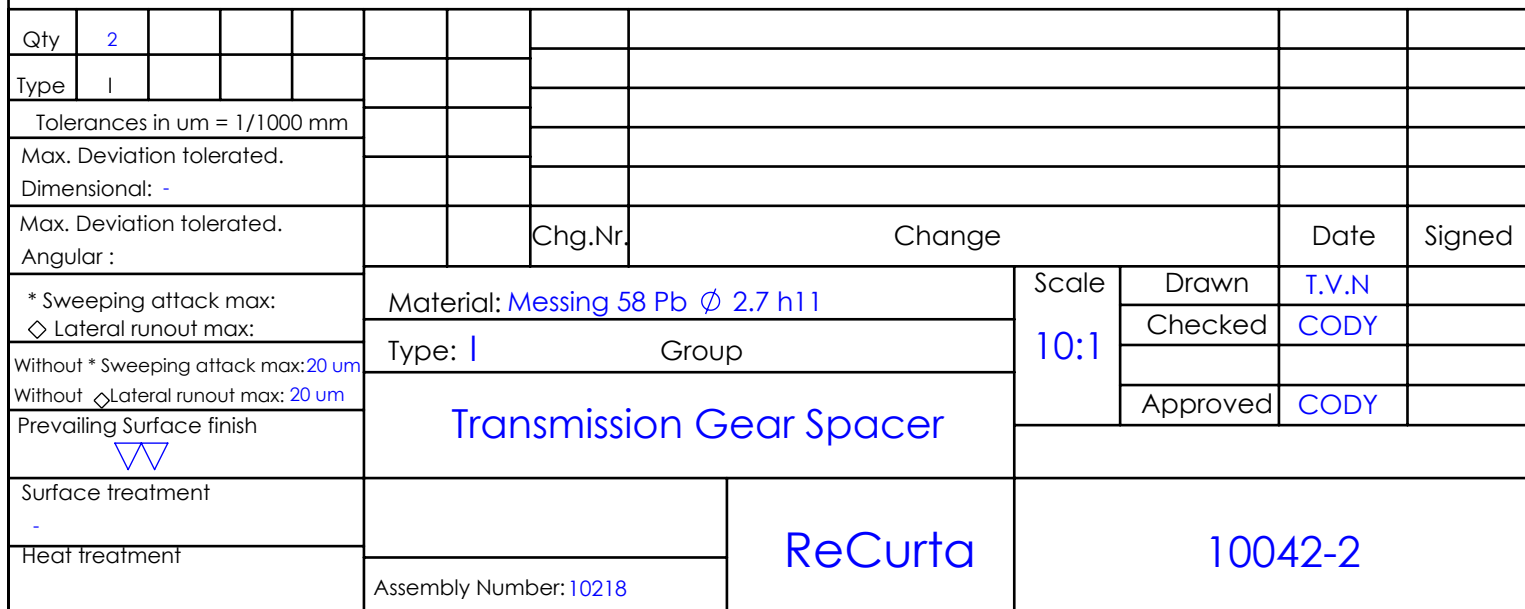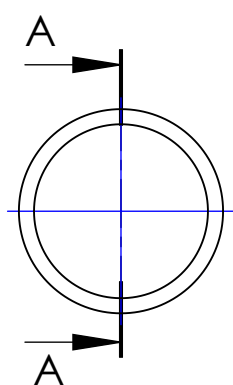

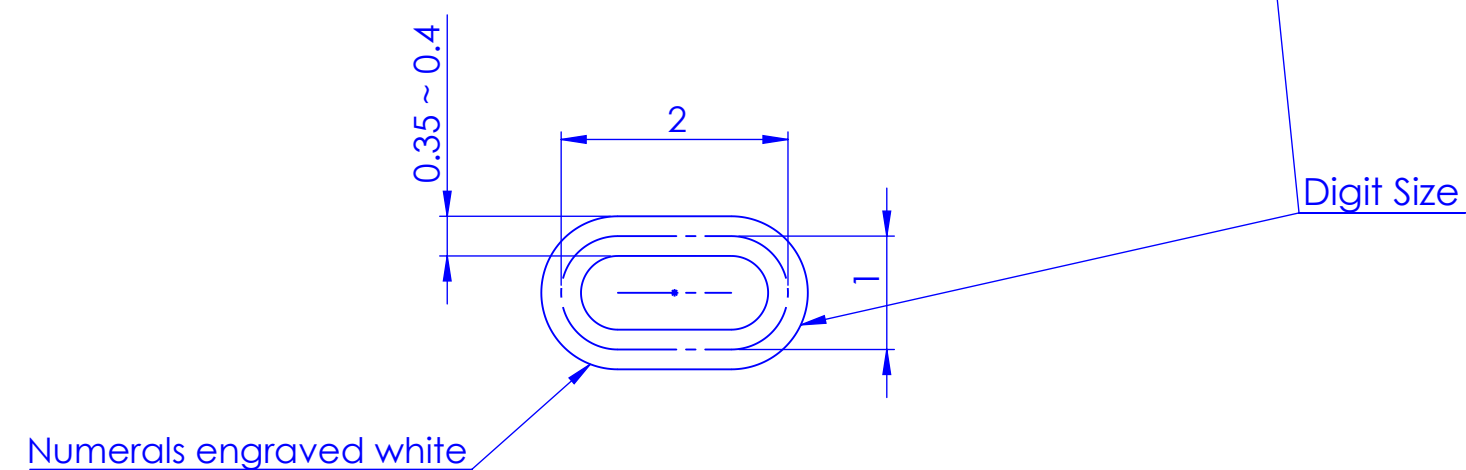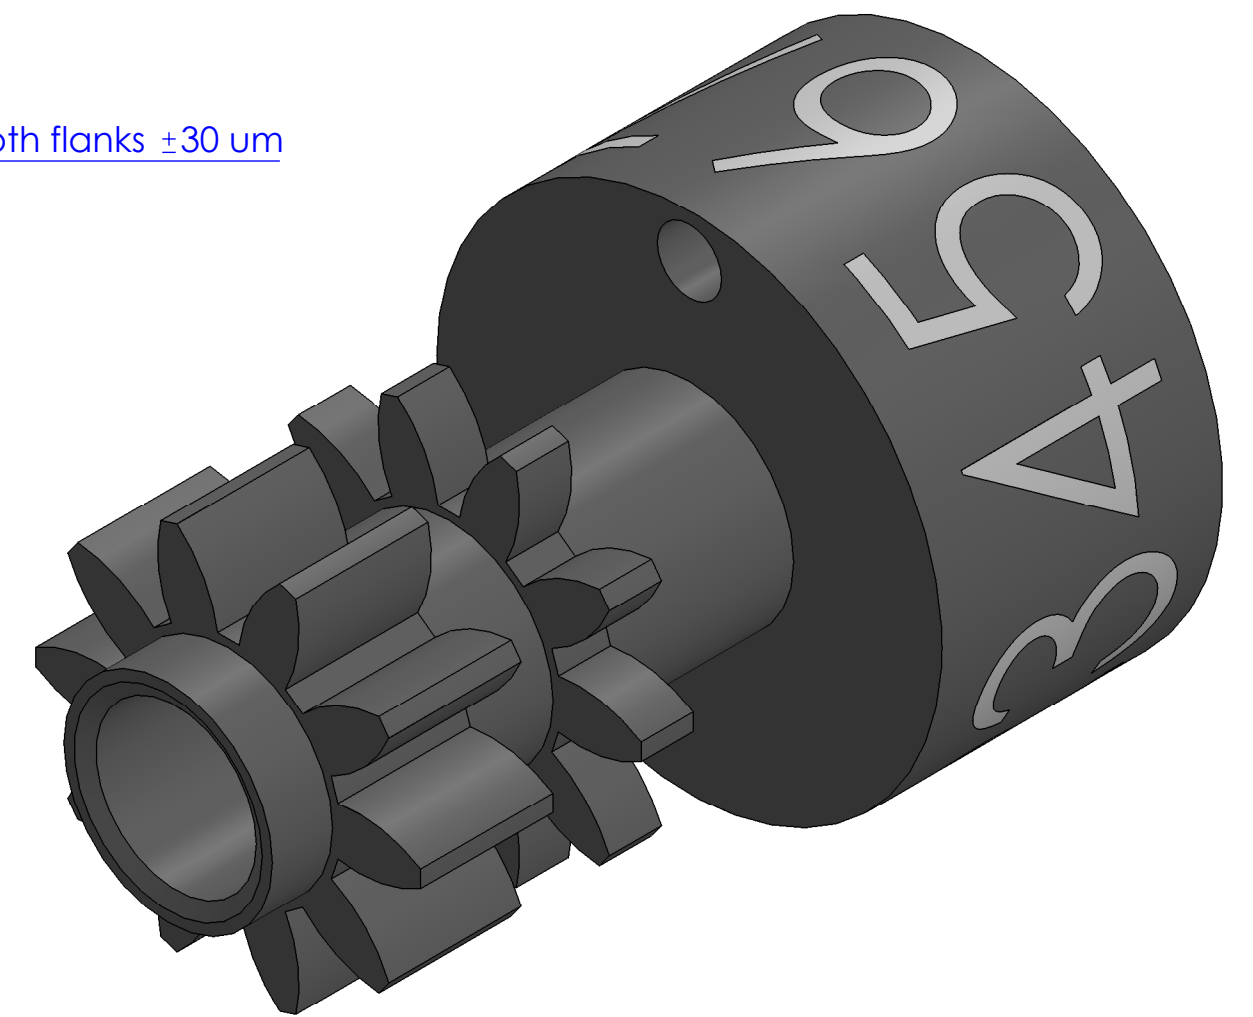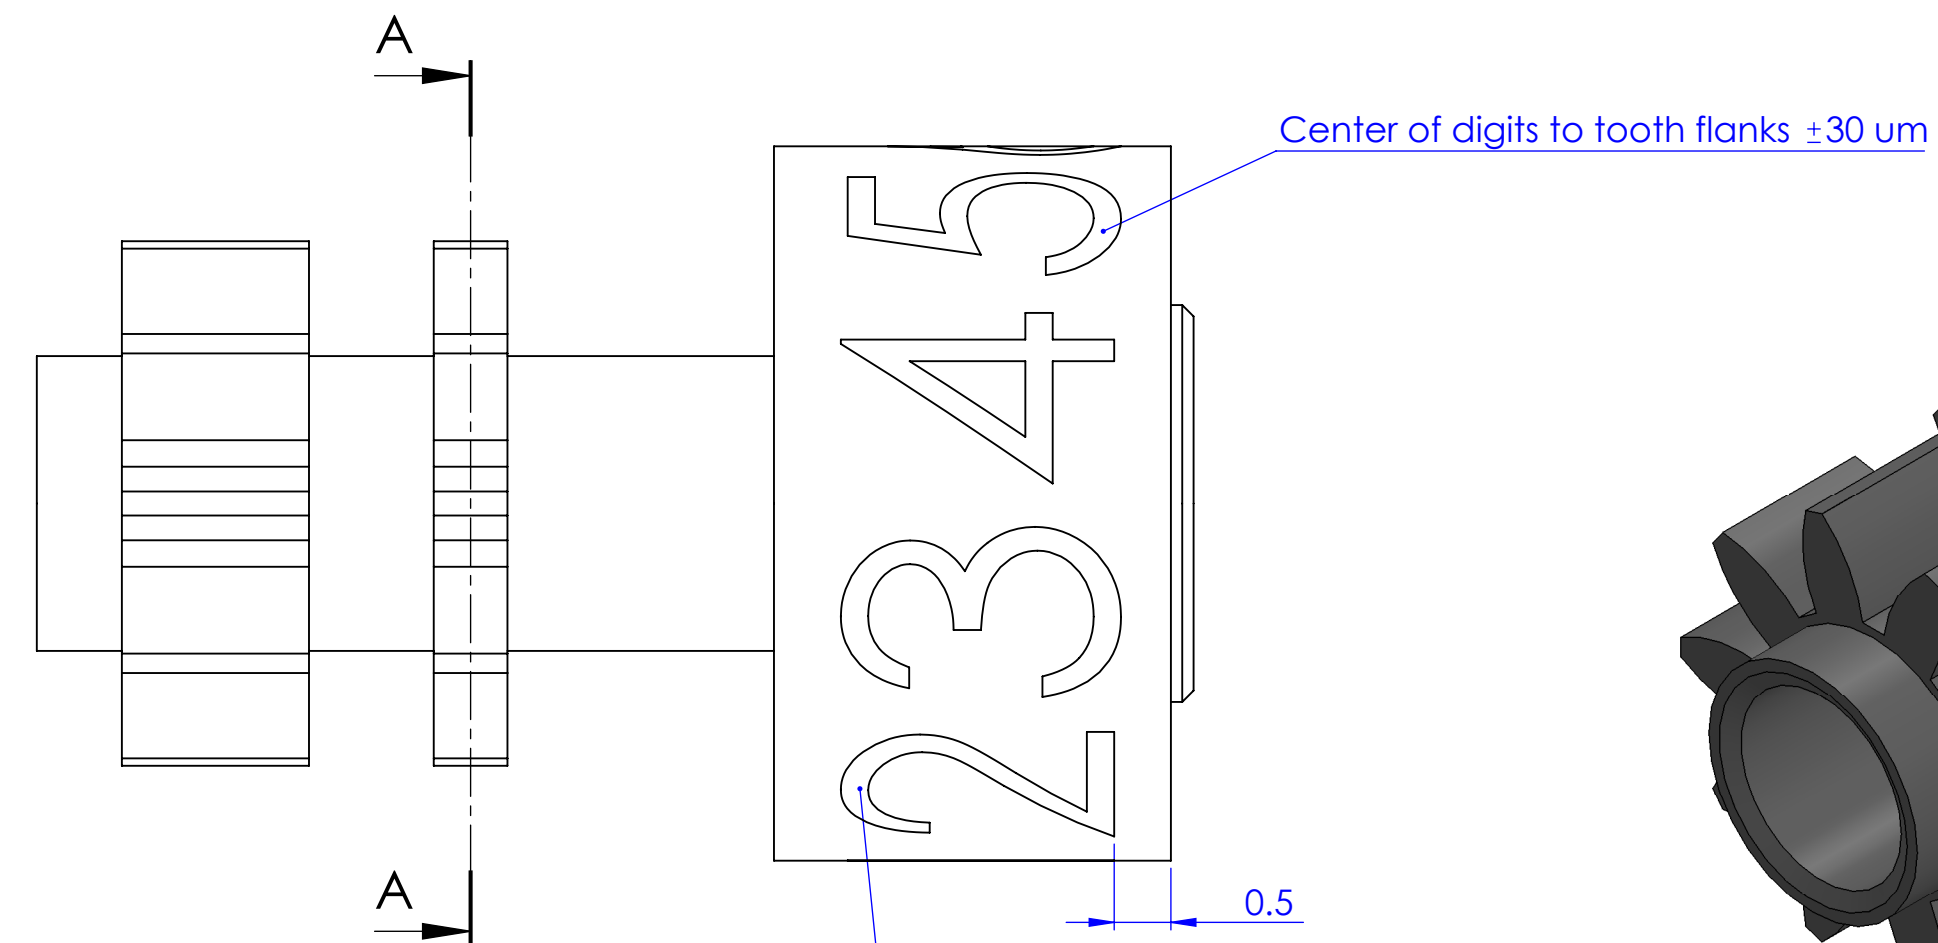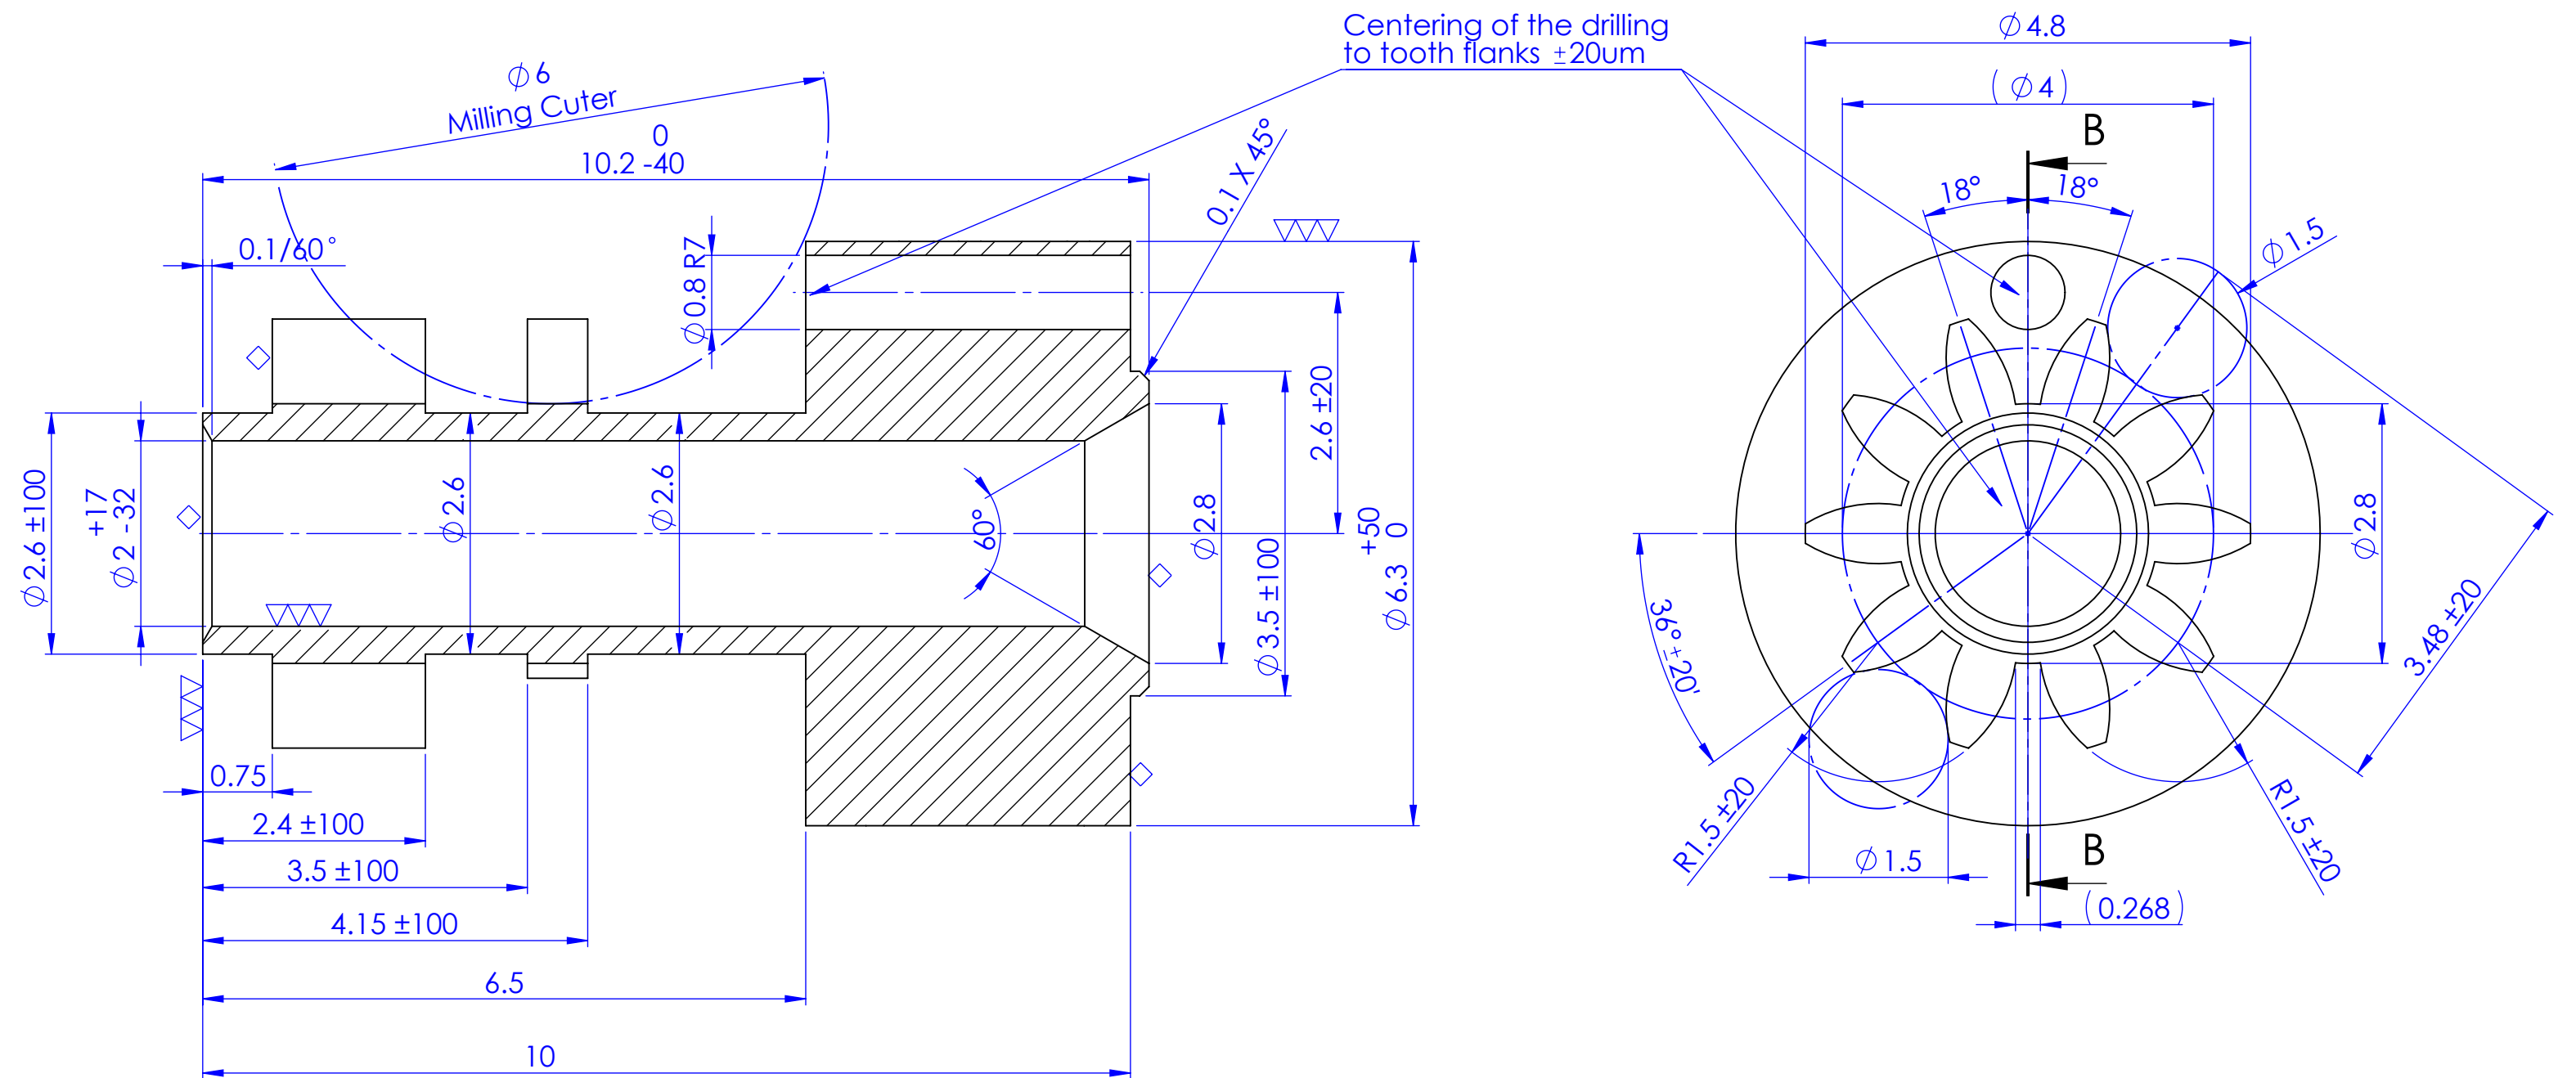
[illegible]

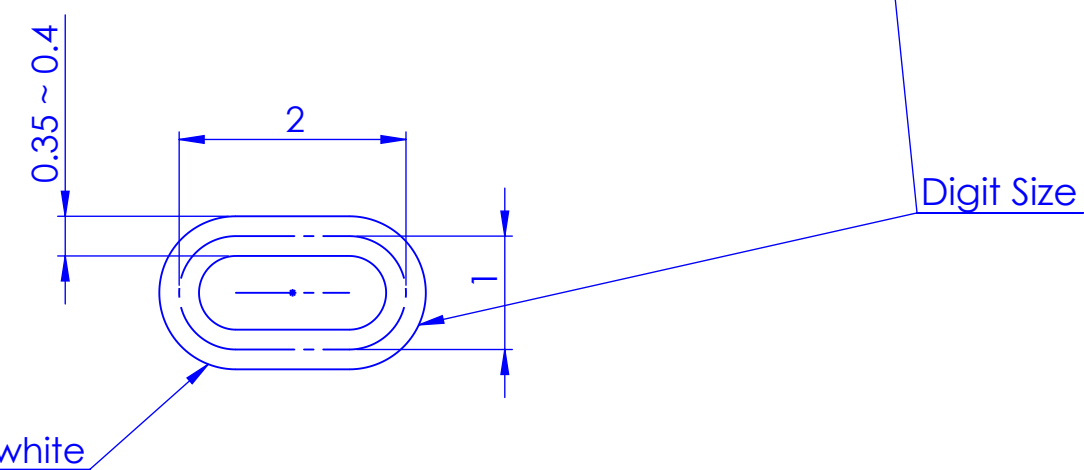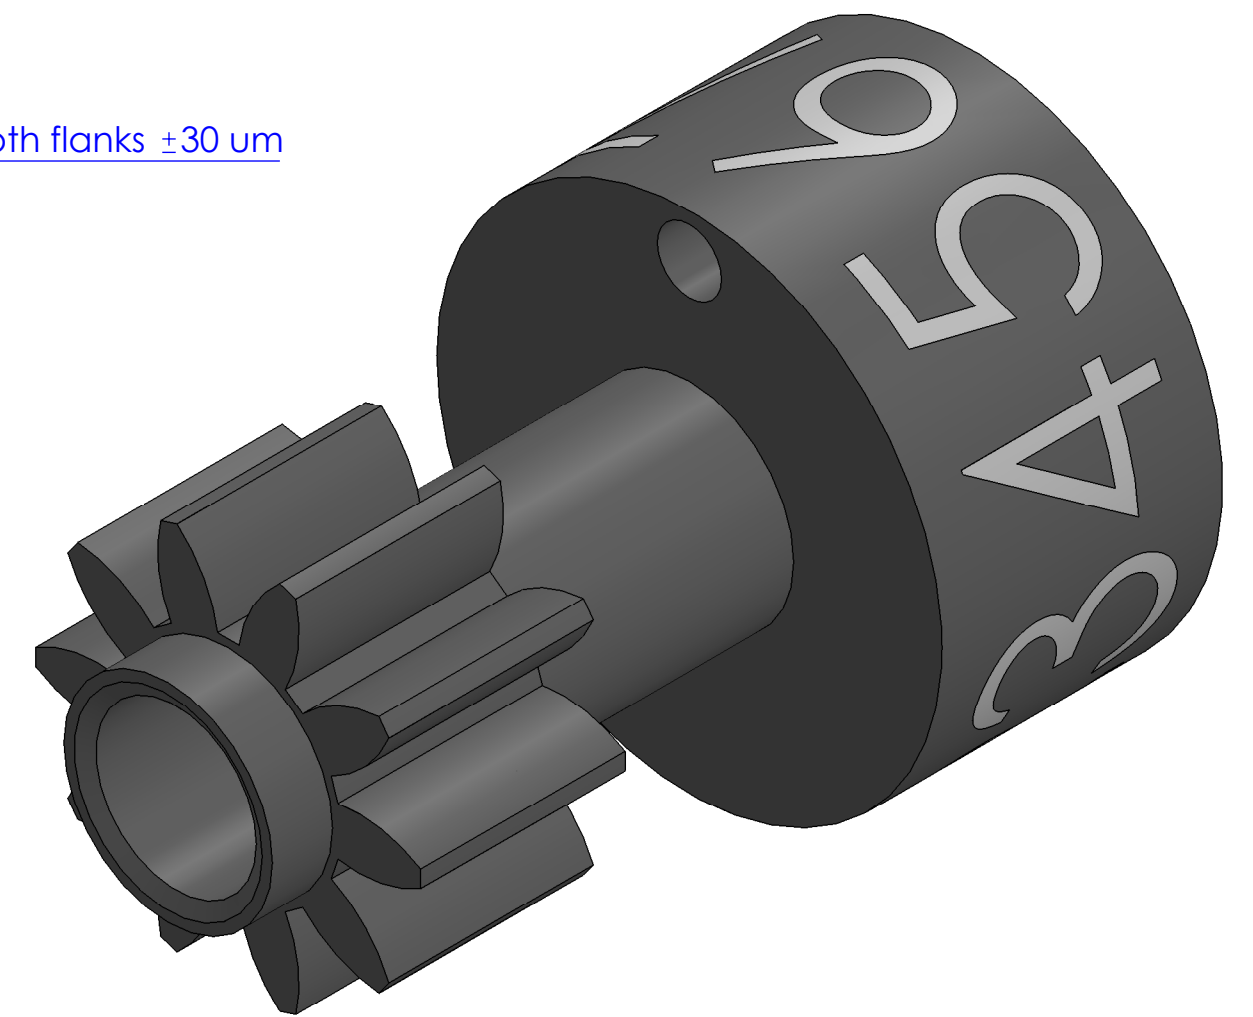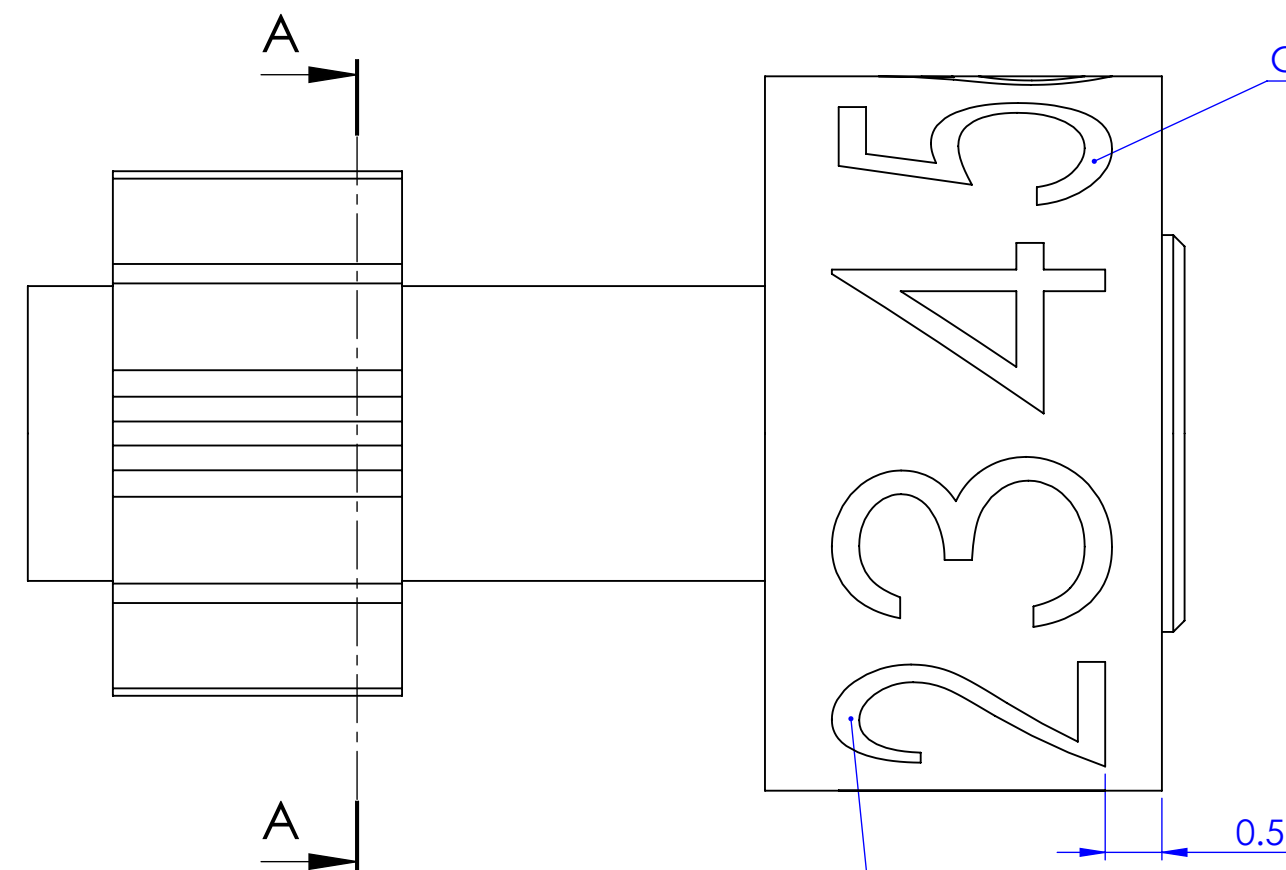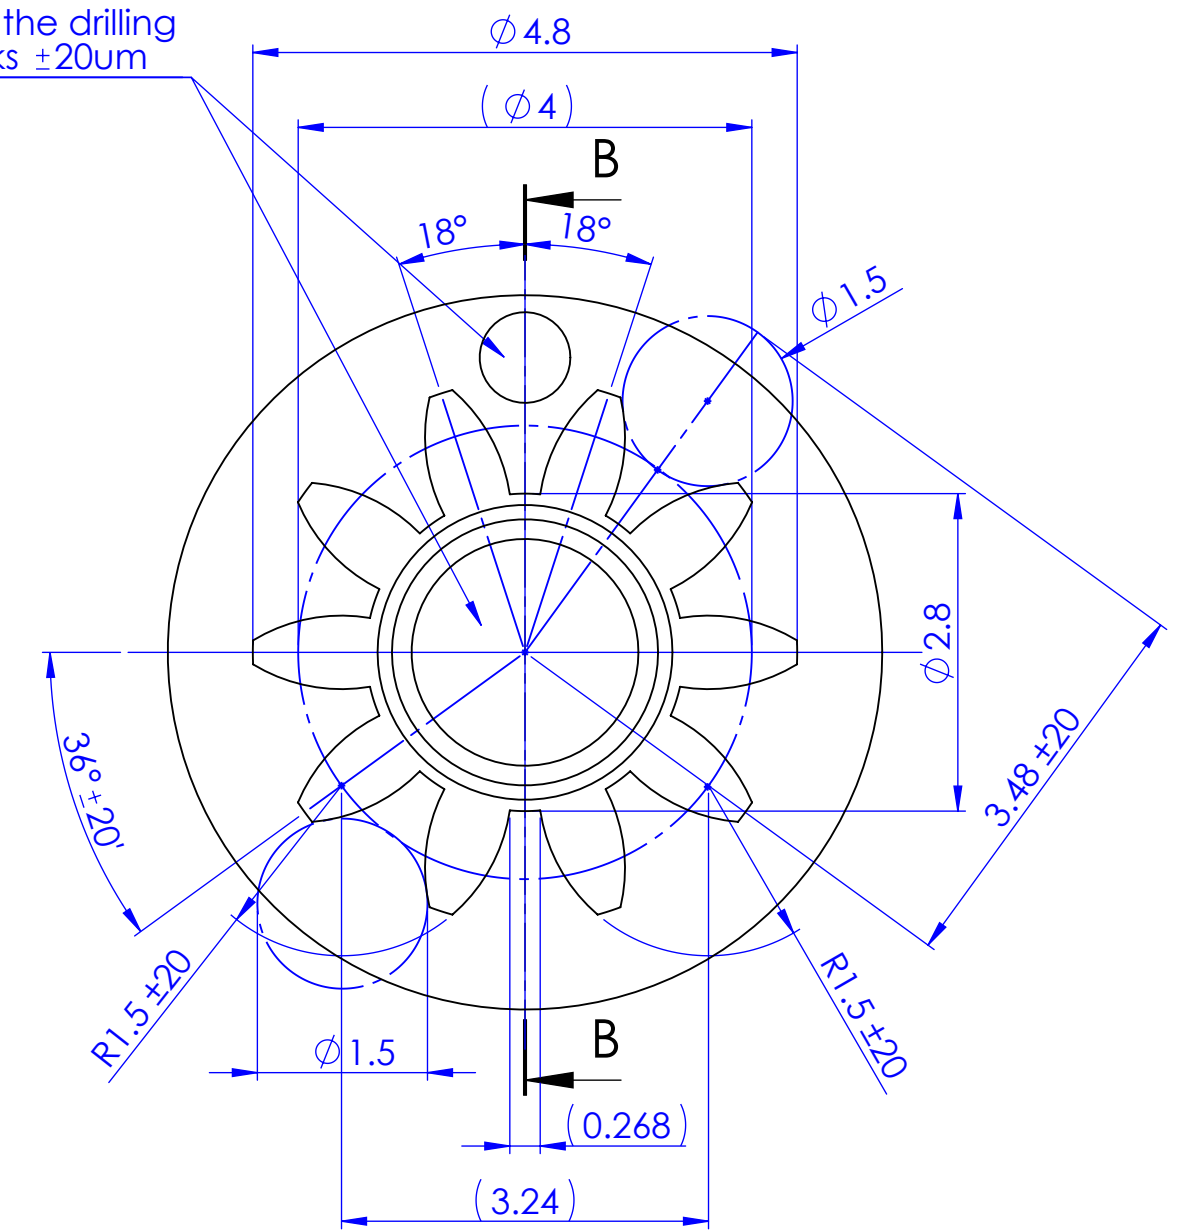
[illegible]


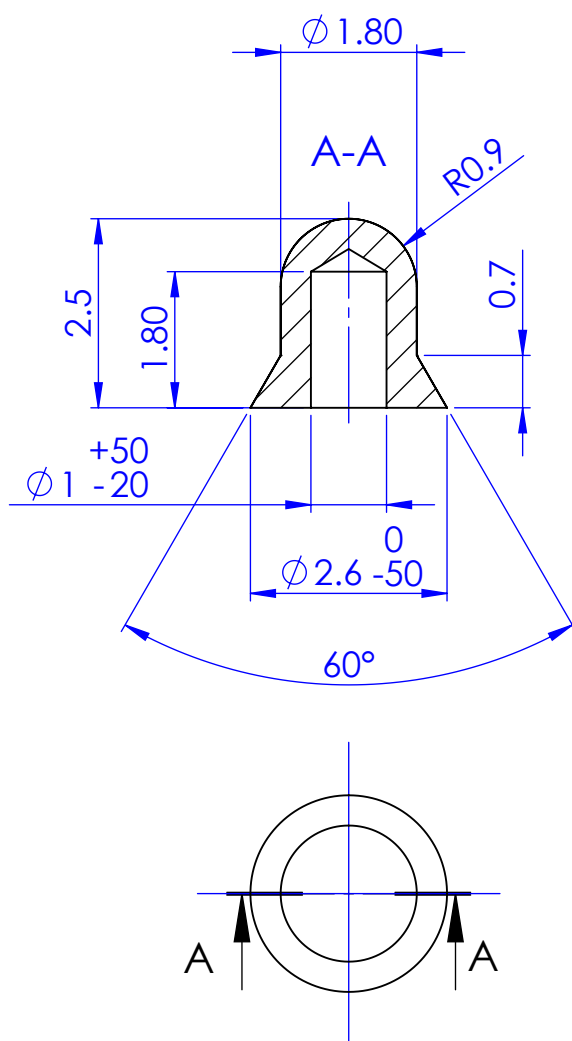


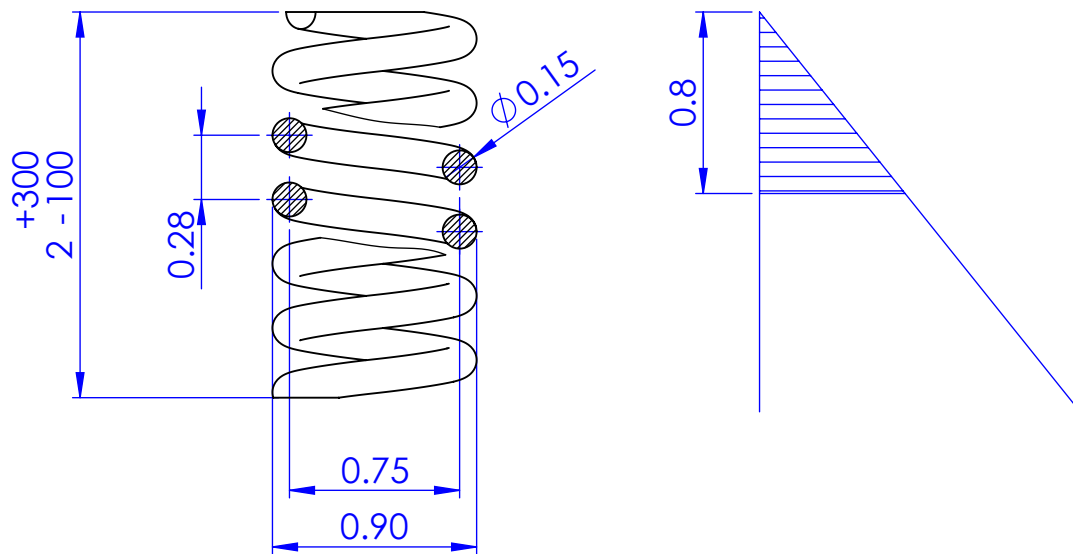


Active Turn= 4
End Turn = 2
Total Turn = 6
f/Turn = 0.145

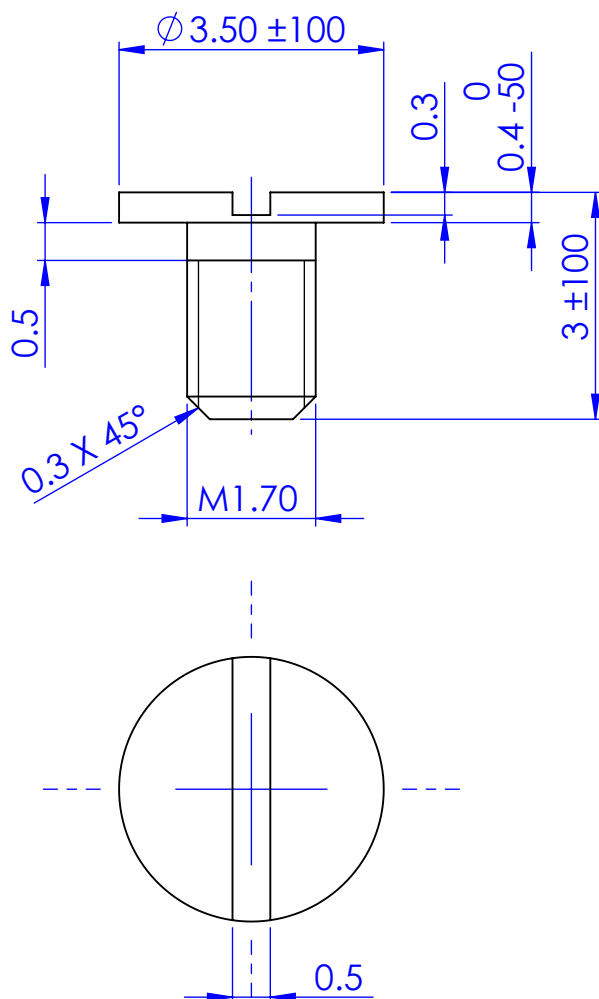


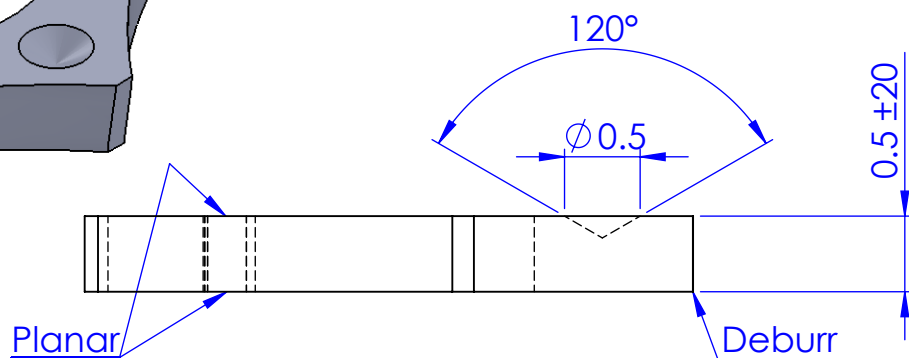
[illegible][illegible]

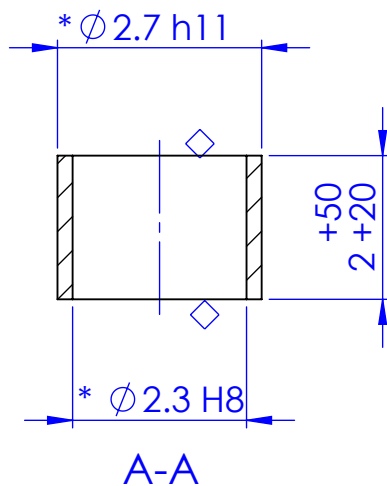
[illegible]

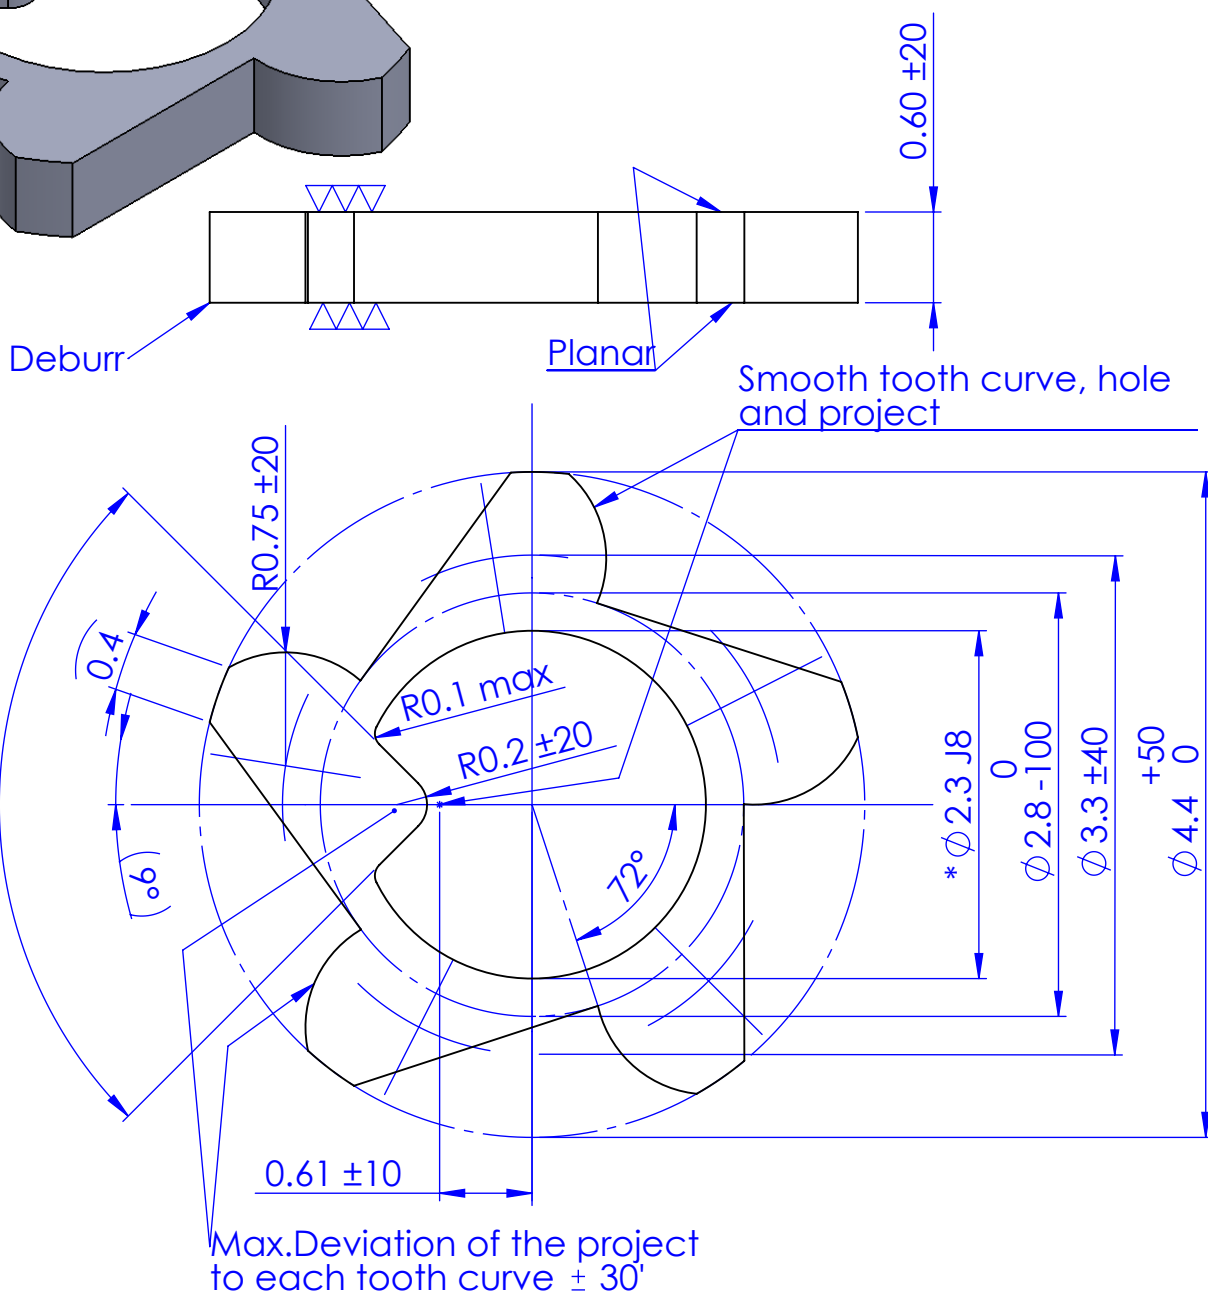


Dimension in bracket are auxiliary dimension without consideration of tolerance

[illegible]

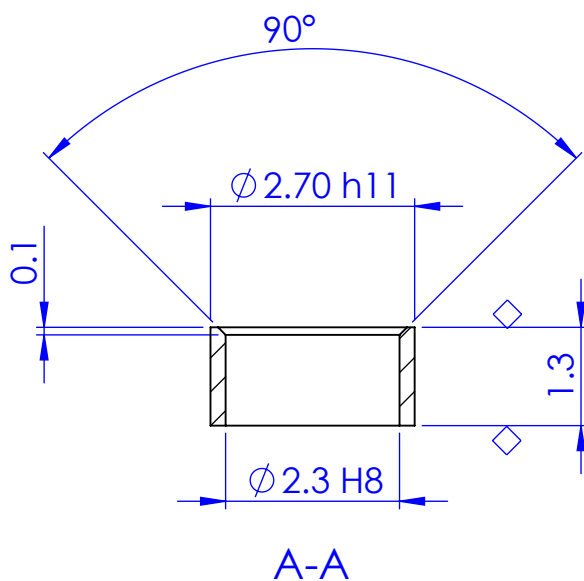[illegible]


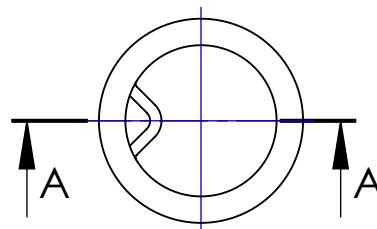


Centricity of the notch $\pm 20 \mu\text{m}$

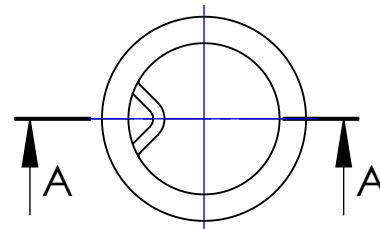



Centricity of the notch $\pm 20 \text{ } \mu\text{m}$


[illegible]

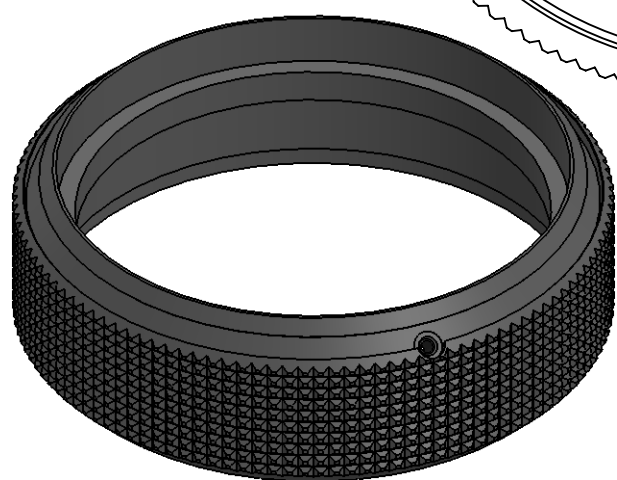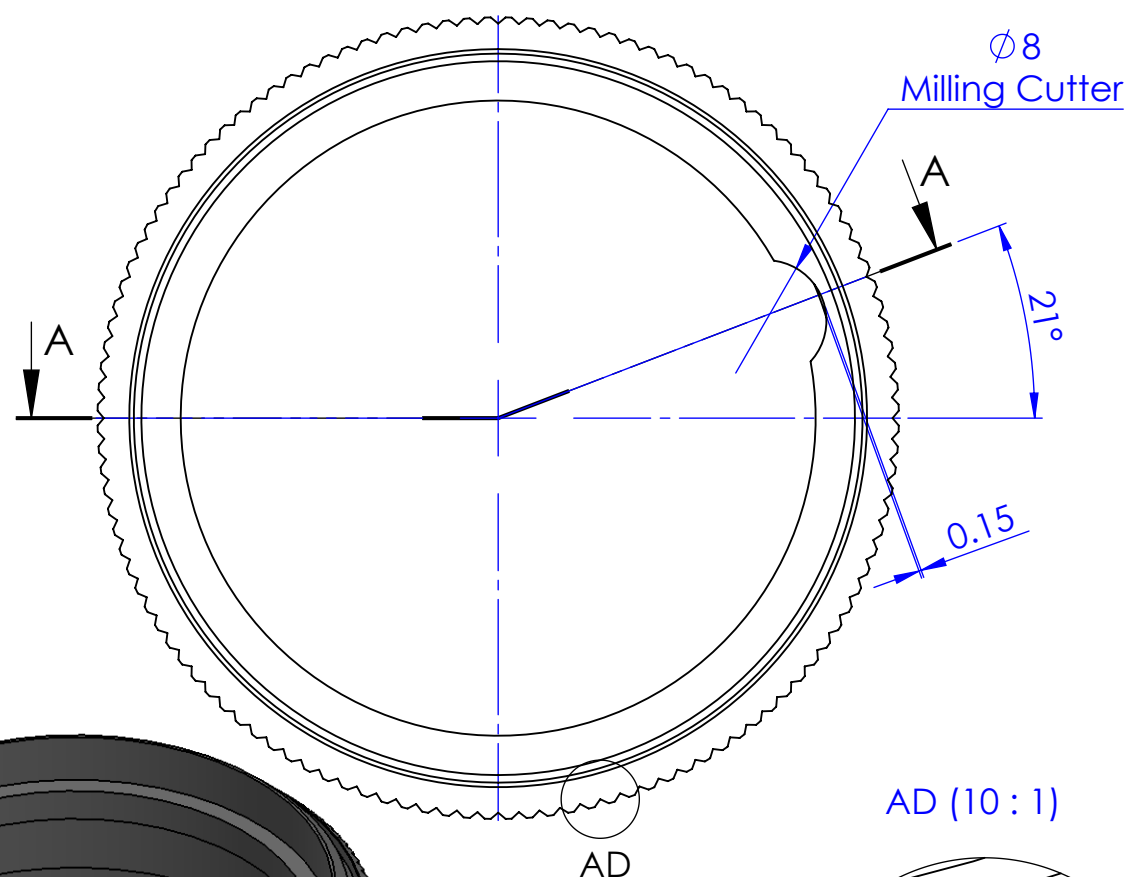





Dimension in bracket are auxiliary dimension without consideration of tolerance


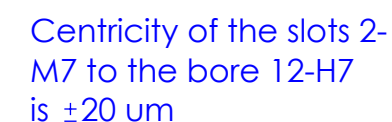


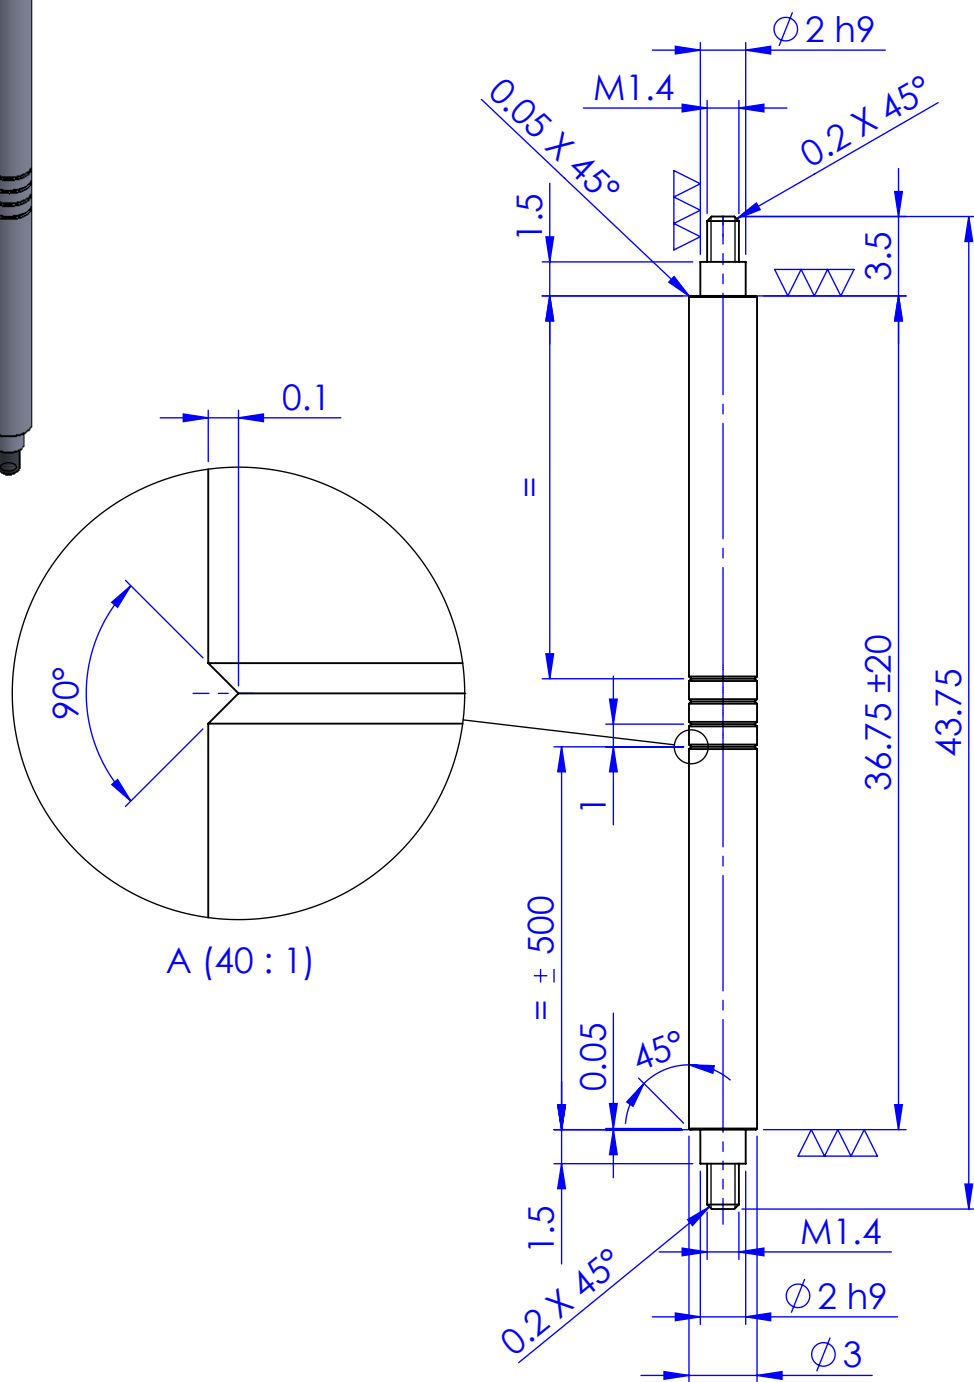
[illegible]

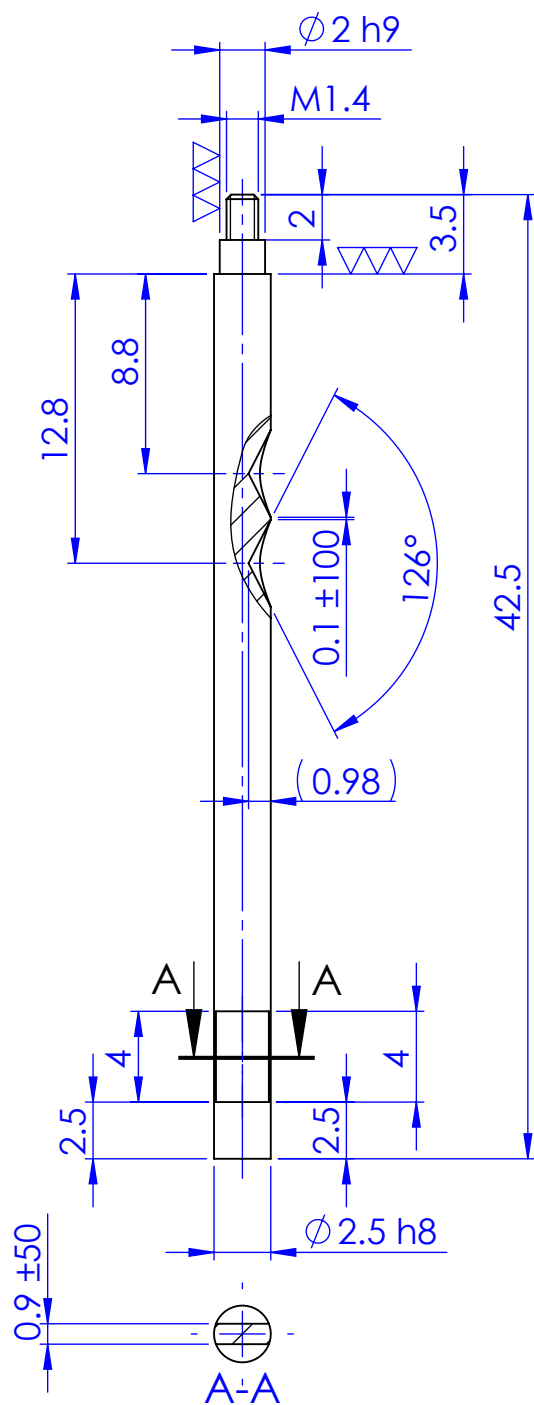


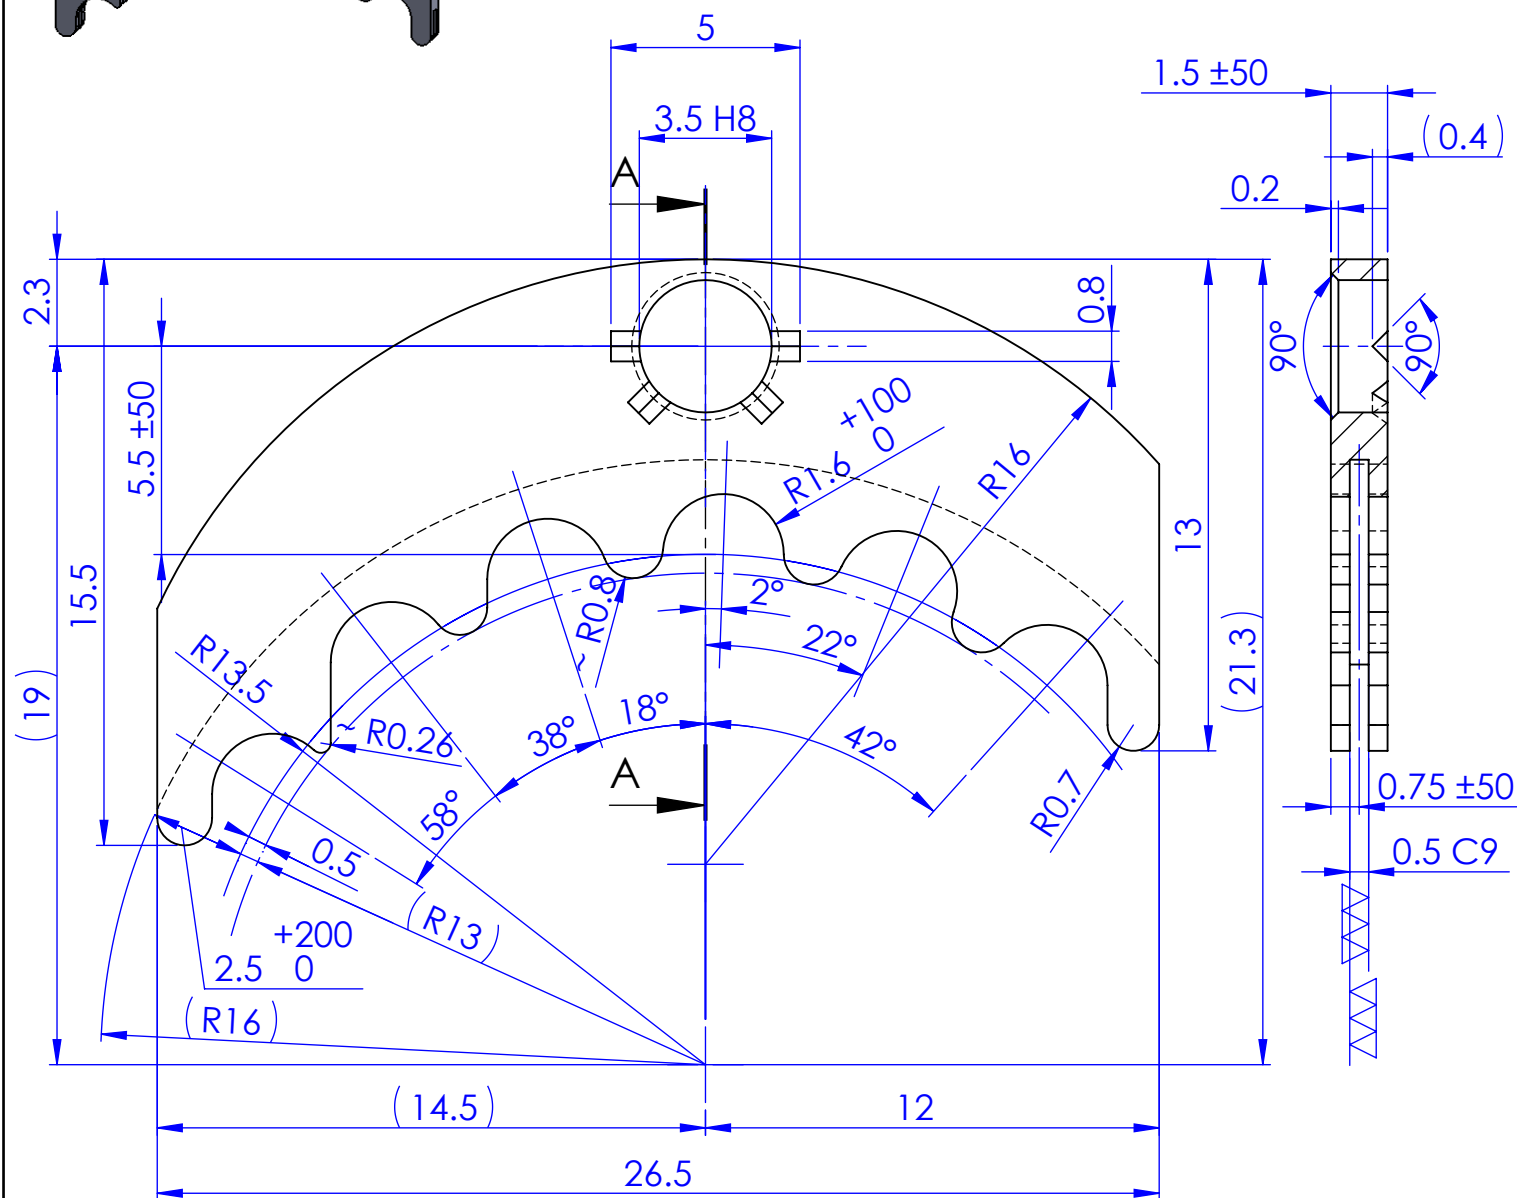


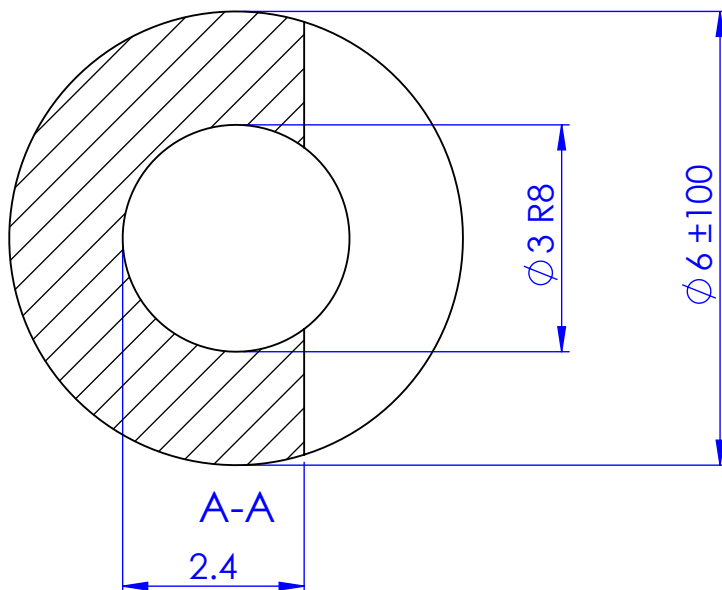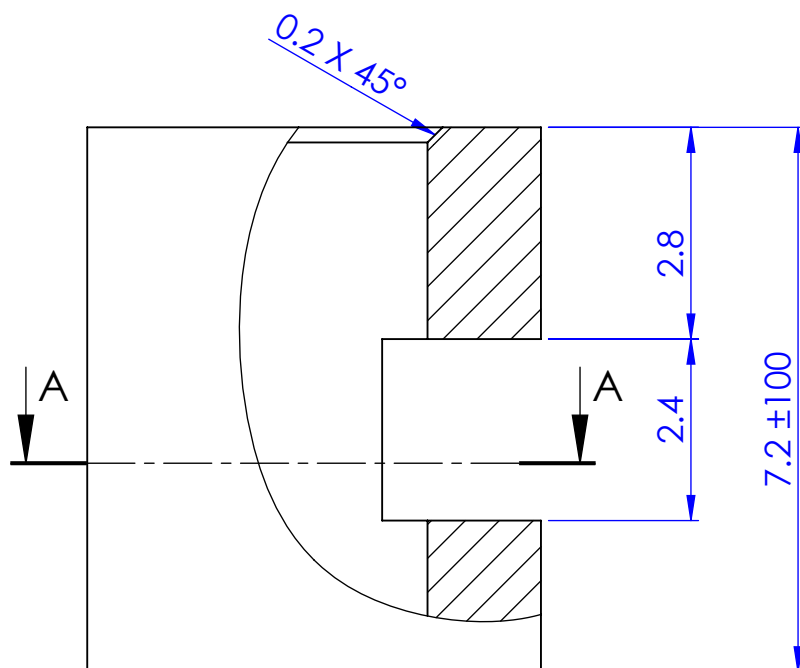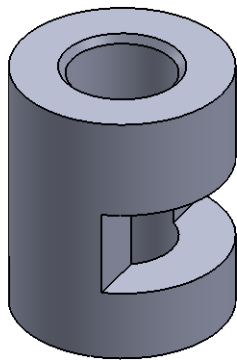

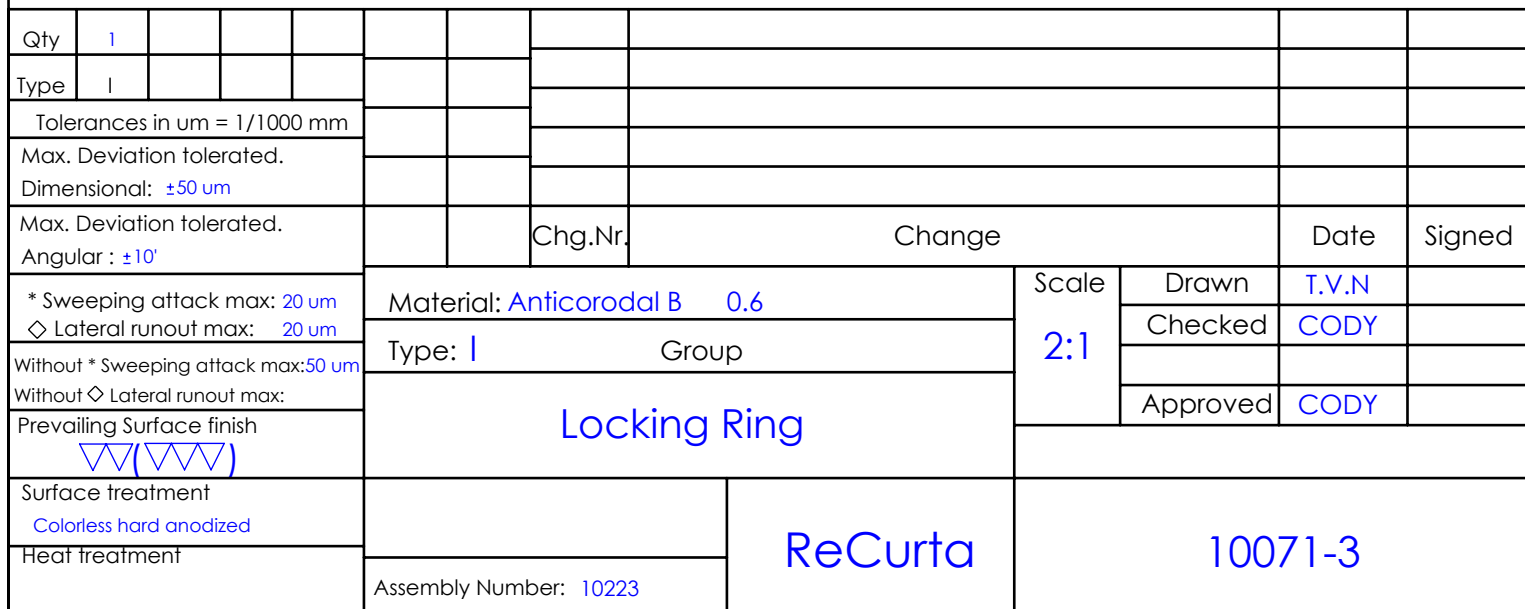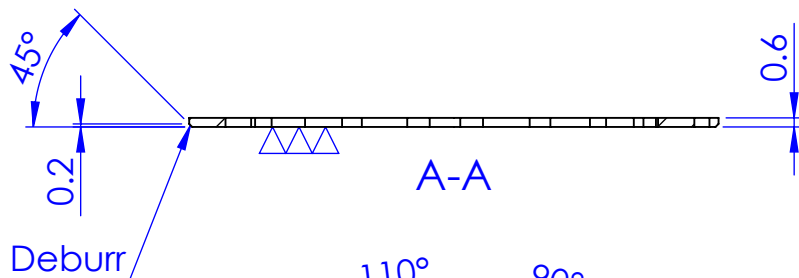






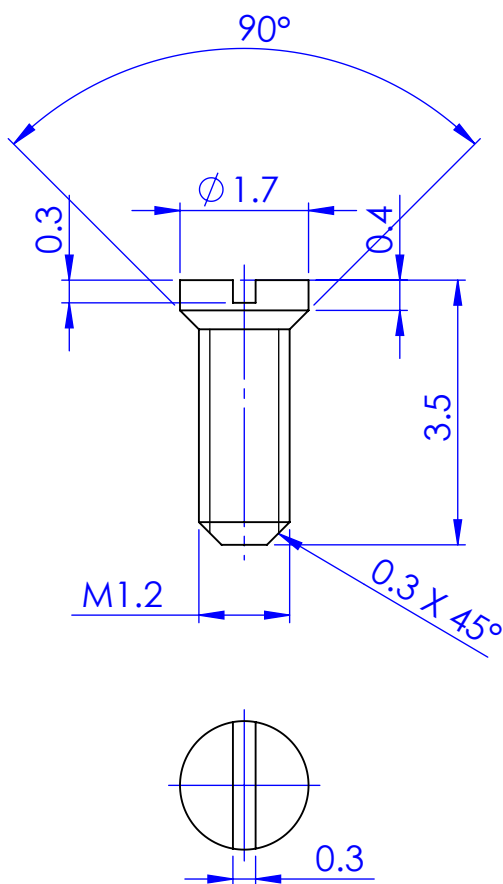


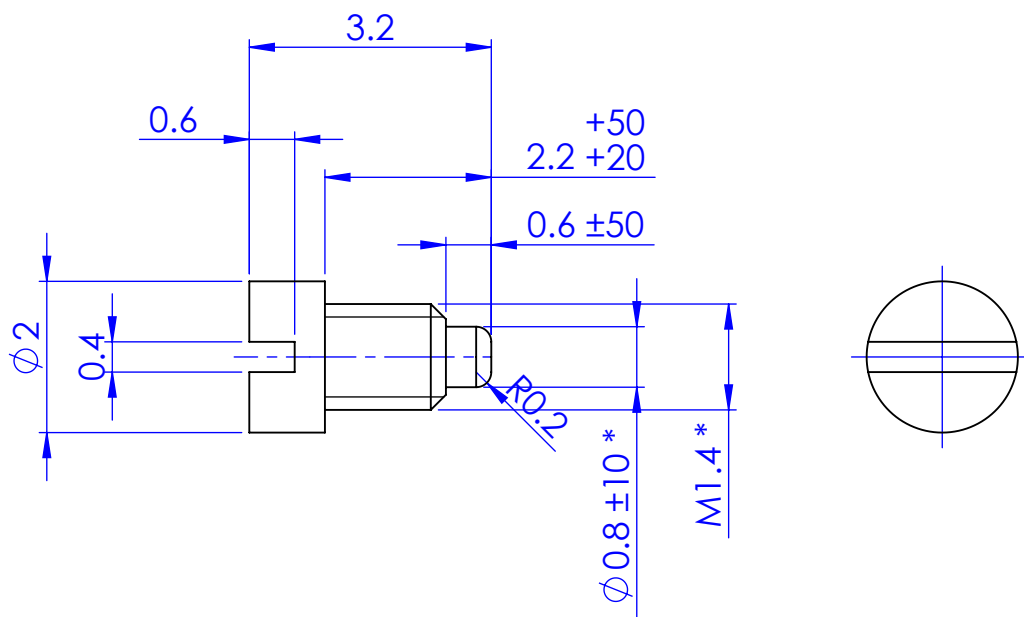



Qty	8													
Type	I													
Tolerances in um = 1/1000 mm														
Max. Deviation tolerated.														
Dimensional: ±100 um														
Max. Deviation tolerated.							Chg.Nr.	Change				Date	Signed	
Angular : -					Material: So Ms 58 Mn Ø 2 Type: I									

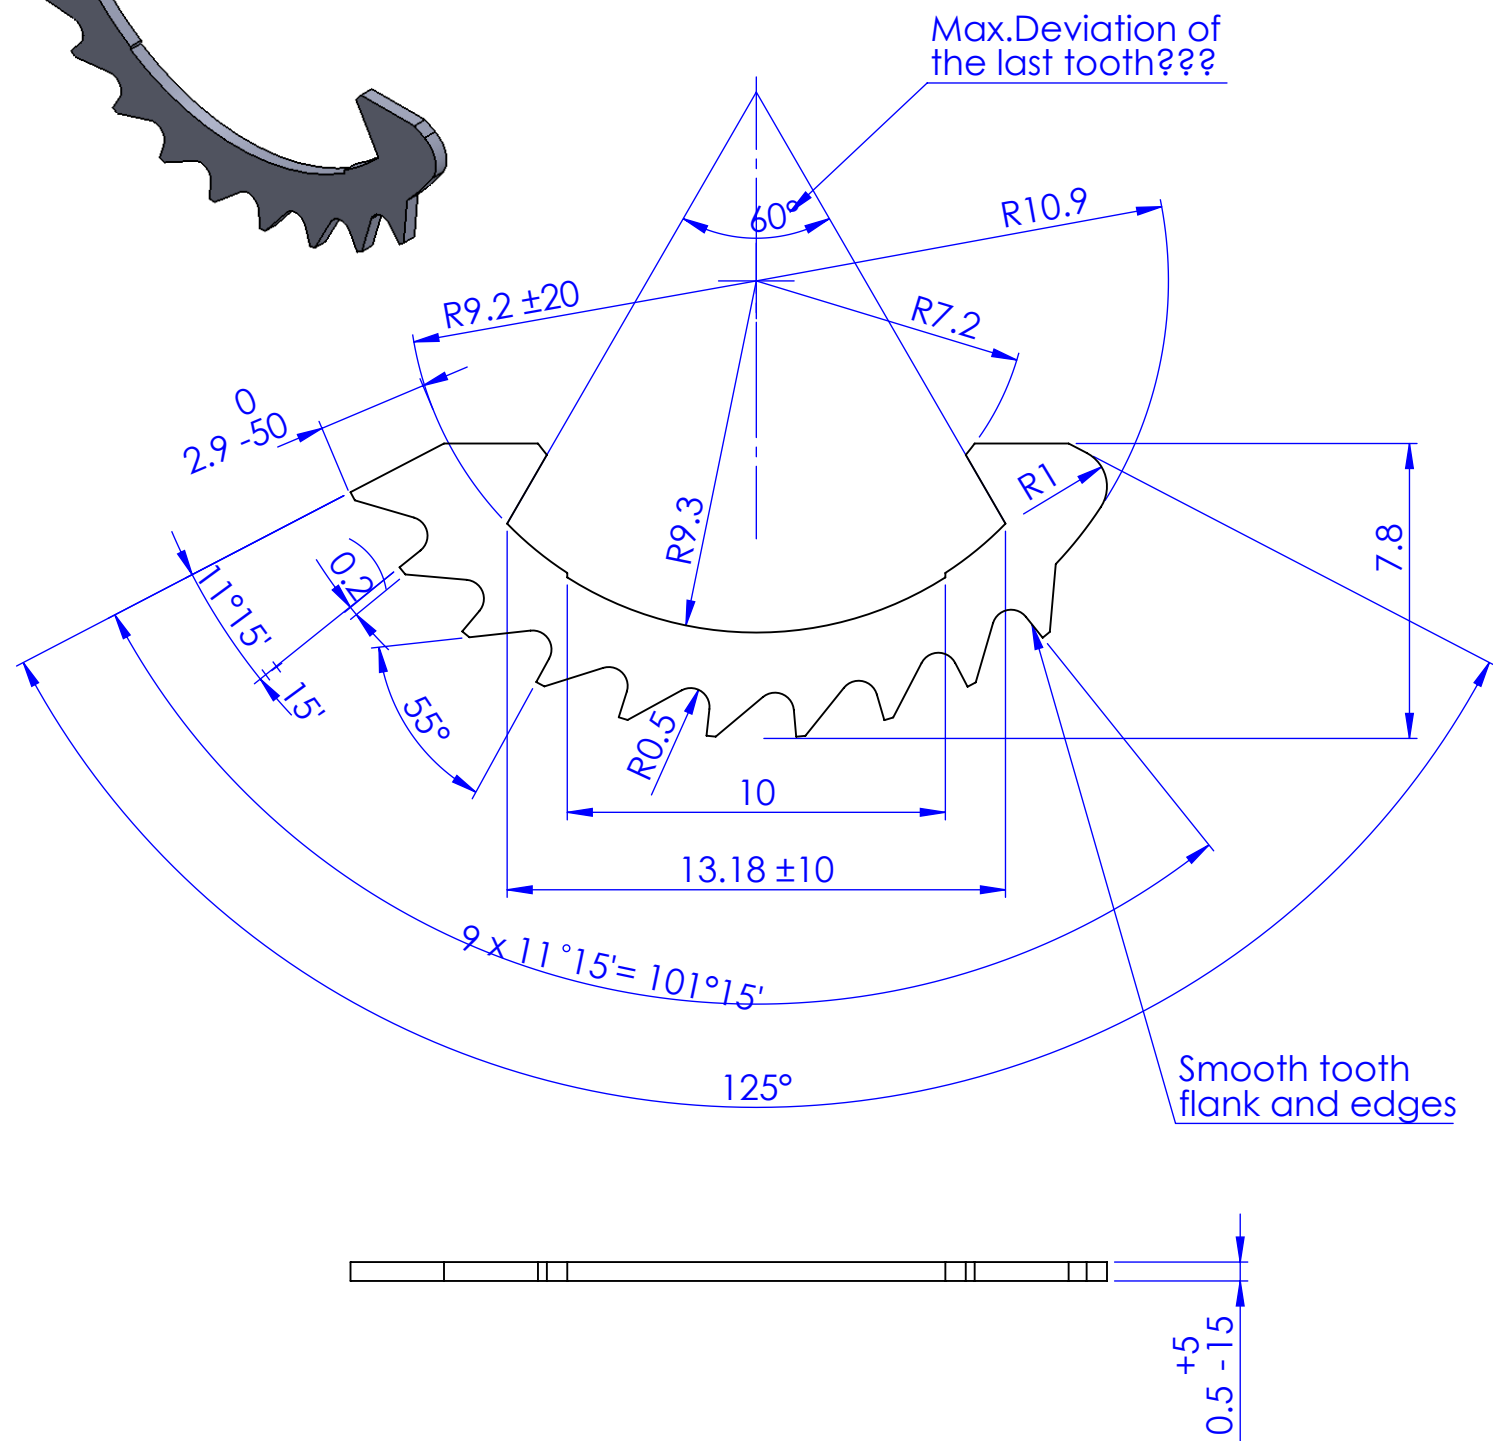


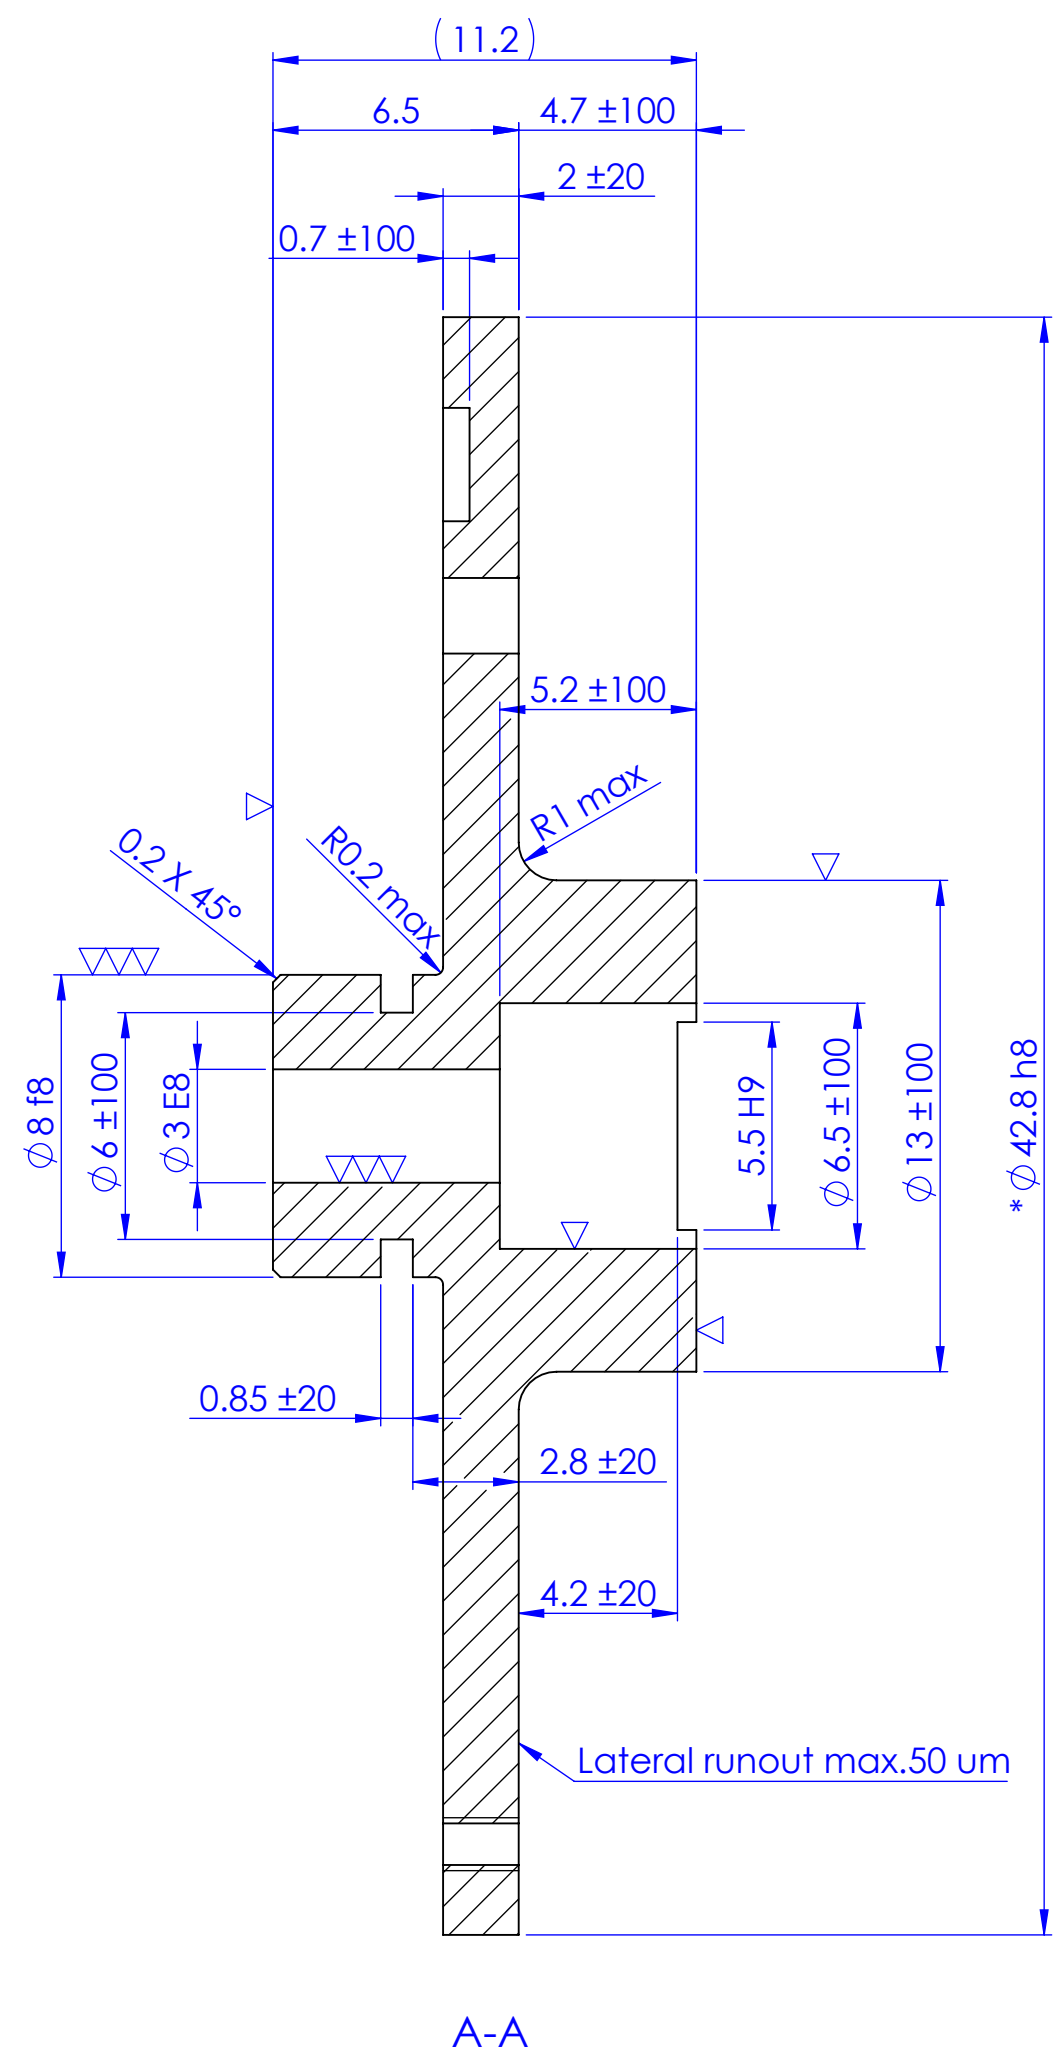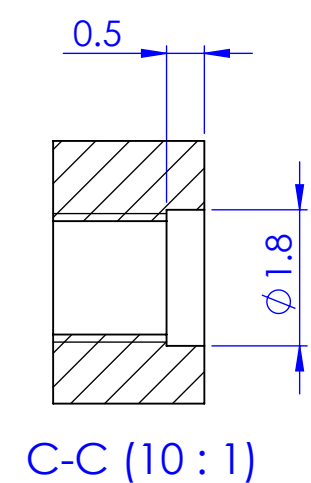


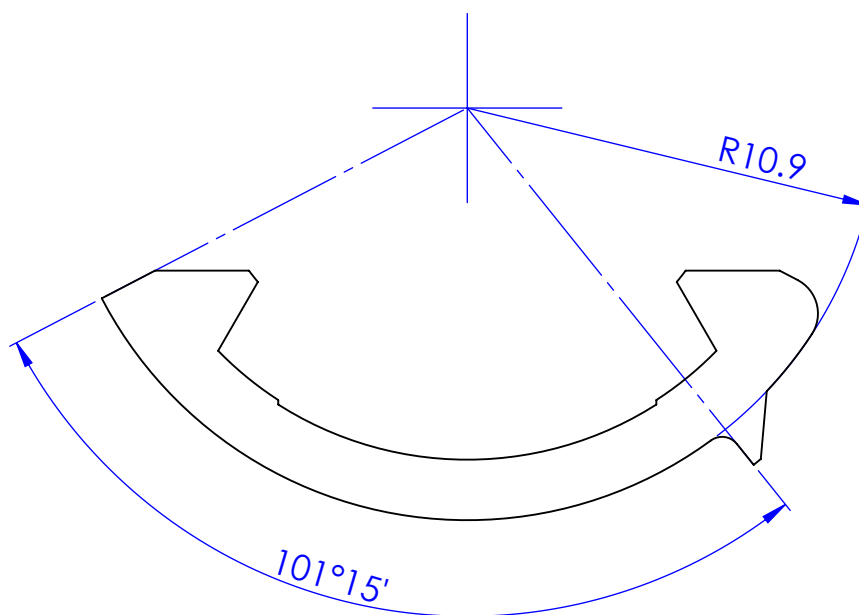


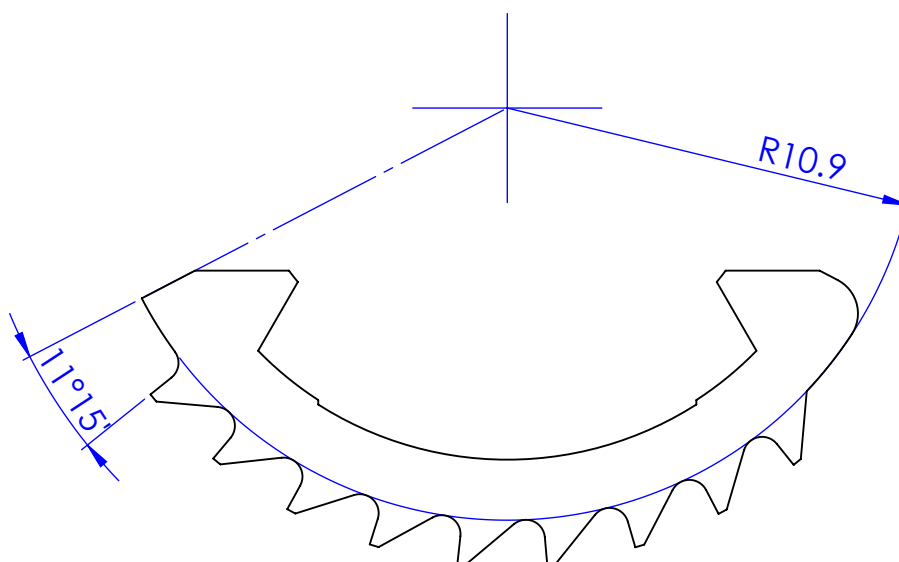


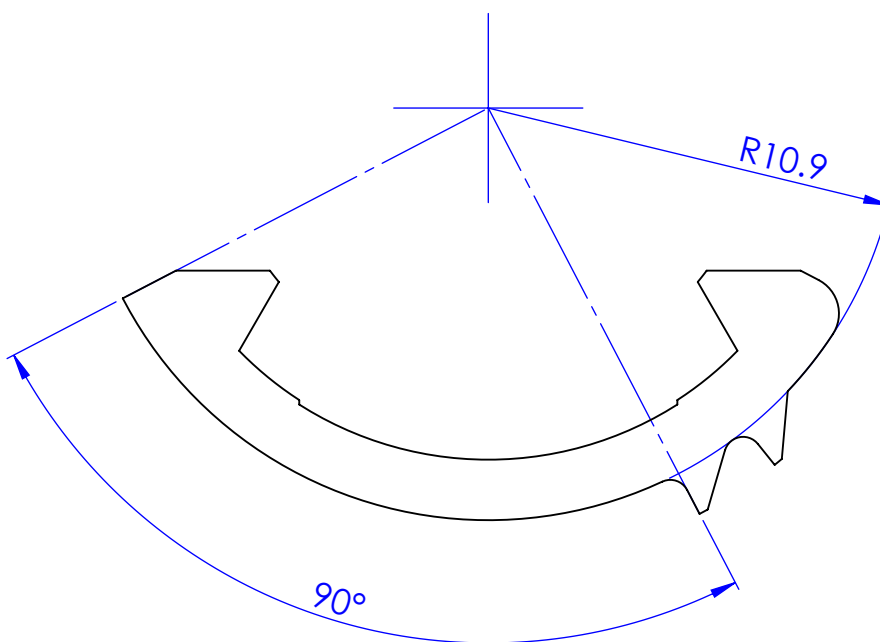


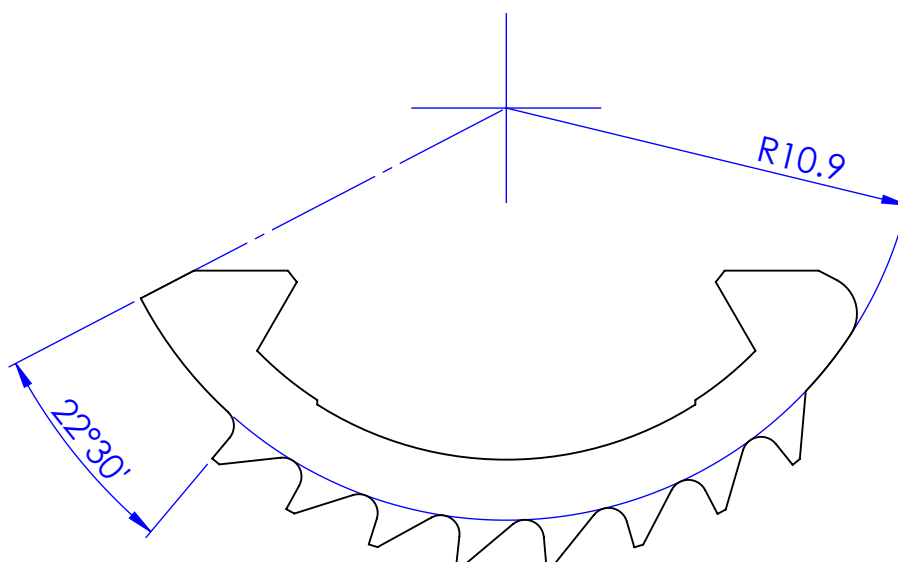


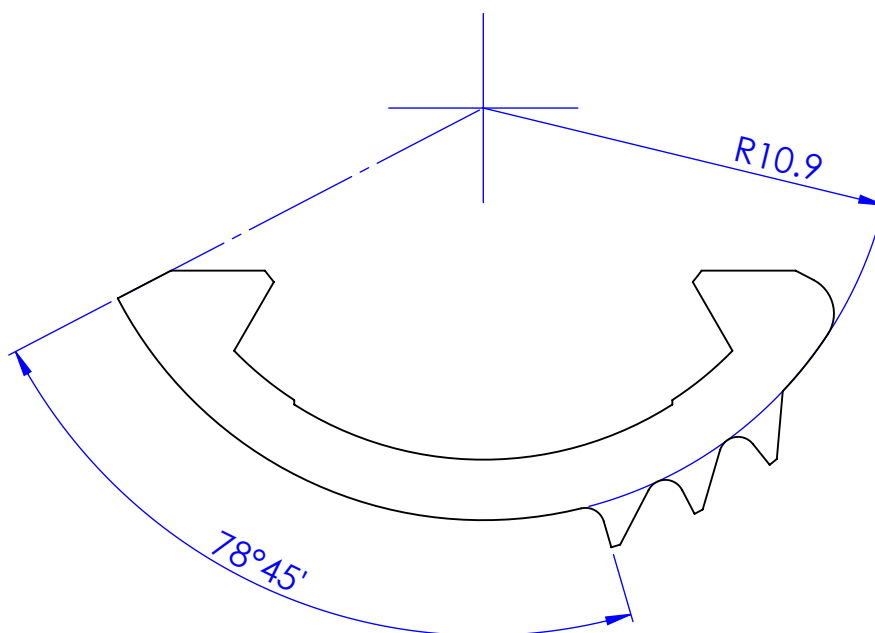



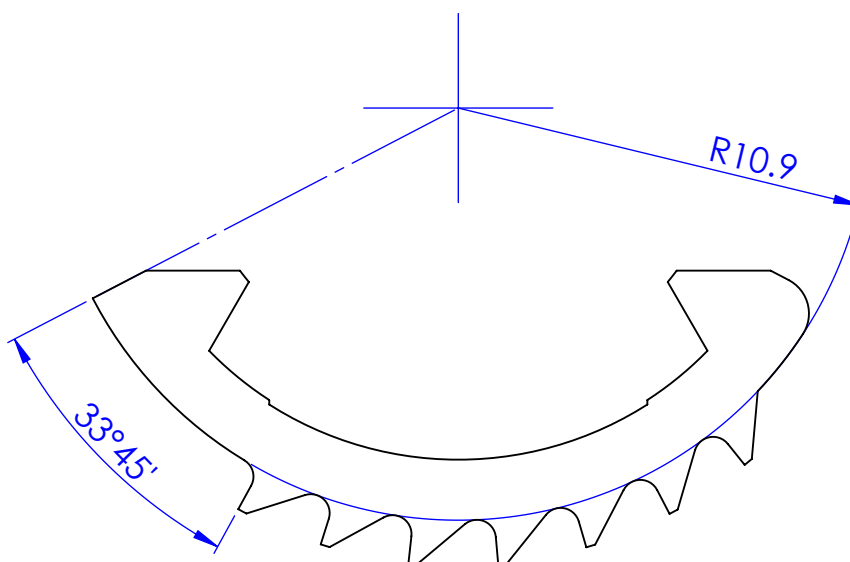


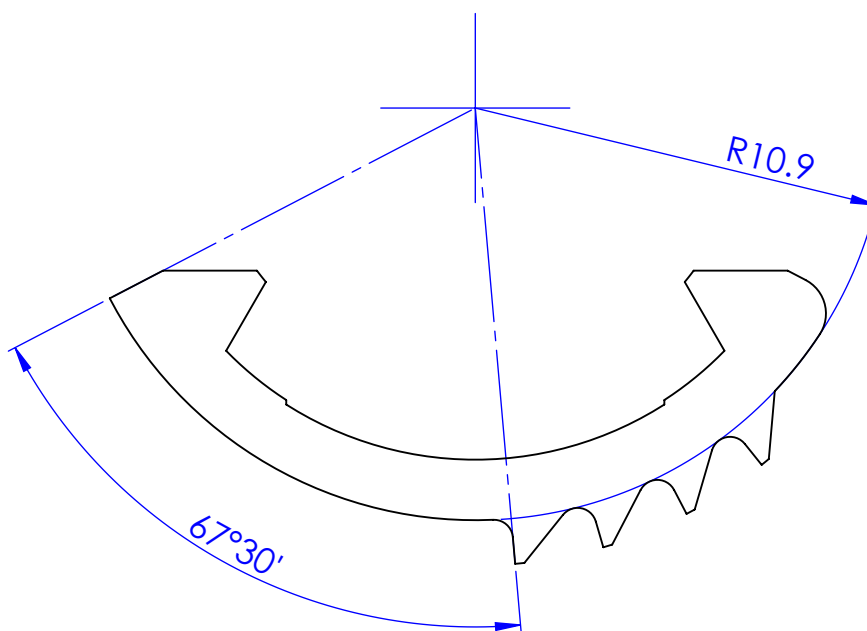


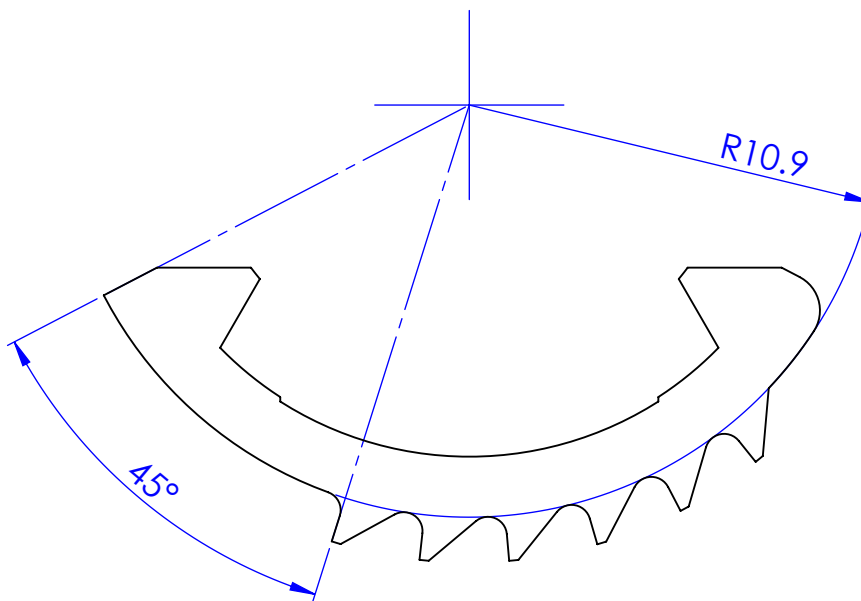

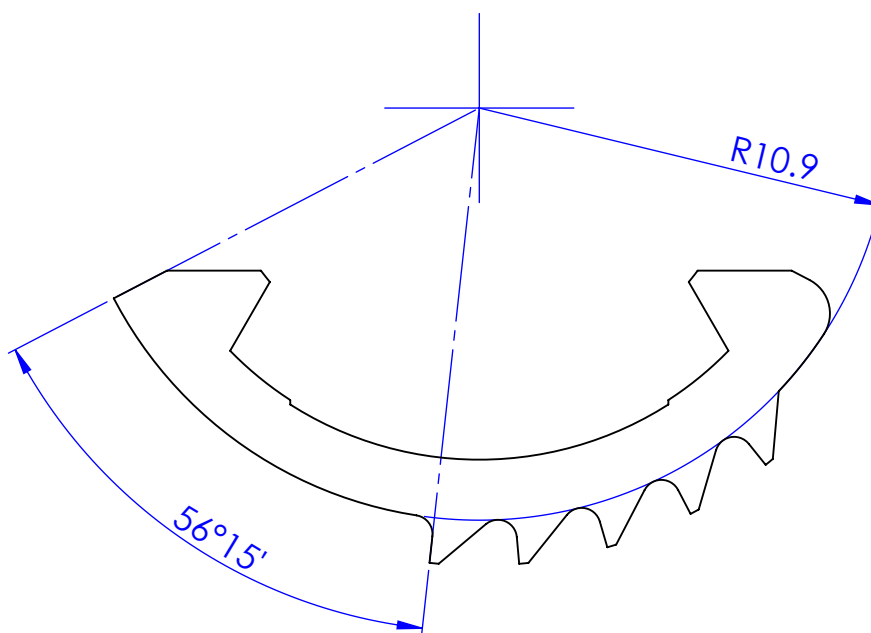

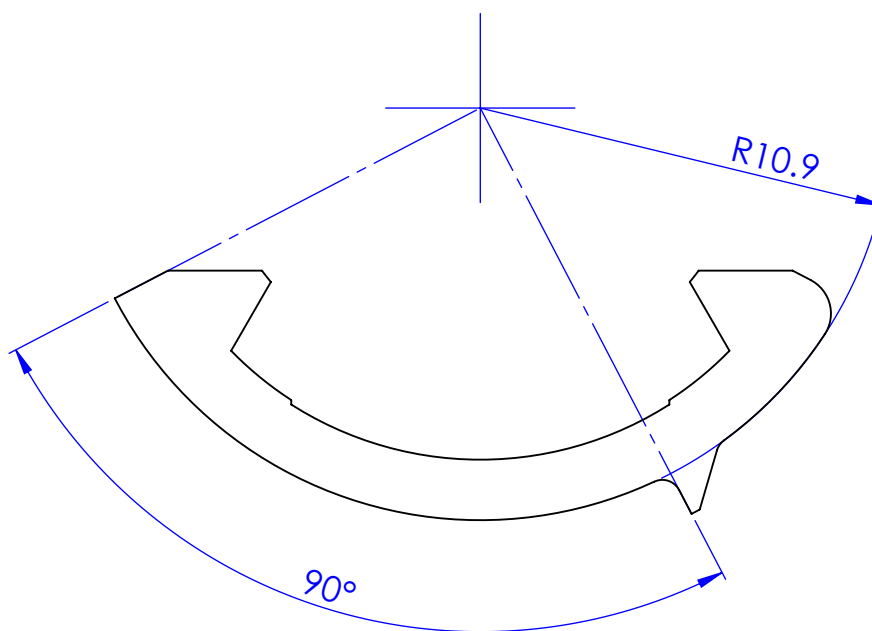
[illegible]

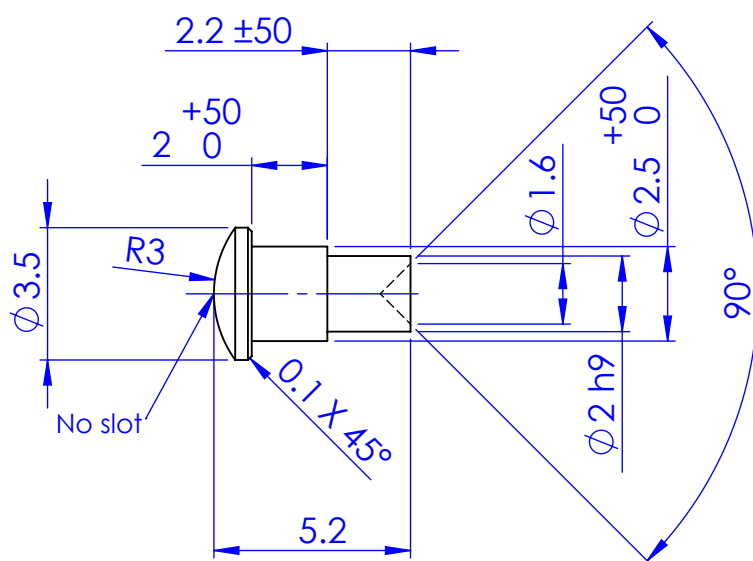
[illegible]

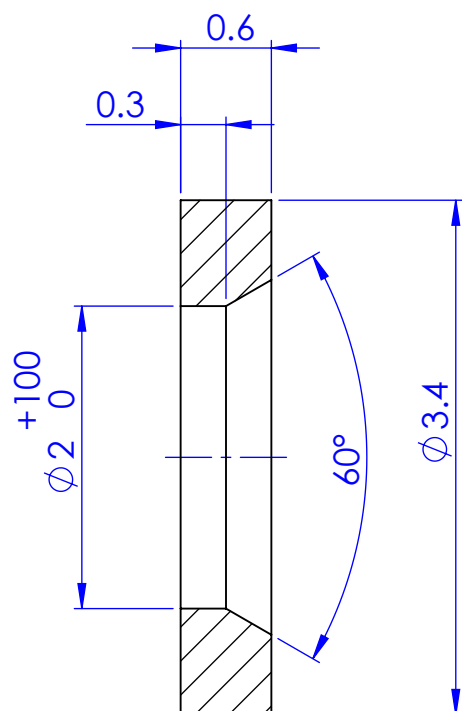


A diagram showing a circular cross-section of a pipe. A vertical line passes through the center of the pipe. At the top and bottom of the pipe, the line has arrows pointing away from the center, labeled 'A'. This represents a vertical line with tension forces at both ends.


[illegible]

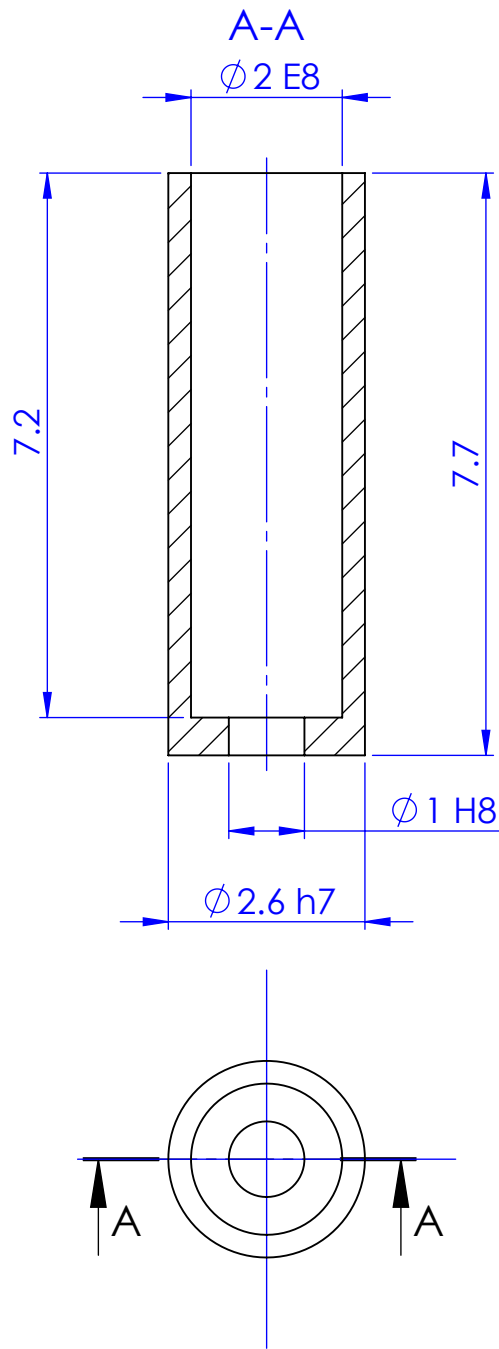
[illegible]

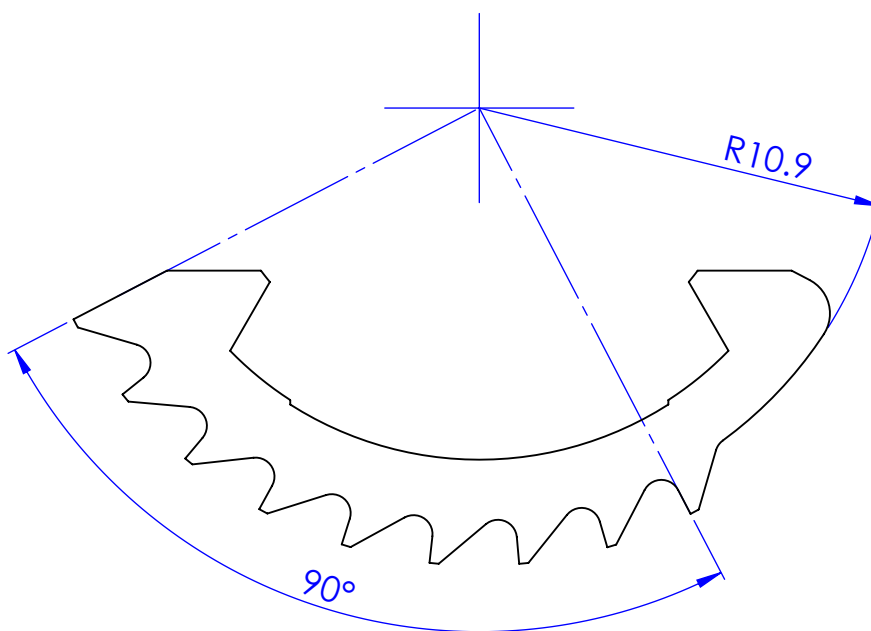[illegible]

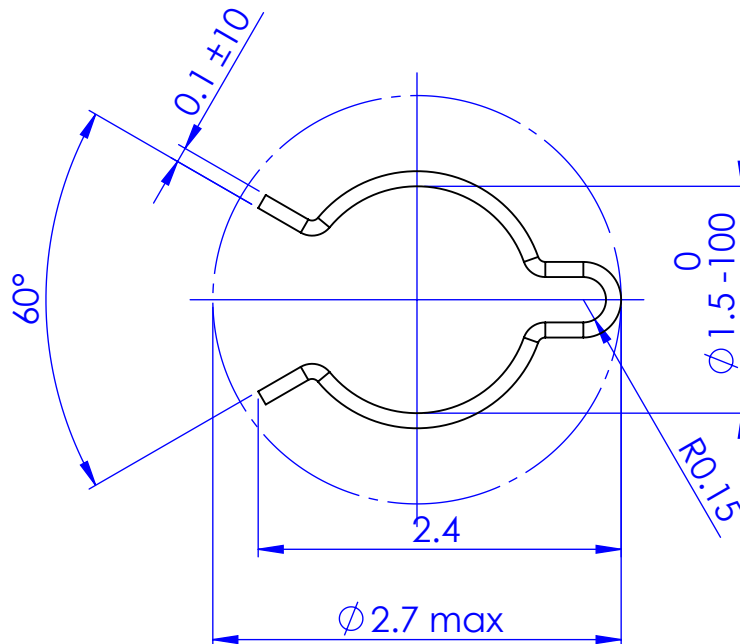


Qty	9														
Type	I														
Tolerances in um = 1/1000 mm															
Max. Deviation tolerated.															
Dimensional: ±50 um															
Max. Deviation tolerated.								Chg.Nr.				Change	Date	Signed	
Angular : -															
* Sweeping attack max: ◇ Lateral runout max:						Material: Federbandst 0.1						Scale 20:1	Drawn	T.V.N	
						Type: I Group							Checked	CODY	
Without * Sweeping attack max:						Circlip For Counter Gear									
Without ◇ Lateral runout max:												Approved	CODY		
Prevailing Surface finish															
Surface treatment Nickel						ReCurta				10097-5					
Heat treatment Cured(Spring hard)															
Assembly Number: 10233/2500															

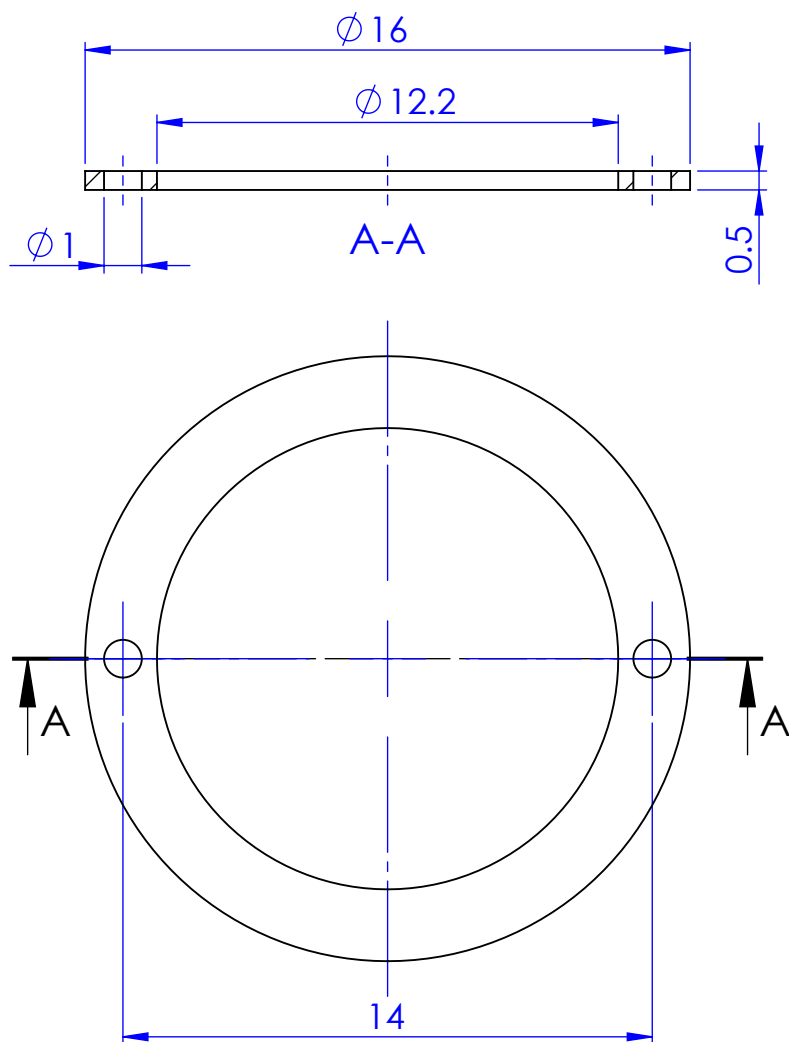[illegible]


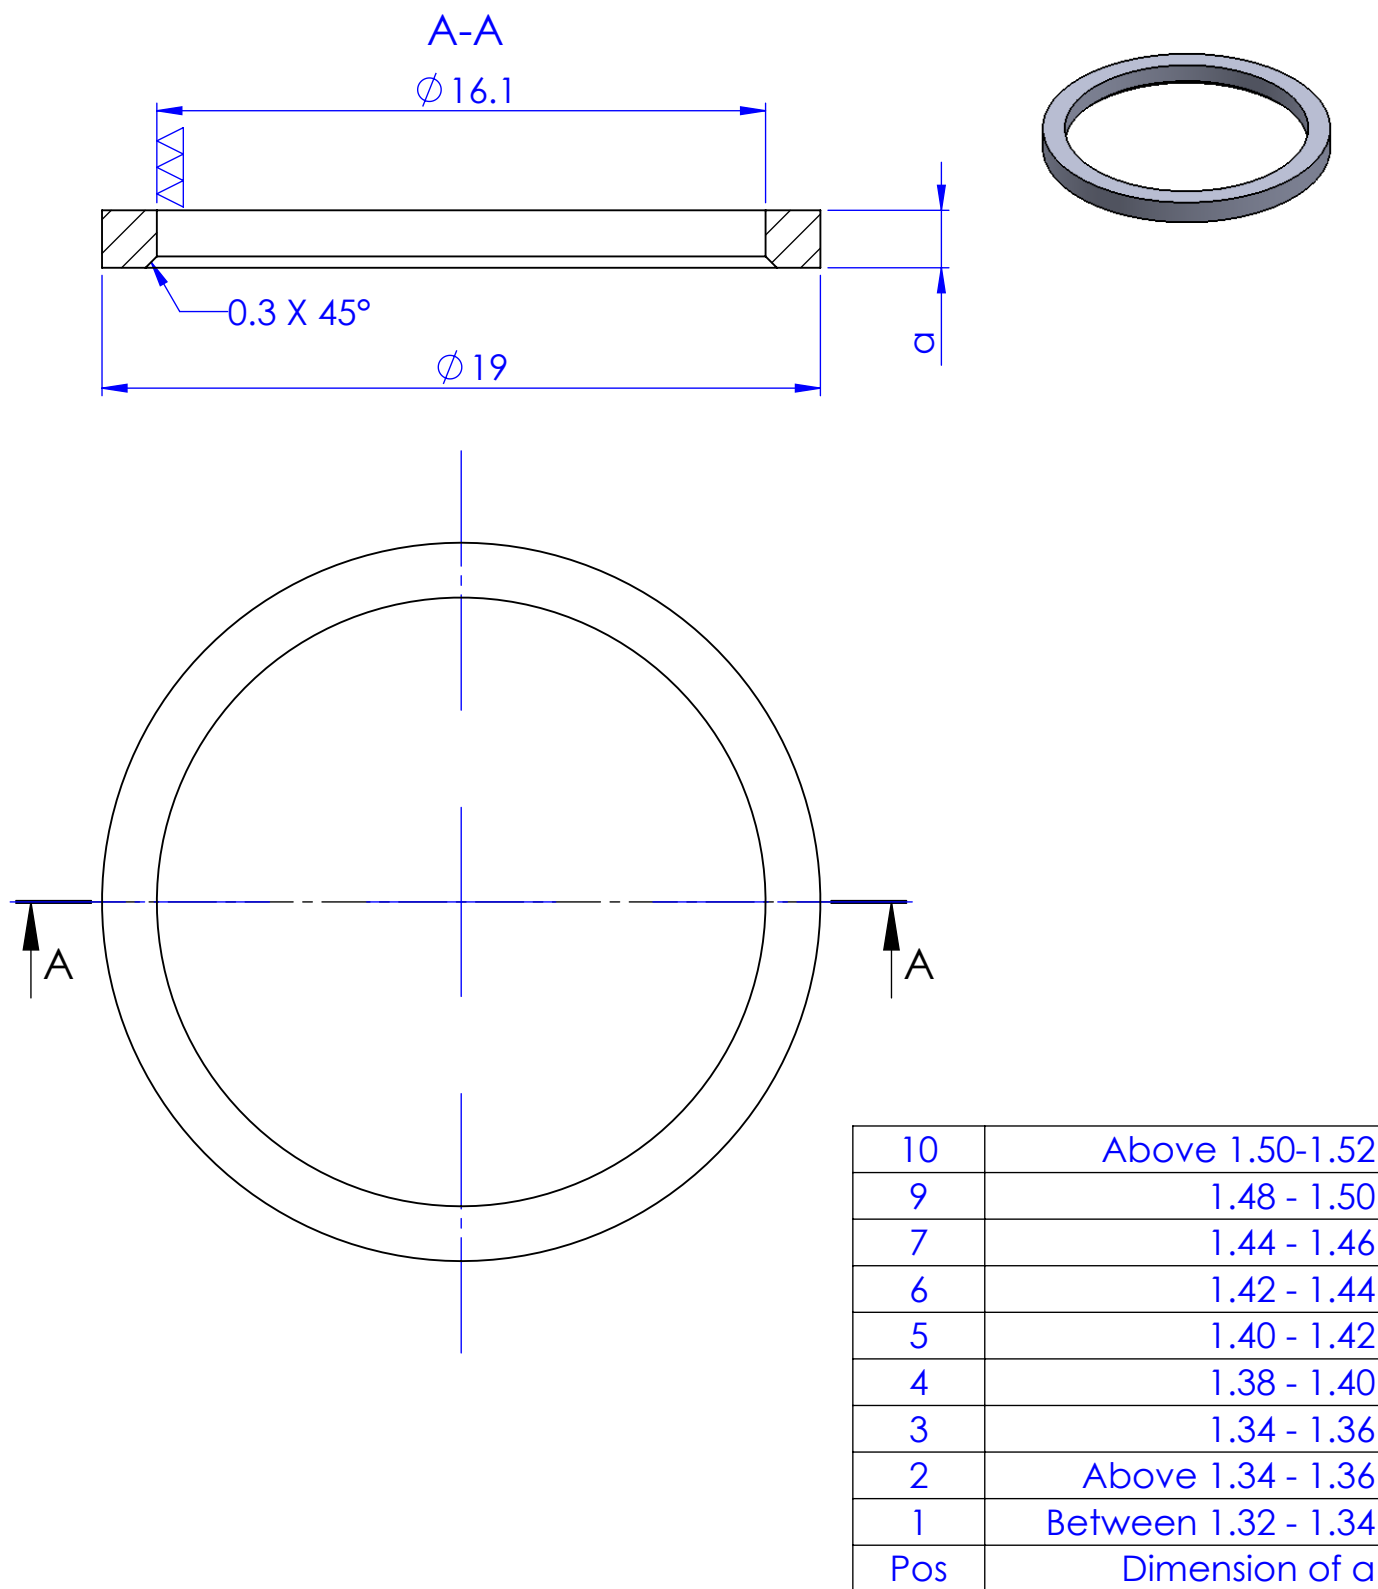




Qty	1												
Type	I												
Tolerances in $\mu\text{m} = 1/1000 \text{ mm}$													
Max. Deviation tolerated.													
Dimensional: $\pm 50 \mu\text{m}$													
Max. Deviation tolerated.													
Angular :-						Chg.Nr.	Change			Date	Signed		
* Sweeping attack max:						Material: Anticorodalrohl B 20/2.5				Scale 5:1	Drawn	T.V.N	
◇ Lateral runout max:						Type: I Group					Checked	CODY	
Without * Sweeping attack max:						Clearing Plate Distance Ring							
Without ◇ Lateral runout max:											Approved	CODY	
Prevailing Surface finish $\nabla\nabla\nabla(\nabla\nabla)$													
Surface treatment Black Anodised								ReCurta		10099-2			
Heat treatment -						Assembly Number: 10210							

[illegible]

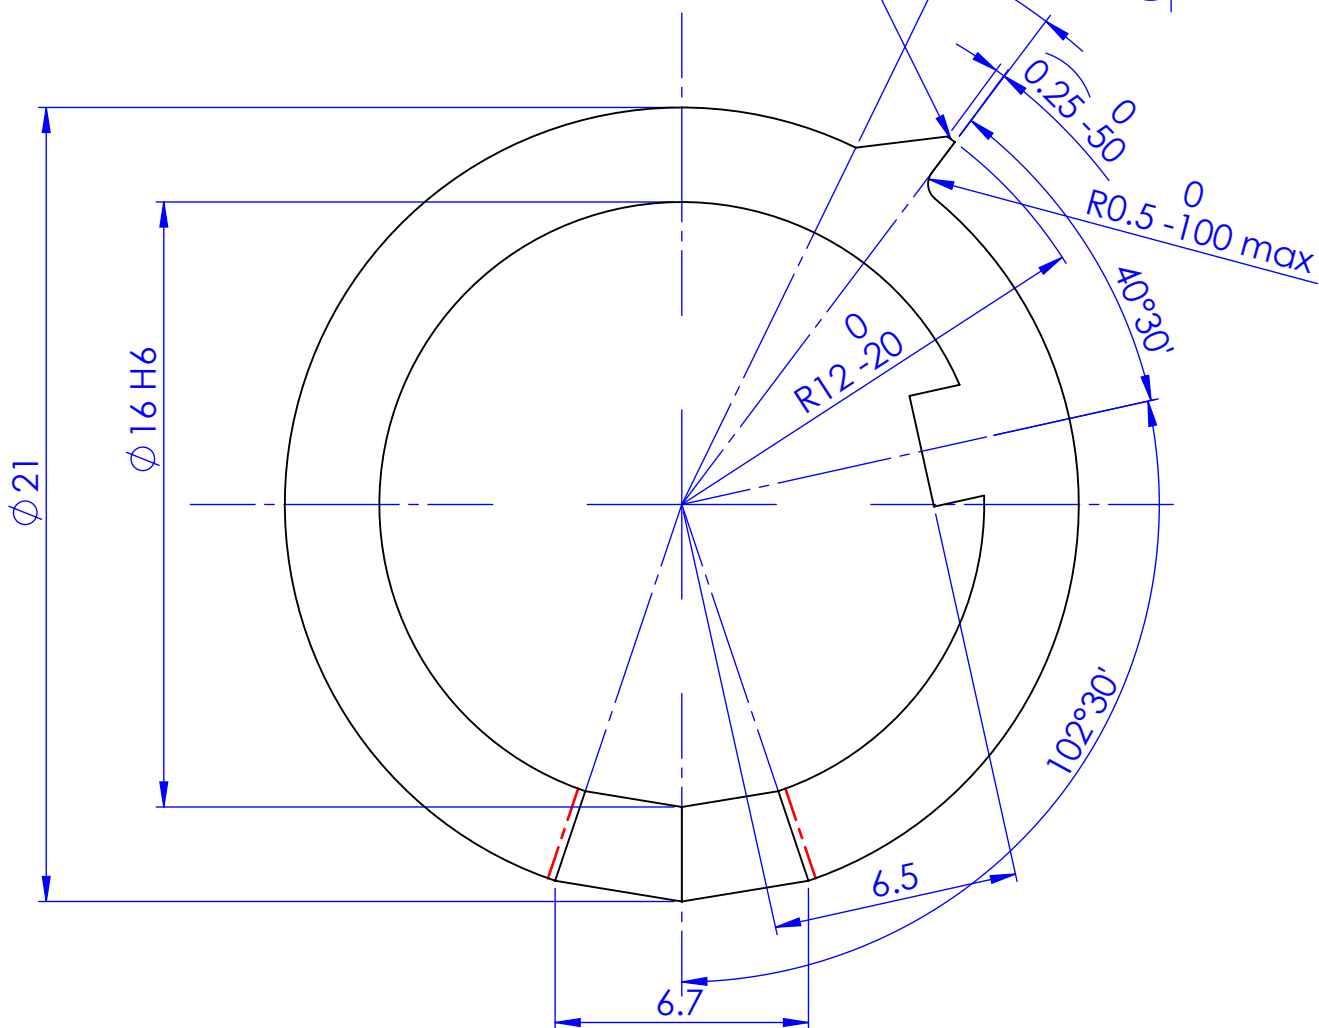


10101-5

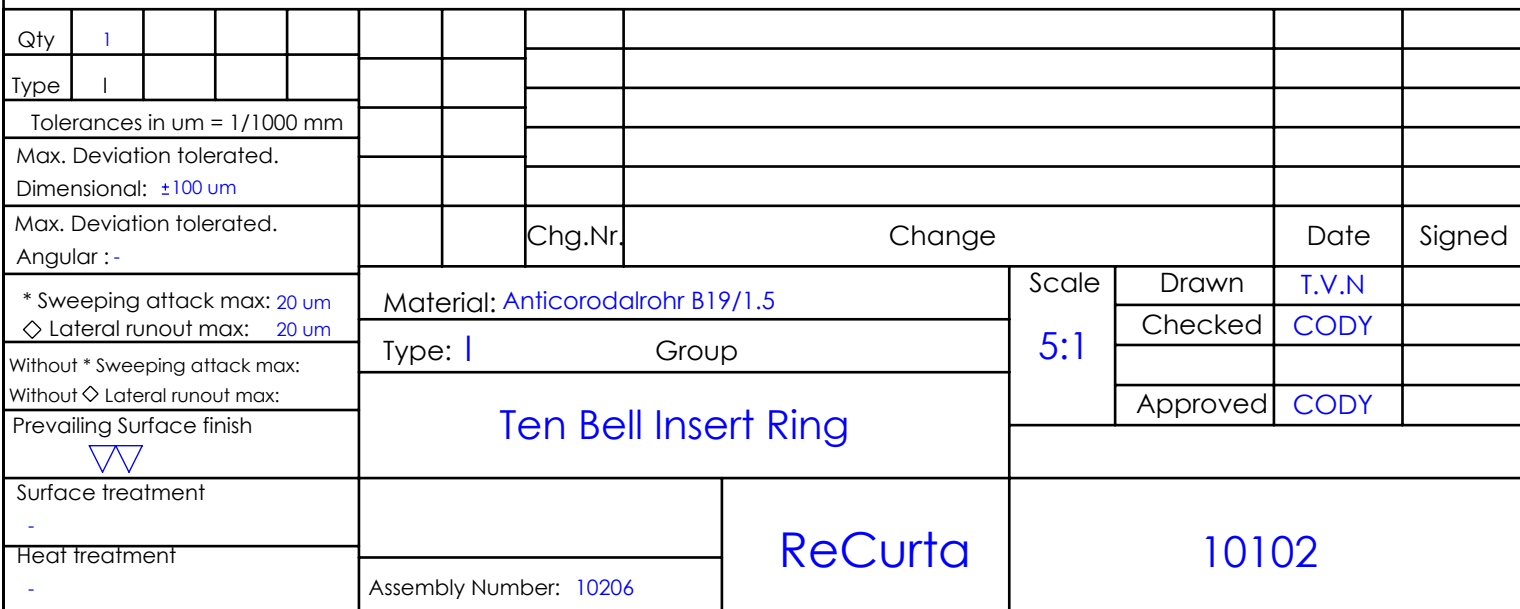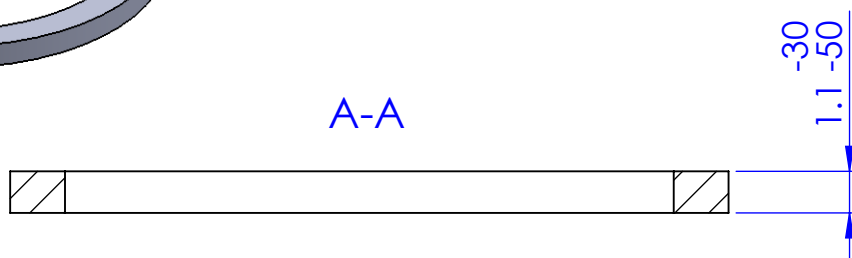

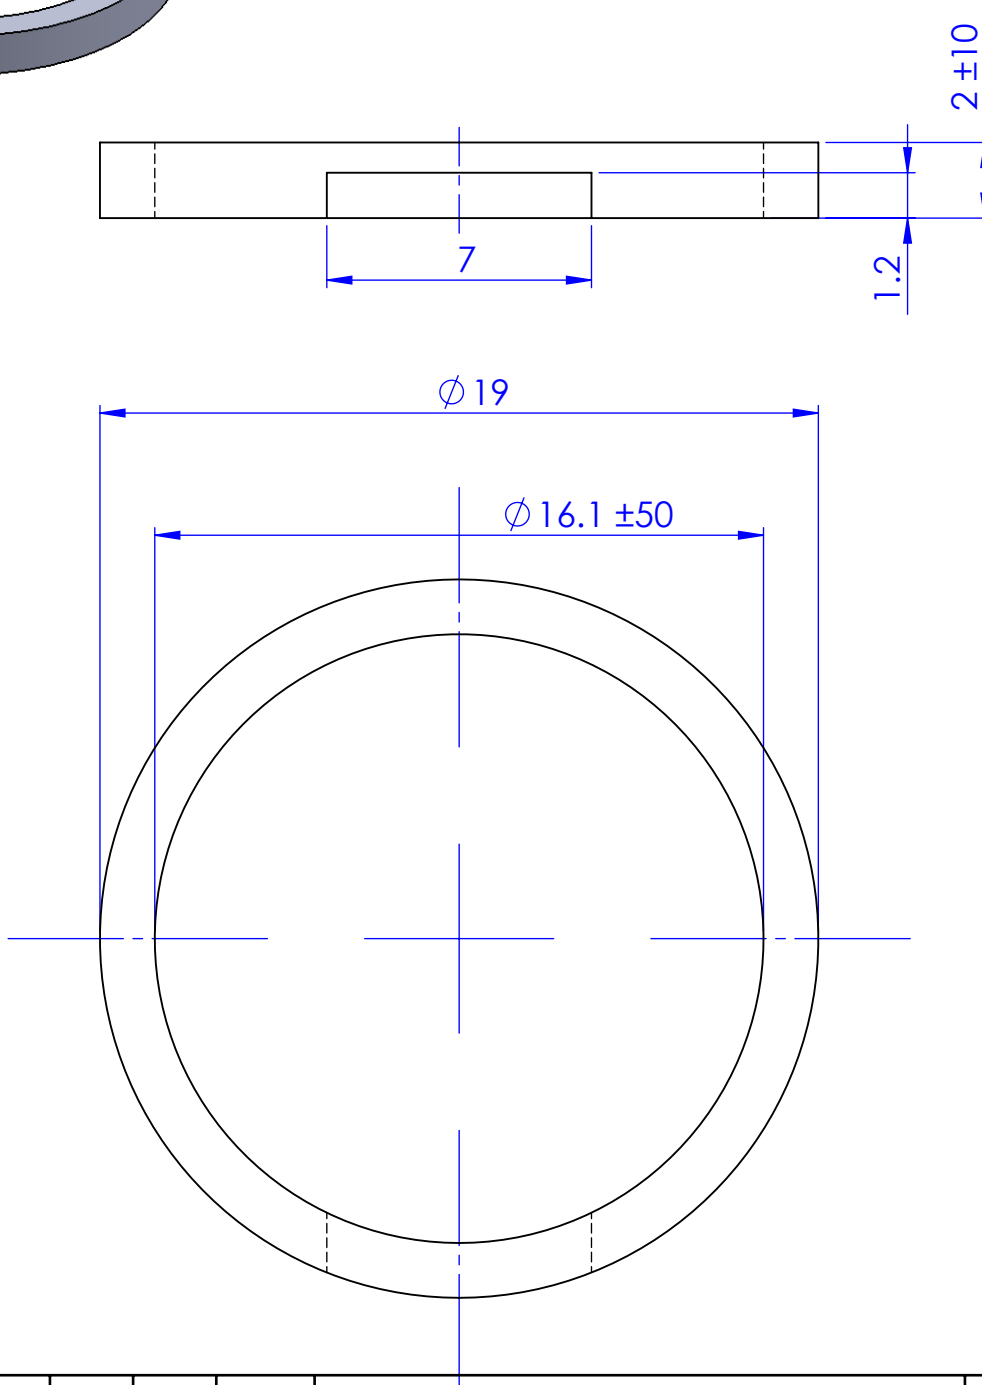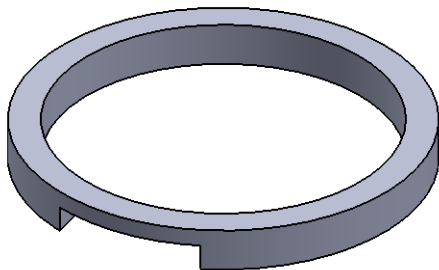
[illegible]

[illegible]

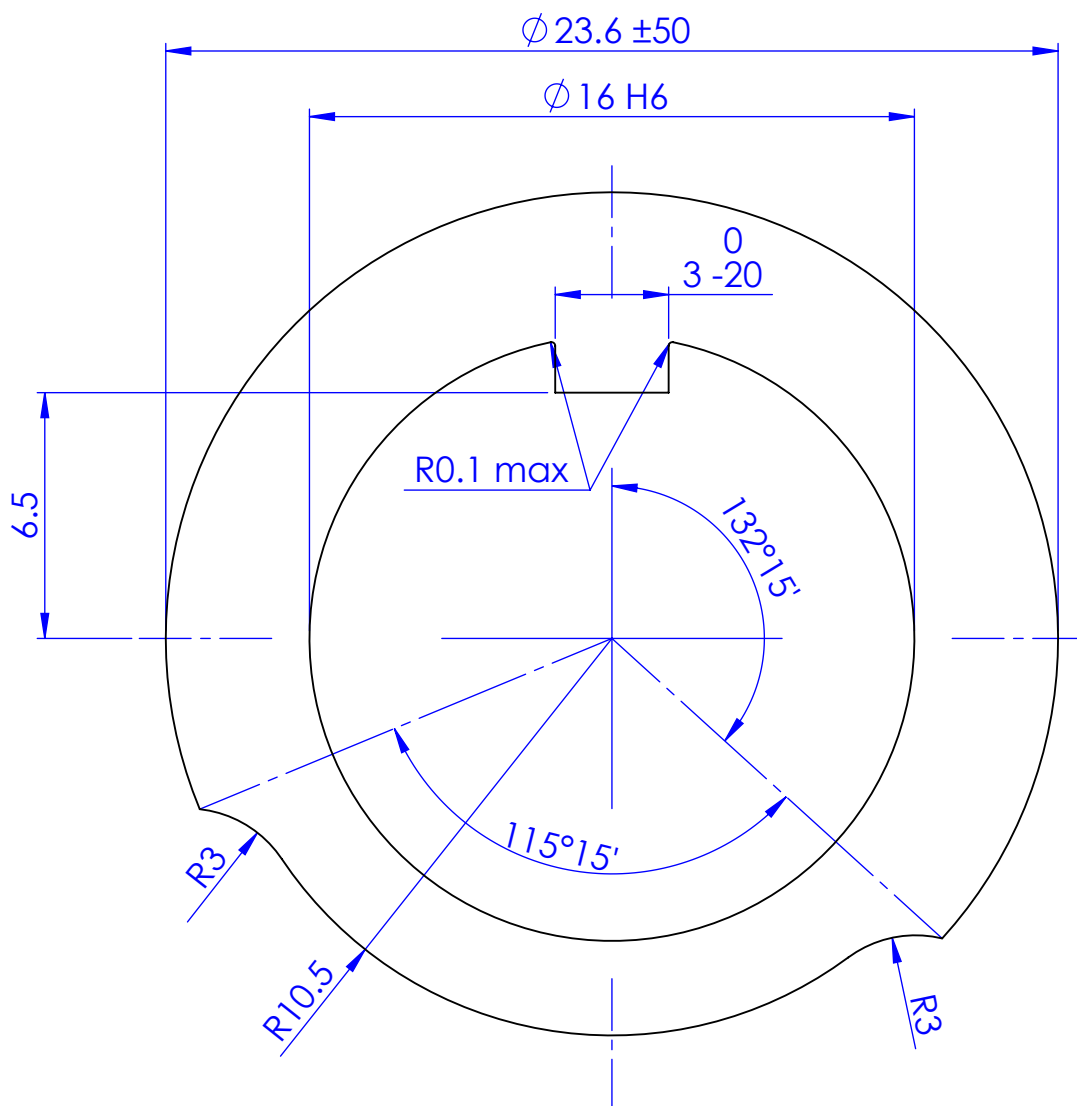 0.8 ± 10 


Qty	I											
Type	I											
Tolerances in um = 1/1000 mm												
Max. Deviation tolerated.												
Dimensional: ±100 um												
Max. Deviation tolerated.												
Angular : ±30'								Chg.Nr.	Change	Date	Signed	
* Sweeping attack max: 20 um ◇ Lateral runout max: 20 um						Material: Nichtr.Bandstahl, hartgewalzt 0.8 ± 10 Brin 230-240						
Without * Sweeping attack max: 50 um Without ◇Lateral runout max:						Type: I Group						
Prevailing Surface finish						Turn Counter Lock Ring						
Surface treatment						ReCurta						
Heat treatment												
						Assembly Number: 10206						
						Scale		Drawn	T.V.N			
						5:1		Checked	CODY			
								Approved	CODY			
						10105-2						



 0.5 ± 10 [illegible]



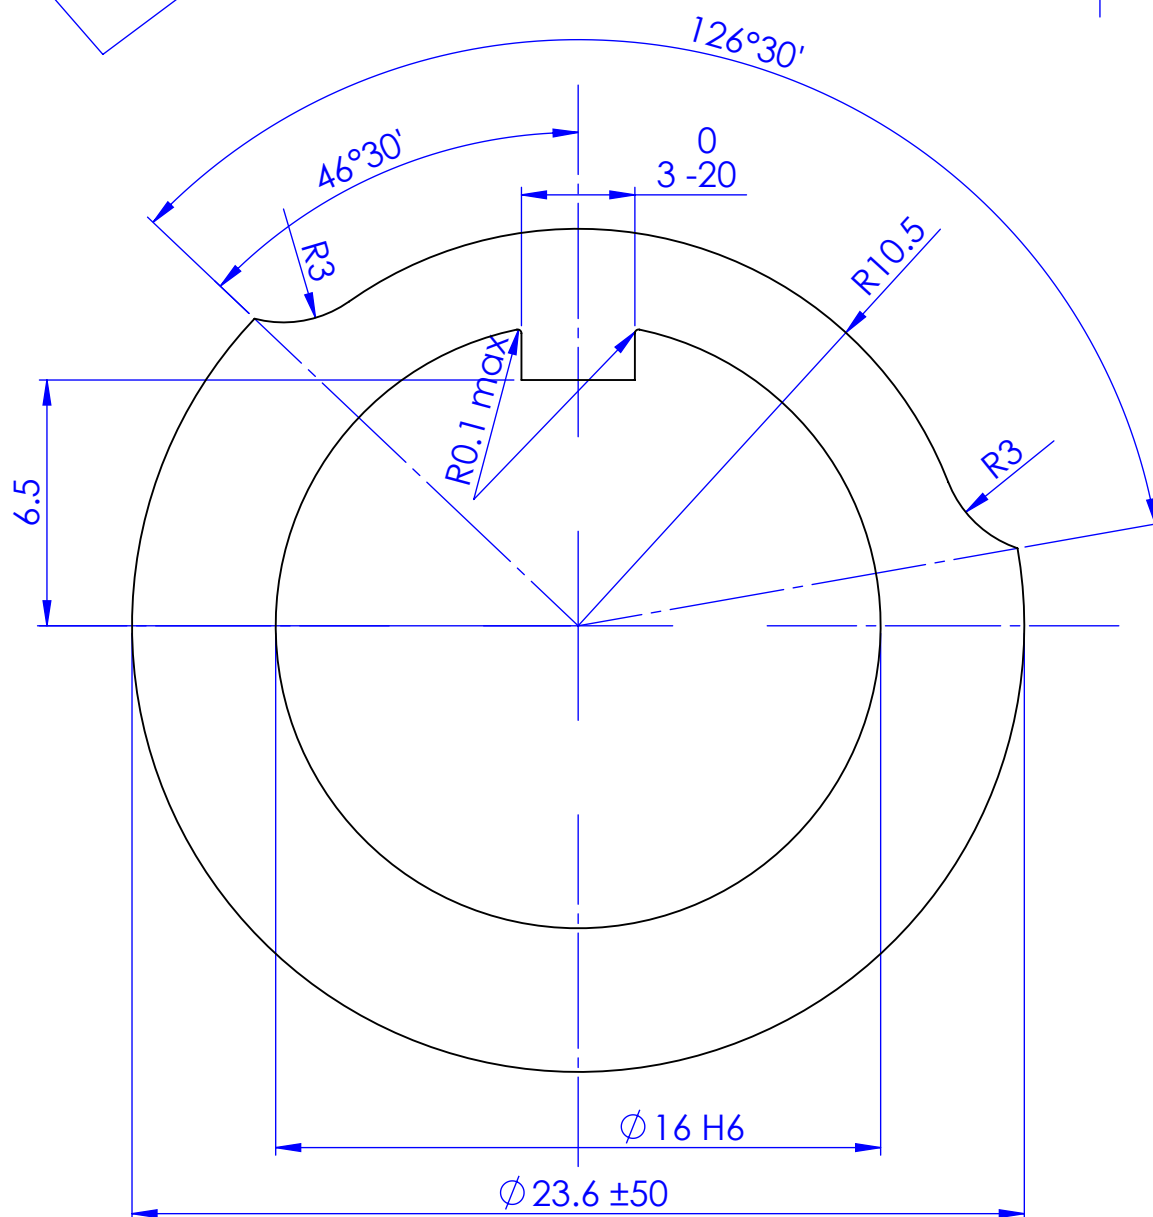

$$\underline{0.8 \pm 10}$$


Dimension in bracket are auxiliary dimension without consideration of tolerance

[illegible]

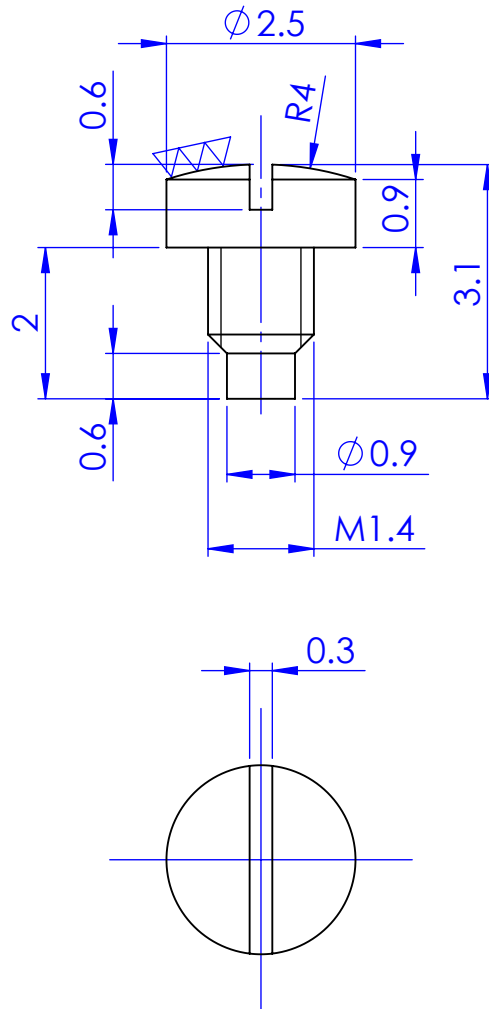

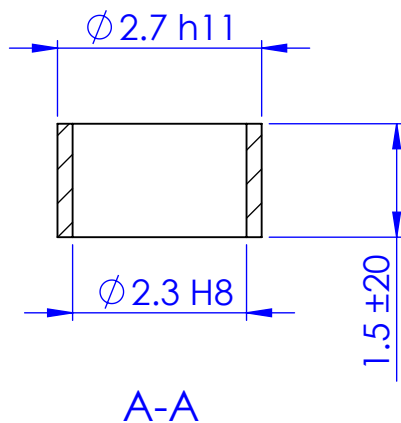


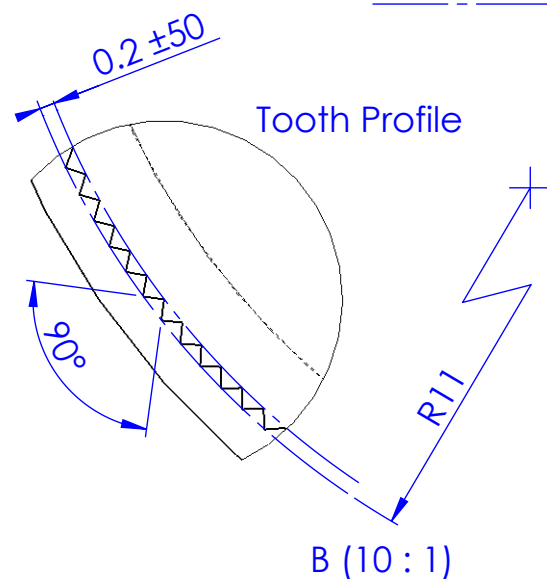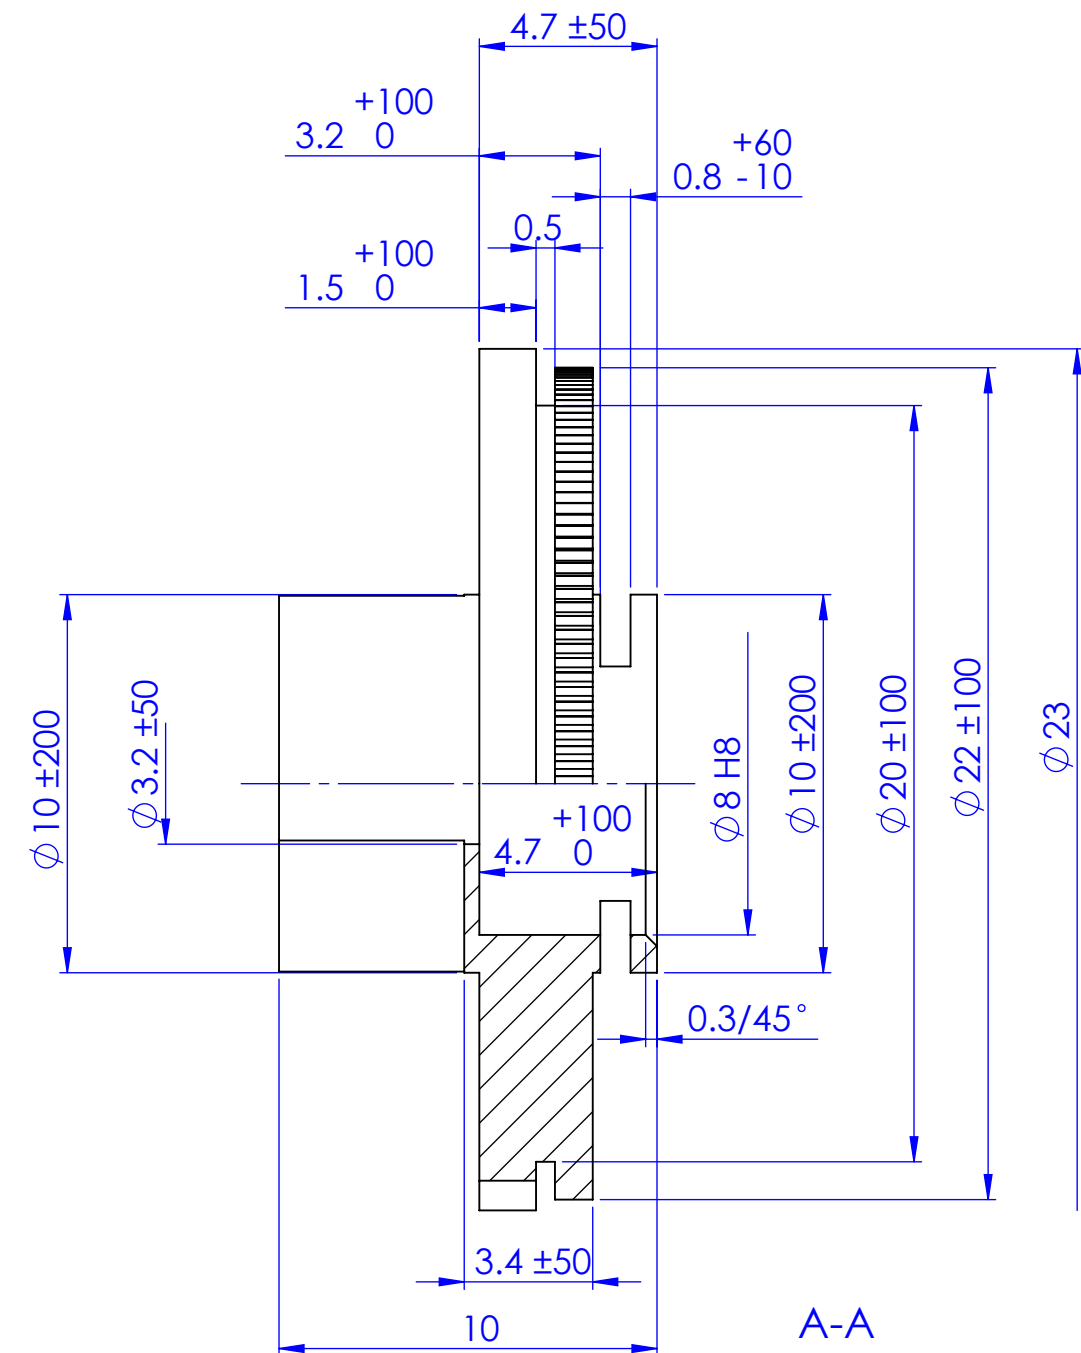



Max.Deviation of milled R3.5
to slot center ± 30


Dimension in bracket are auxiliary dimension without consideration of tolerance


[illegible]


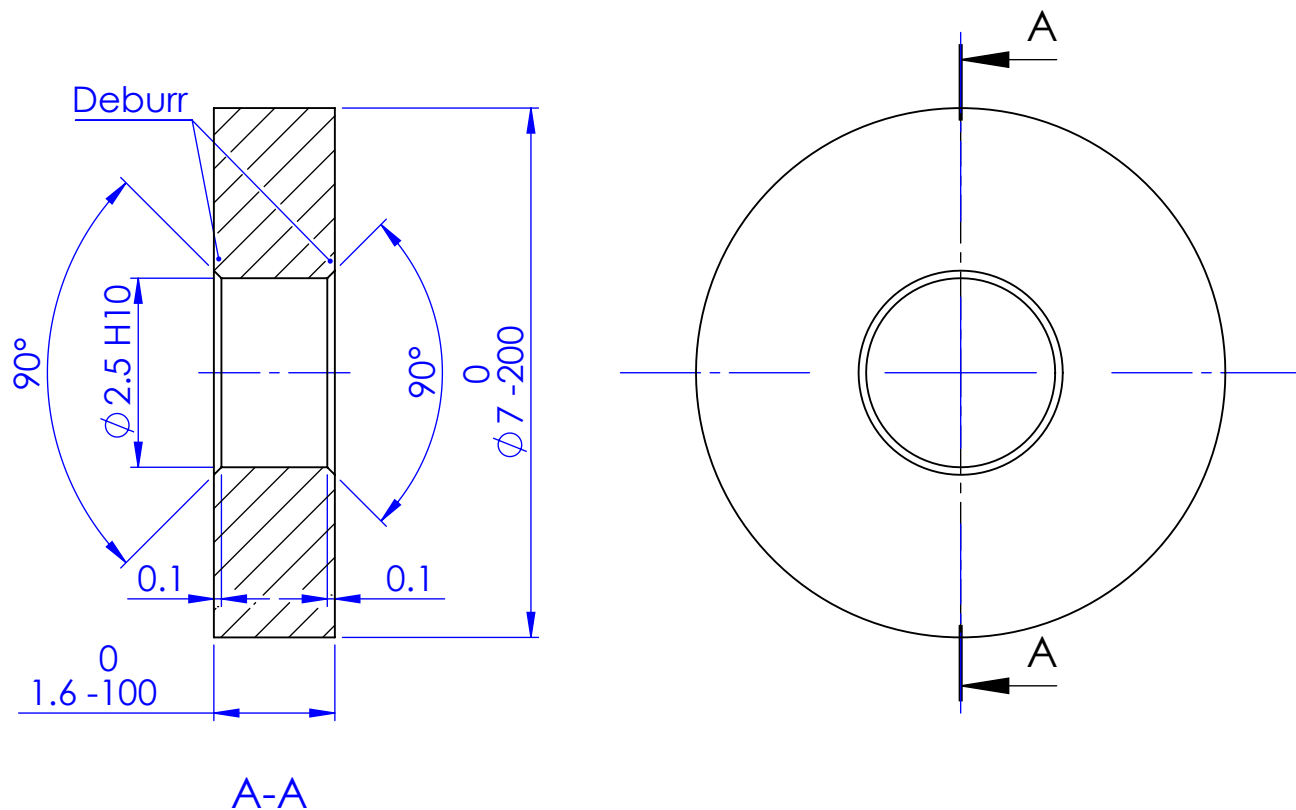




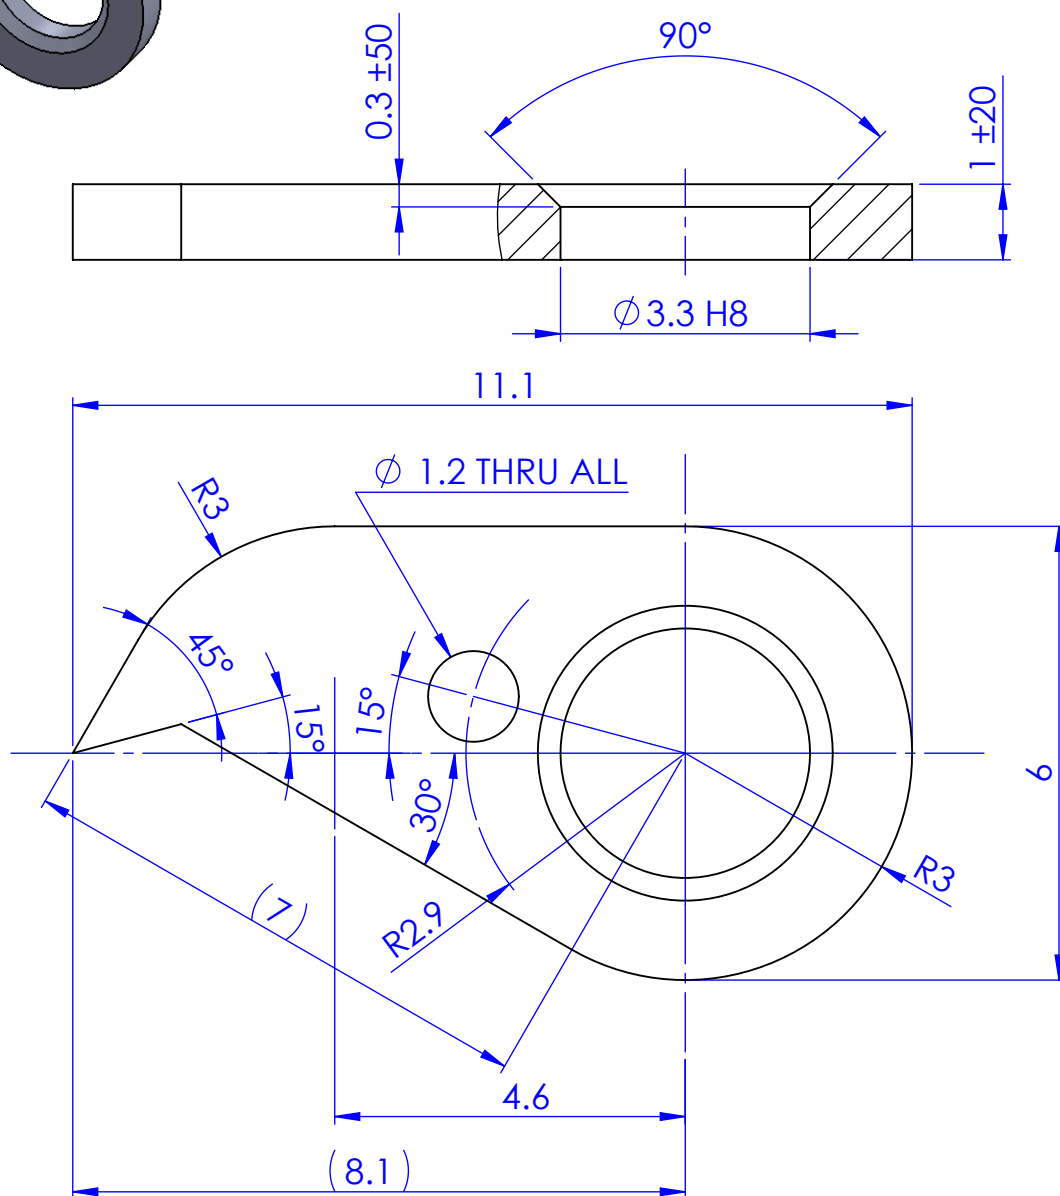
[illegible]

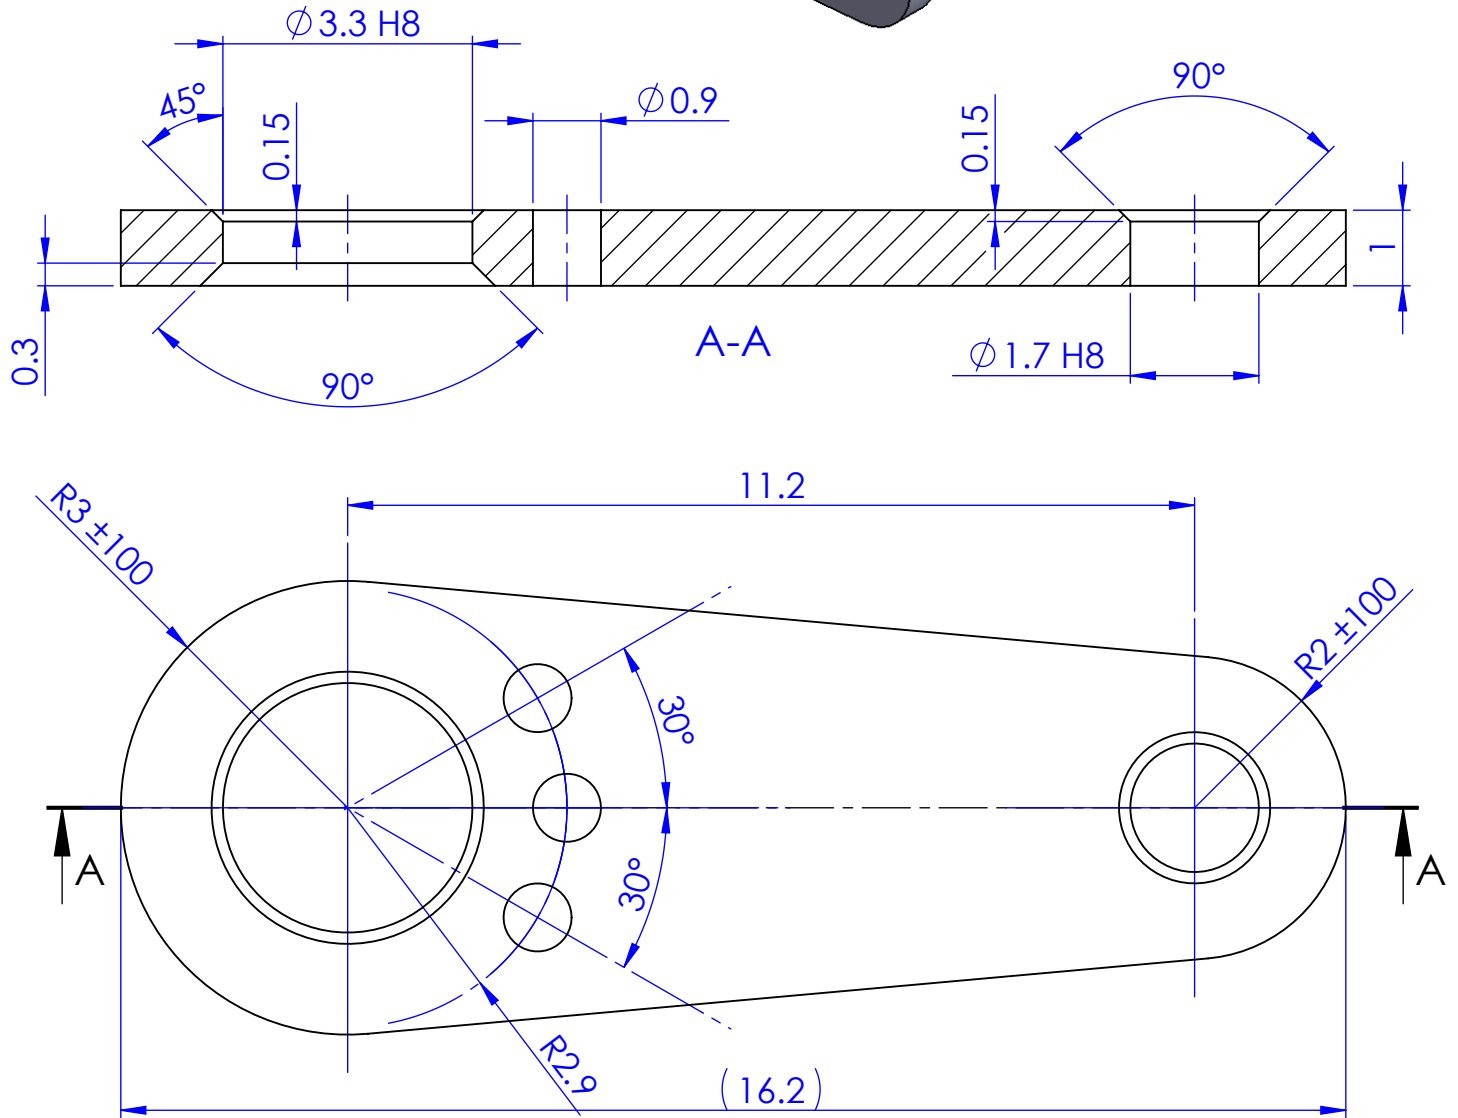[illegible]

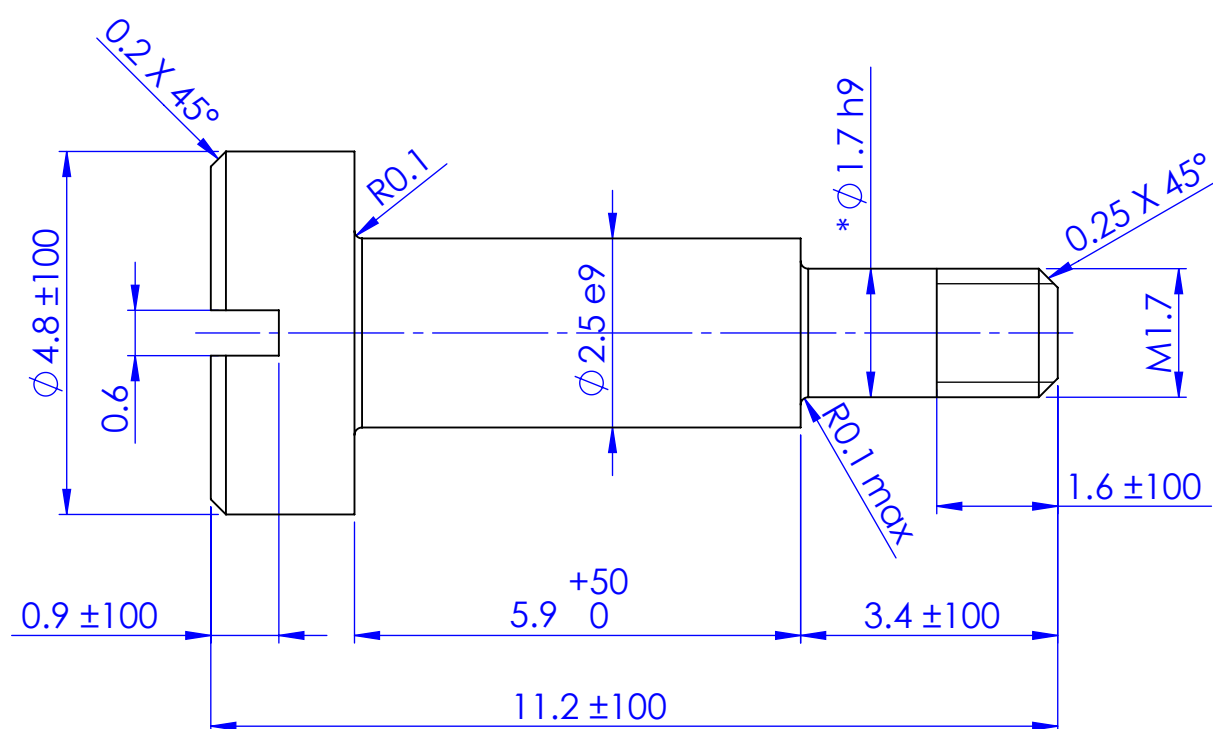


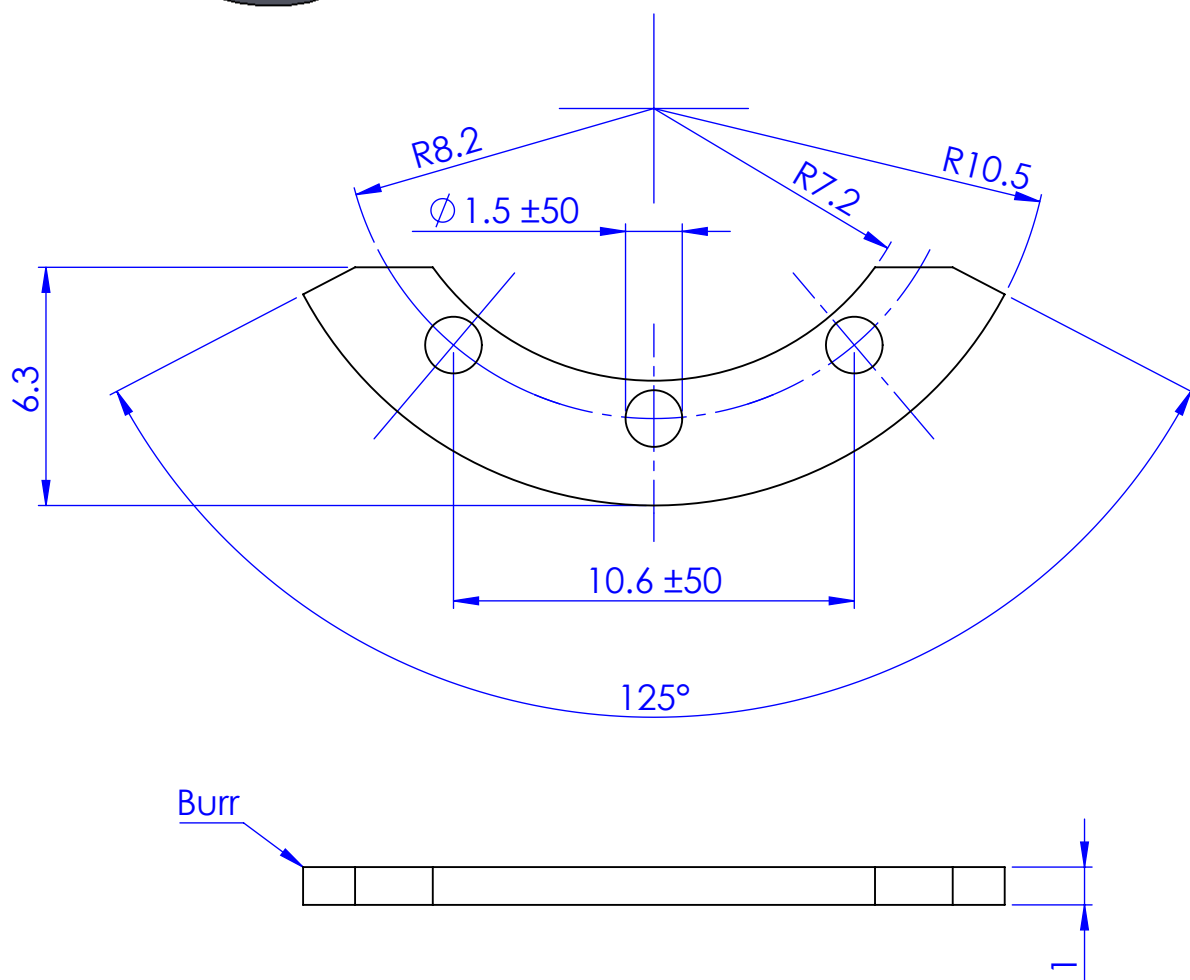
[illegible]

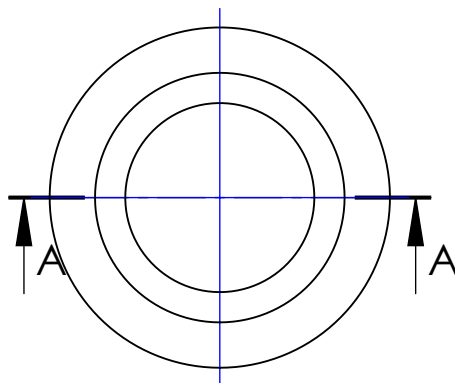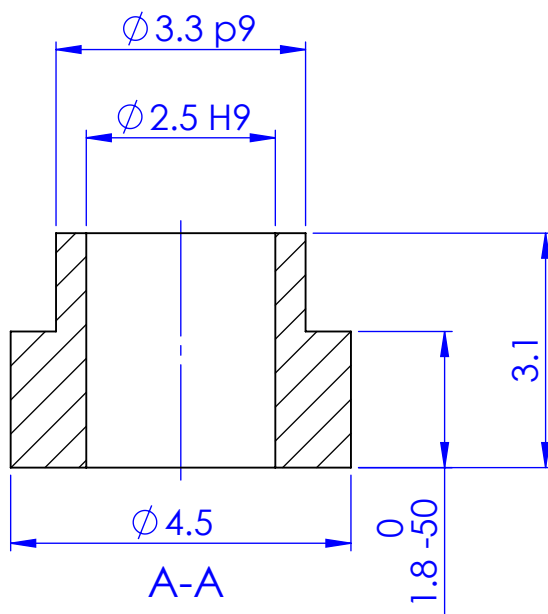[illegible]

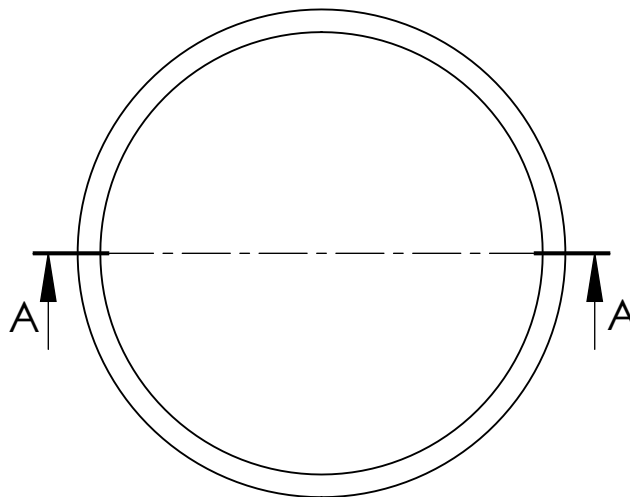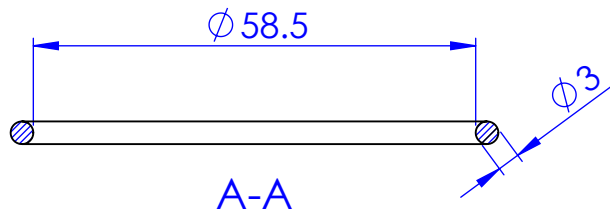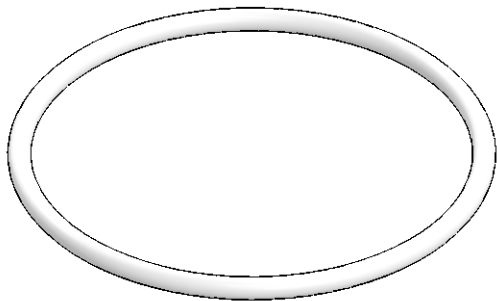

Dimension in bracket are auxiliary dimension without consideration of tolerance


Qty	1																	
Type	I																	
Tolerances in um = 1/1000 mm																		
Max. Deviation tolerated.																		
Dimensional: ±200 um																		
Max. Deviation tolerated.							Chg.Nr.	Change				Date	Signed					
Angular :					Material: Natur Gummi 55 Shore 58.5 x 3							Scale	Drawn	T.V.N				
* Sweeping attack max: 20 um ◇ Lateral runout max: 20 um												Type: I	Group	1:1	Checked	CODY		
Without * Sweeping attack max: 50 um Without ◇ Lateral runout max: 50 um																		
Prevailing Surface finish															Contener Tightening Ring			
Surface treatment					ReCurta			10124-1										
Heat treatment																		
					Assembly Number: 10228													

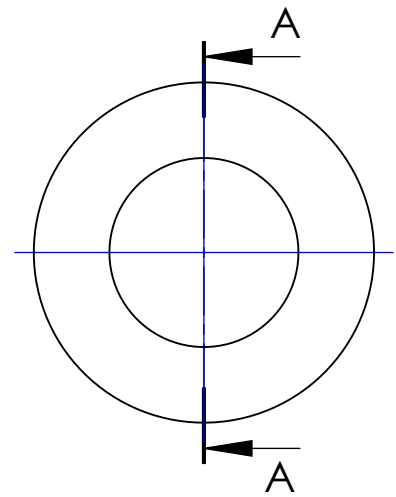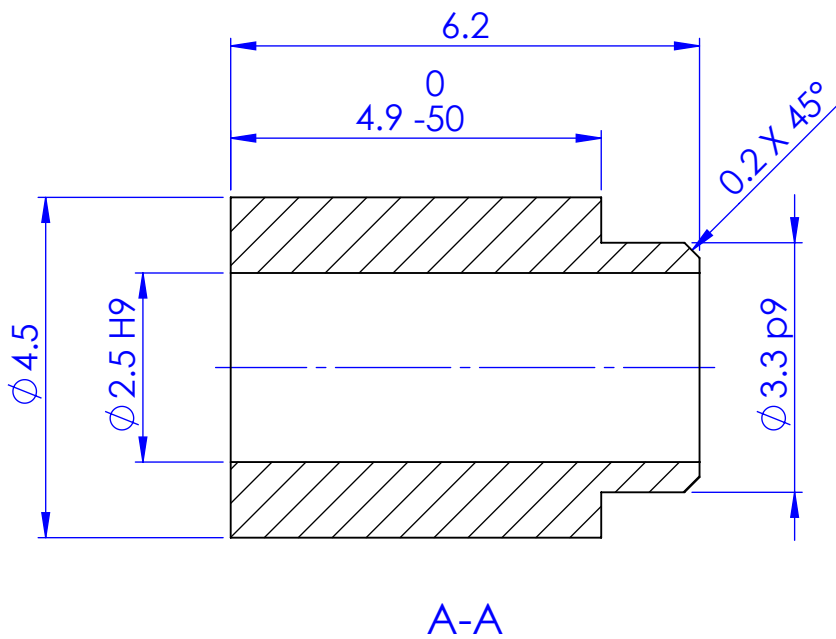
[illegible]





White anodized


[illegible]

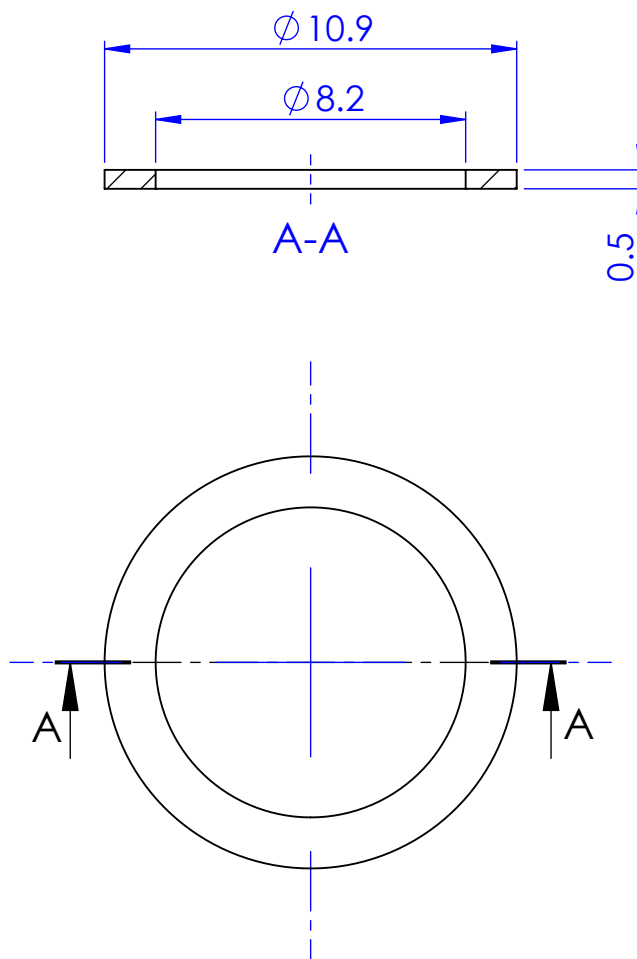
[illegible]

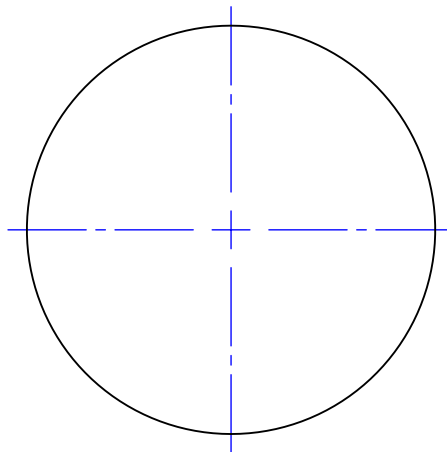[illegible]

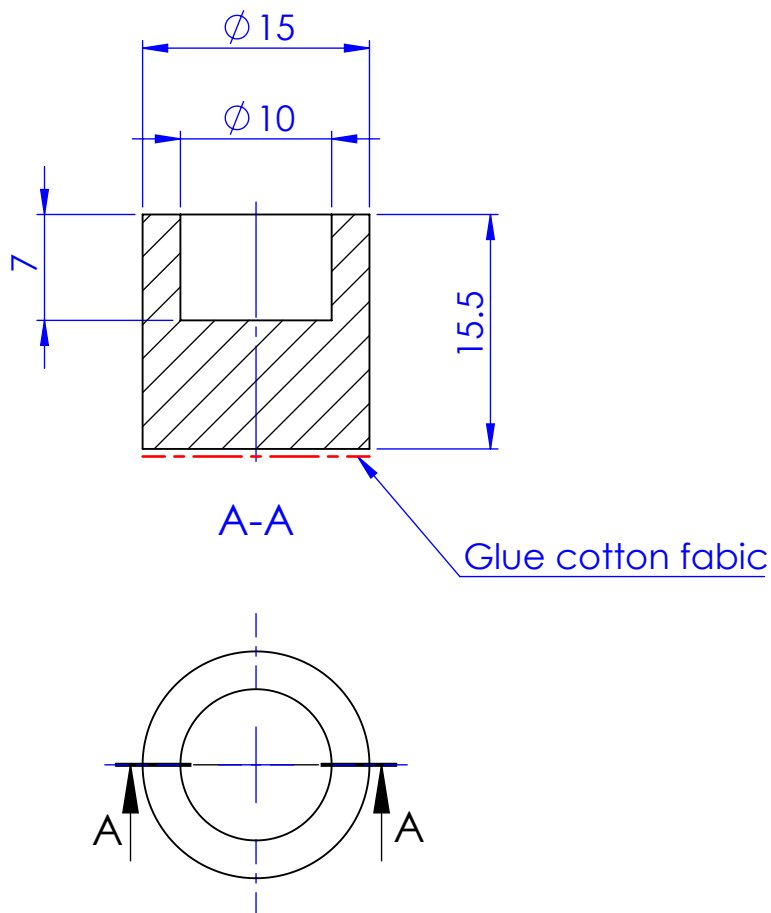[illegible]

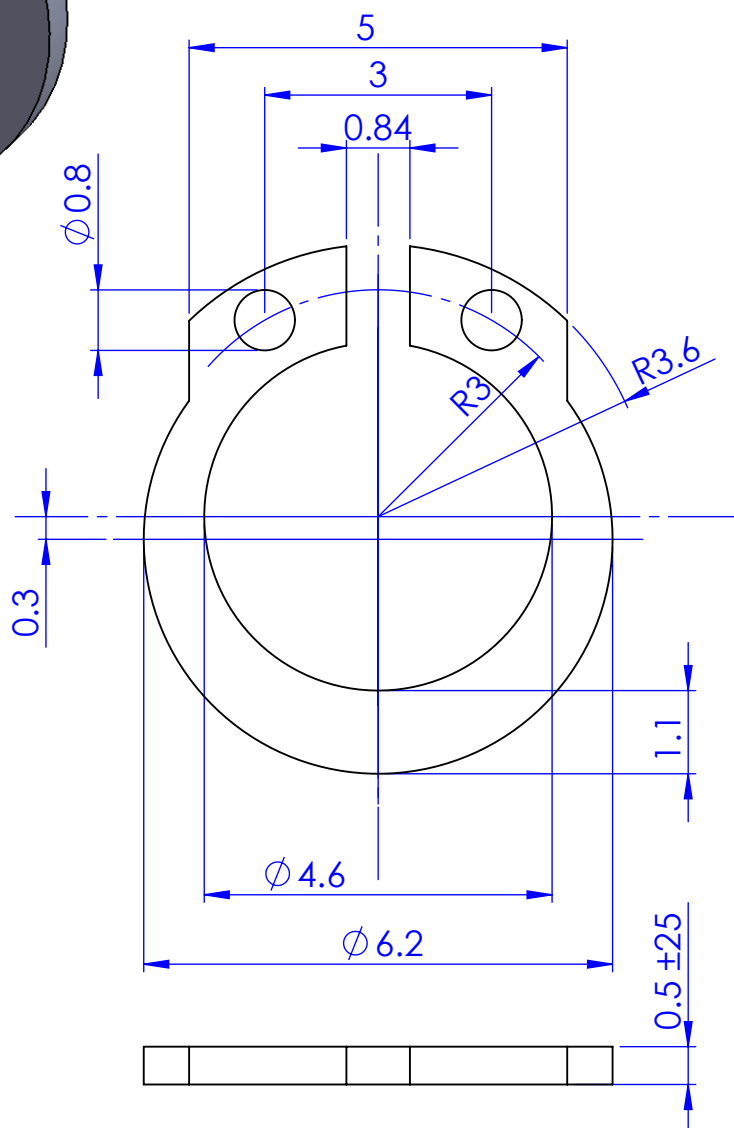
[illegible]


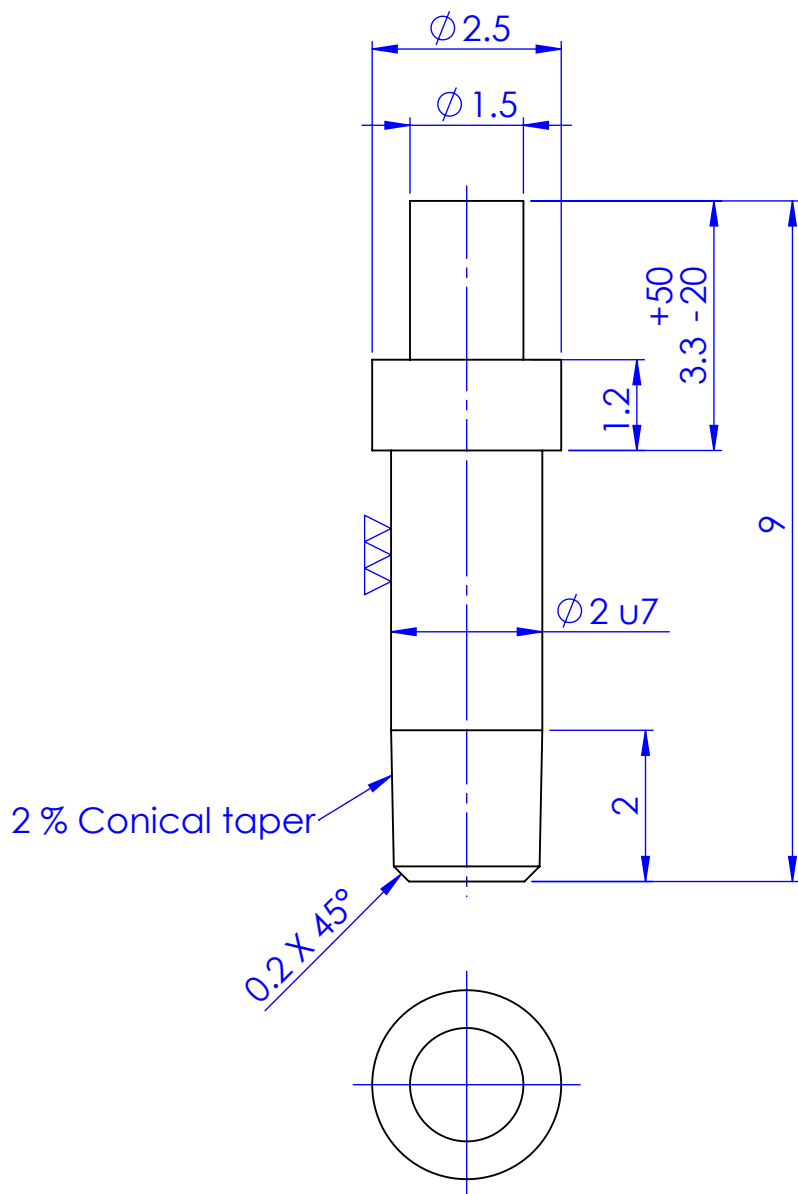
[illegible]

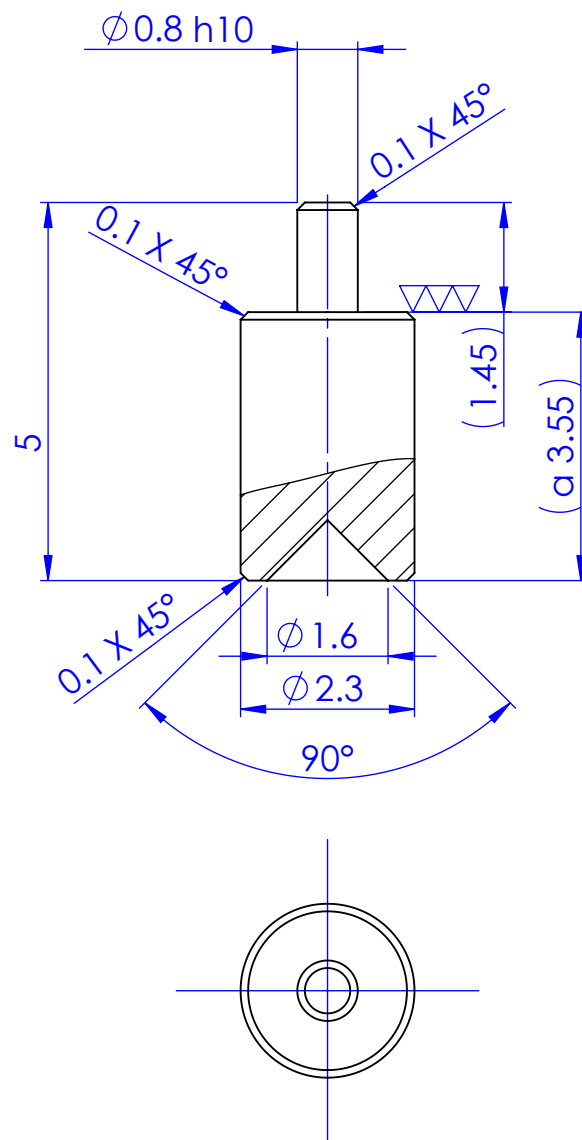



Pos	Dimension of a ± 15
1	3.38
2	3.41
3	3.44
4	3.47
5	3.50
6	3.53
7	3.56
8	3.59

[illegible]

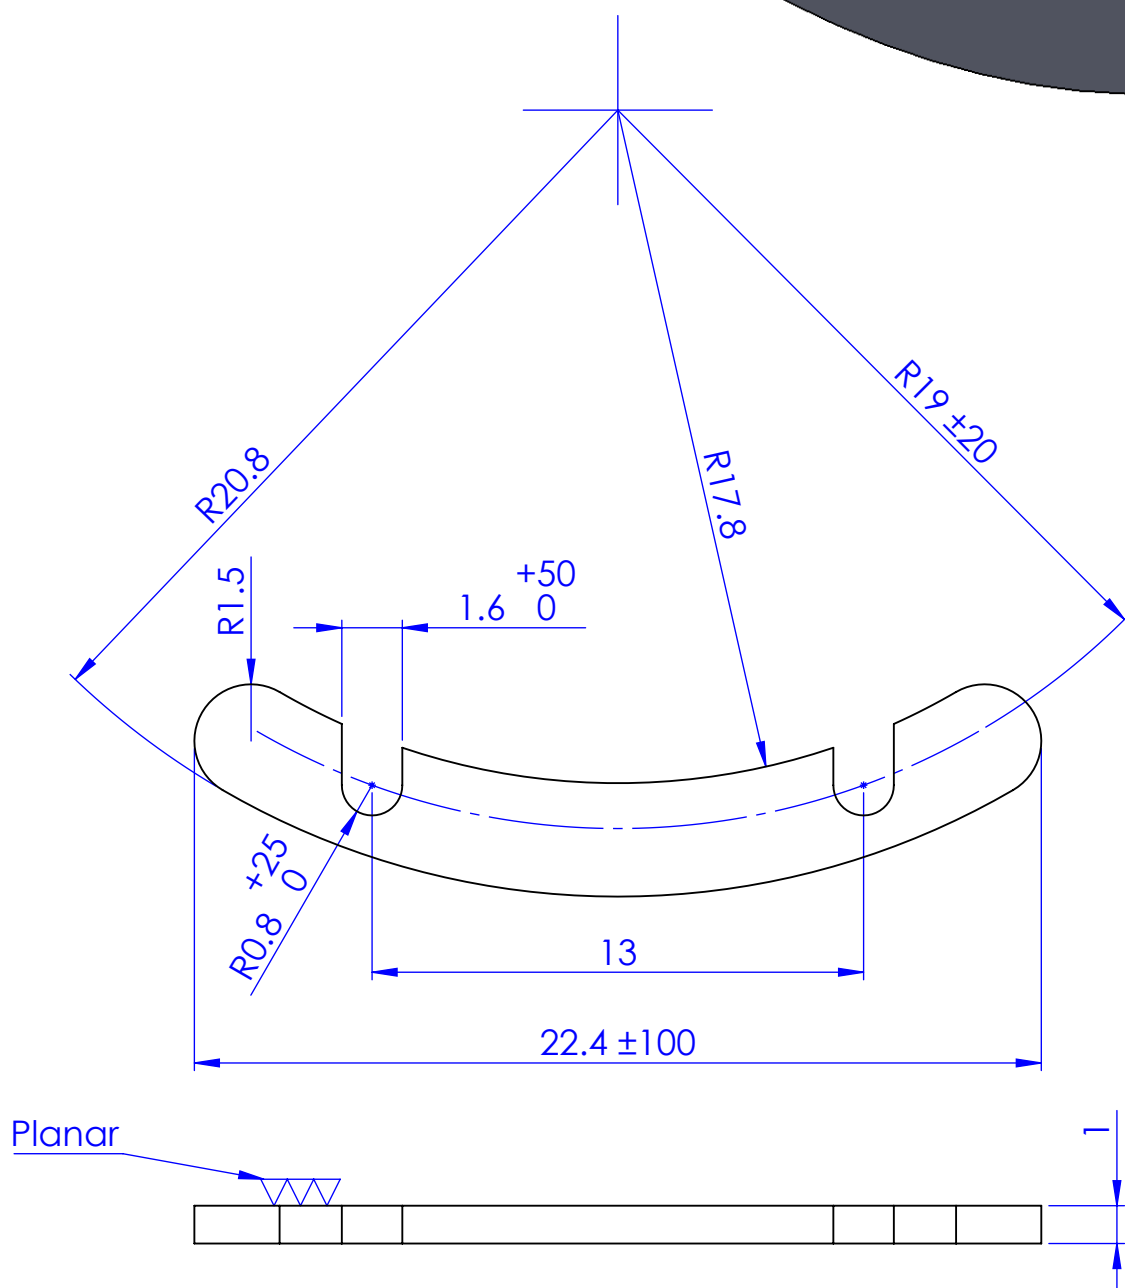[illegible]


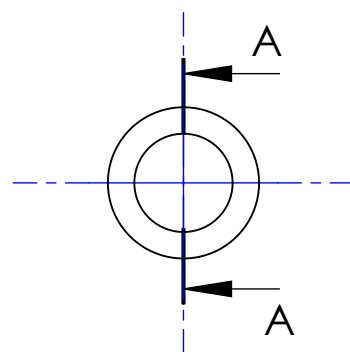
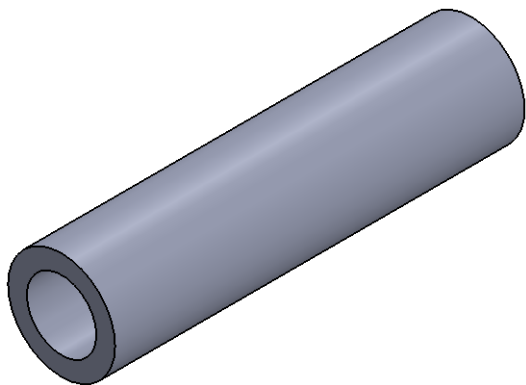
[illegible]

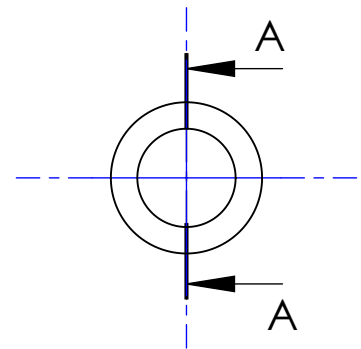[illegible]

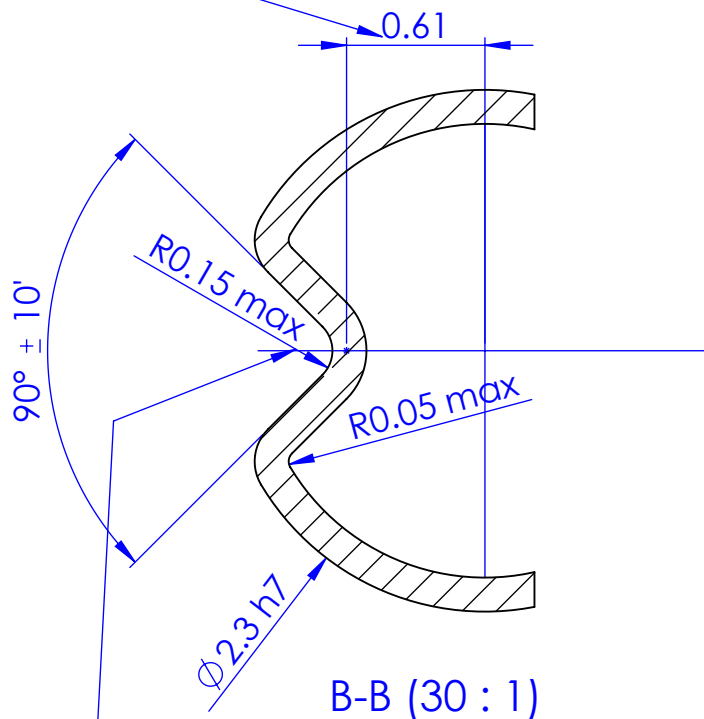



Centricity of the notch $\pm 20 \text{ } \mu\text{m}$

Qty	16																			
Type	I																			
Tolerances in um = 1/1000 mm																				
Max. Deviation tolerated.																				
Dimensional: -																				
Max. Deviation tolerated.								Chg.Nr.	Change							Date	Signed			
Angular :																				
* Sweeping attack max: 20 um ◇ Lateral runout max: 20 um						Material: Messing 58 Pb Ø 2.7 h11									Scale 10:1	Drawn	T.V.N			
						Type: I//I Group										Checked	CODY			
Without * Sweeping attack max:50 um Without ◇Lateral runout max: 50 um						Guide Sleeve For Transmission Gears														
Prevailing Surface finish ▽▽(▽▽▽)																				
Surface treatment -												ReCurta	10140-2							
Heat treatment 1/2 Stunde gealugt ayf 300 ~ 320 °						Assembly Number: 10230/221														

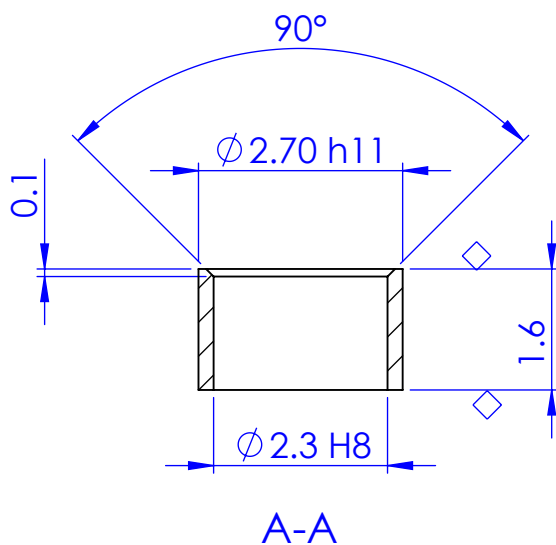



Qty	17														
Type	I														
Tolerances in um = 1/1000 mm															
Max. Deviation tolerated.															
Dimensional: ±50 um															
Max. Deviation tolerated.							Chg.Nr.	Change				Date	Signed		
Angular :															
* Sweeping attack max: 20 um					Material: Messing 58 Pb Ø 2.7 h11					Scale	Drawn	T.V.N			
◇ Lateral runout max: 20 um											10:1	Checked	CODY		
Without * Sweeping attack max:50 um					Type: I	Group									
Without ◇Lateral runout max:					Ferrule							Approved	CODY		
Prevailing Surface finish															
															
Surface treatment										ReCurta			10141		
-															
Heat treatment					Assembly Number: 10230/231/222										
					2522										

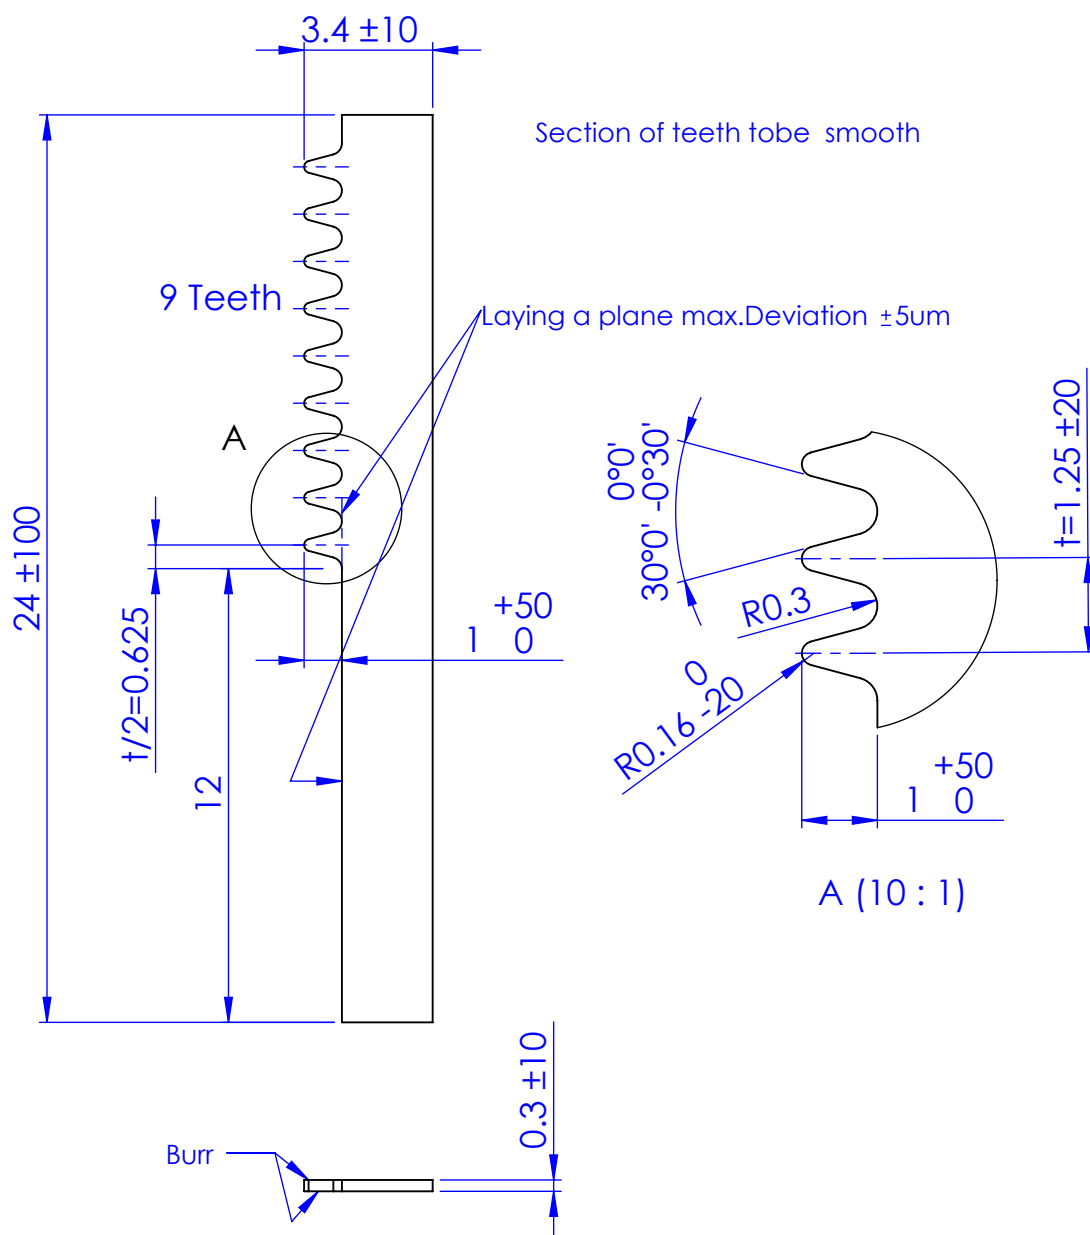


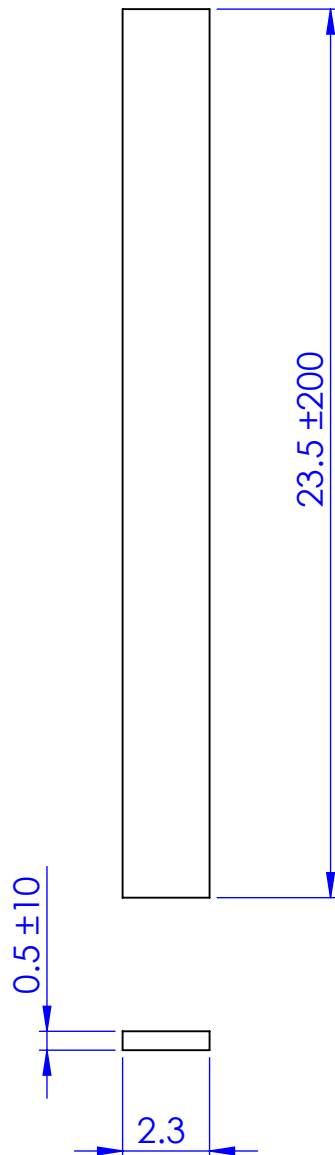




Qty	1												
Type	I												
Tolerances in um = 1/1000 mm													
Max. Deviation tolerated.													
Dimensional: ±50 um													
Max. Deviation tolerated.							Chg.Nr.	Change			Date	Signed	
Angular :													
* Sweeping attack max: 20 um					Material: Stahlband hart 0.5 ± 10(nichtrostend)					Scale 5:1	Drawn	T.V.N	
◇ Lateral runout max: 20 um					Type: I Group						Checked	CODY	
Without * Sweeping attack max:-					Spacer For Clearing Plate								
Without ◇Lateral runout max:											Approved	CODY	
Prevailing Surface finish													
Surface treatment								ReCurta		10143-1			
-													
Heat treatment					Assembly Number: 10247								






Pos	d
1	2.5
2	2.49
3	2.48
4	2.47
5	2.46
6	2.45

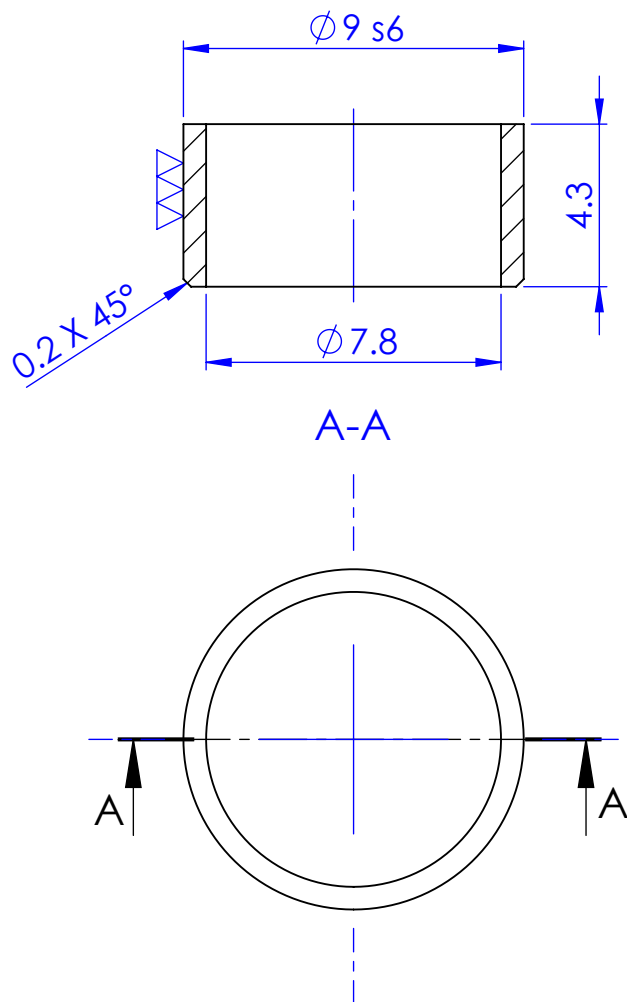


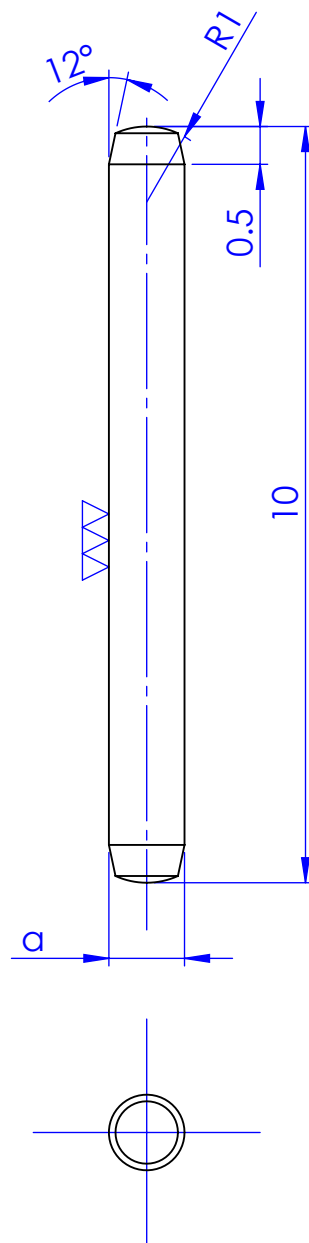


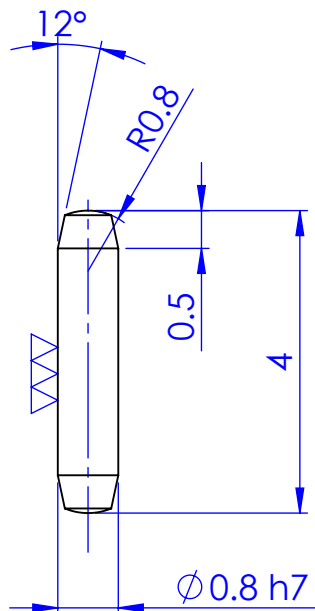


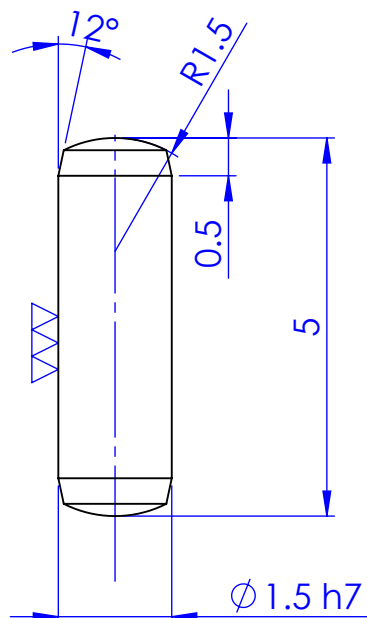


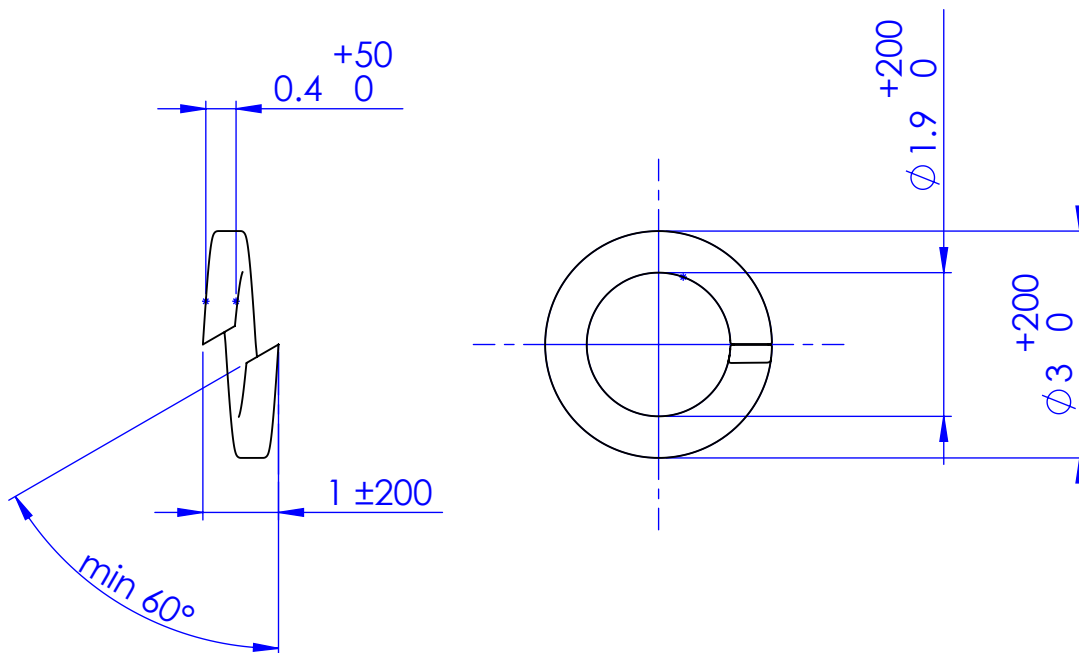[illegible]

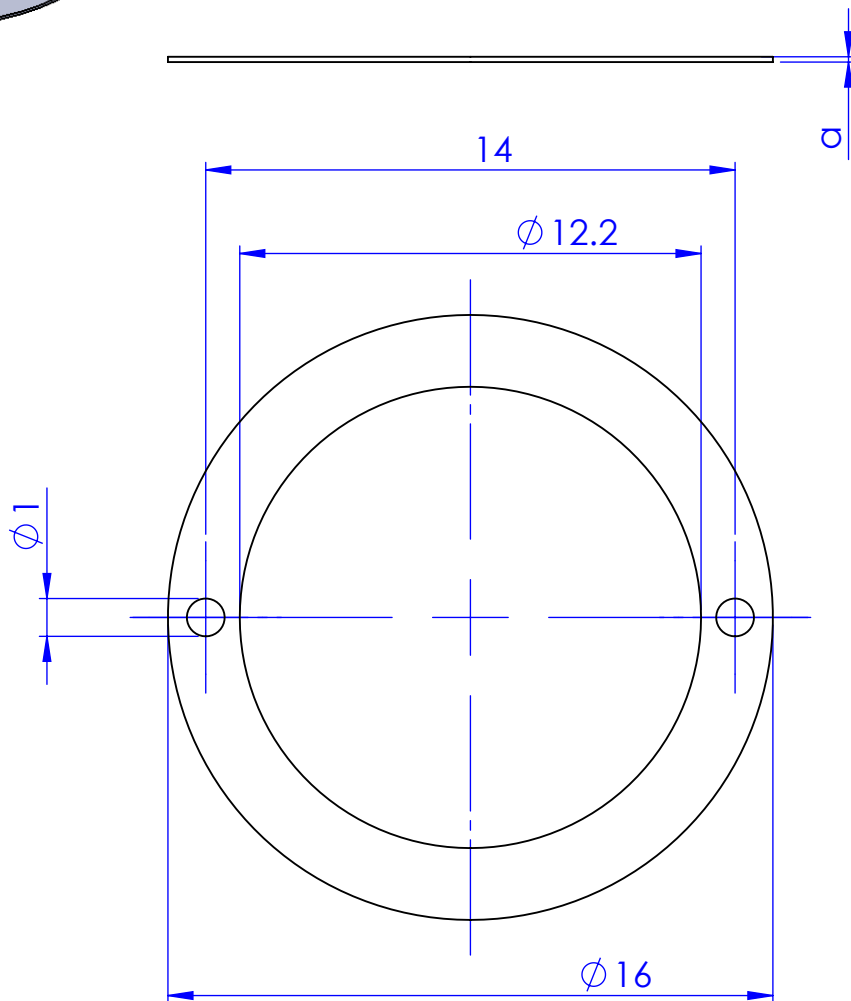
[illegible]

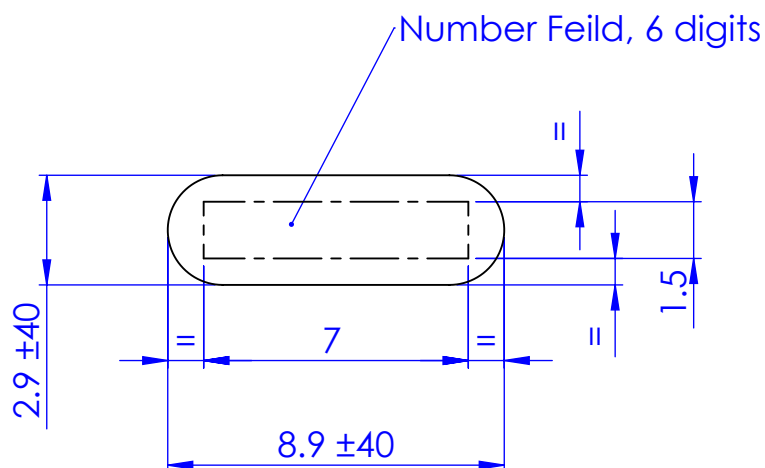[illegible]

[illegible]

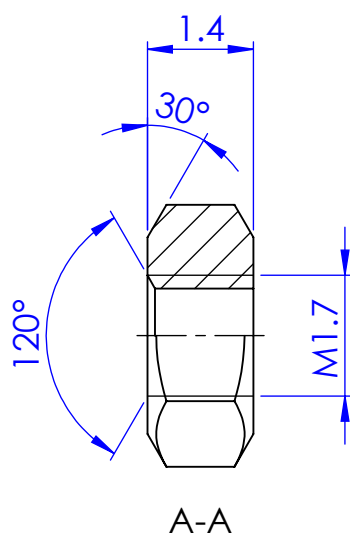

Qty	2													
Type	I													
Tolerances in um = 1/1000 mm														
Max. Deviation tolerated.														
Dimensional: ±100 um														
Max. Deviation tolerated.							Chg.Nr.	Change				Date	Signed	
Angular : ± 2°					Material: Ms 58 Pb 6kt3 Type: Group Hex Nut						Scale	Drawn	T.V.N	
*Sweeping attack max: 20 um ◇ Lateral runout max: 20 um												Checked	CODY	
Without * Sweeping attack max:50 um Without ◇Lateral runout max: 50 um														
Prevailing Surface finish ▽▽												Approved	CODY	
Surface treatment					ReCurta				2074					
Heat treatment														Assembly Number:

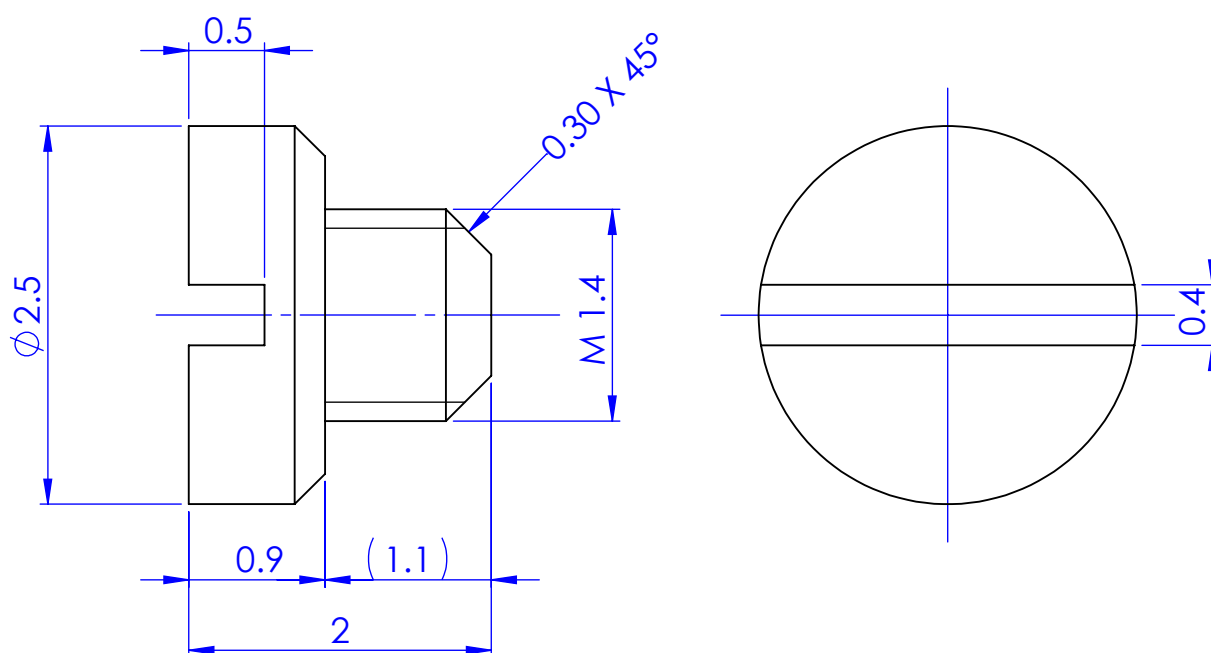[illegible]

